

IS 3360 MX Highbay COM1 - surface, sq.

neva
lux**MOTION DETECTOR**

EAN 4007841033569

E-Nr. 535946400

 **steinel**

65 x 95 x 95 mm



IS 3360 MX Highbay COM1 - surface, sq.

MOTION DETECTOR

EAN 4007841033569

E-Nr. 535946400

Technical Data

IDENTIFICATION					
Version	Motion detectors	With motion detector	Yes	Base light function	No
		Detection angle	360 °	Main light adjustable	No
DIMENSIONS		Opening angle	180 °	Functions	Normal / test mode Manual ON / ON-OFF
Dimensions L x W x H	65 x 95 x 95 mm	Sneak-under protection	Yes	Settings via	Remote control Potentiometers Smart Remote
ELECTRICAL		Segment-by-segment masking	Yes		
Mains connection	220 – 240 V / 50 – 60 Hz	Electronic scalability	No	With remote control	No
Power	2000 W	Mechanical scalability	No	Twilight setting teach	Yes
Switching output 1 resistive	2000 W	Radial range	Ø 14 m (154 m²)	HOUSING & MATERIAL	
Fluorescent lamps ECG	1500 W	Tangential range	Ø 36 m (1018 m²)	Protection class (IP)	IP54
Fluorescent lamps uncompensated	1000 VA	Switching zones	1416 switching zones	Ambient temperature	from -20 up to 50 °C
Fluorescent lamps series-compensated	400 VA	Mounting height	4,00 – 14,00 m	Housing material	Plastic
Fluorescent lamps parallel-compensated	400 VA	Optimal mounting height	12 m	Cover material	Plastic, opal
Switching output 1 low-voltage halogen lamps	2000 VA	CONNECTIVITY		Cover material (scope of delivery)	shrouds
LED lamps < 2 W	100 W	Networking	Yes	Mounting location	ceiling
LED lamps > 2 W < 8 W	300 W	Type of networking	Master/master	Application location	Indoors
LED lamps > 8 W	600 W	Networking via	Cable	Mounting type	Surface wiring
Capacitive load in µF	176 µF	Networking quantity	max. 10 sensors	Material	Plastic
Own consumption	0,26 W	LIGHTING TECHNOLOGY		Application room	Indoors high-bay warehouse sports hall
Switching output 1 number of LED/fluorescent lamps	8 pcs.	Soft light start	No	Colour	white
SENSOR TECHNOLOGY		Continuous light	selectable, 4h	RAL colour	9003
Max. mounting height	14,00 m	Constant light regulation	No	SCOPE OF DELIVERY & WARRANTY	
Sensor technology	passive infrared	SETTINGS		Manufacturer warranty	5 years
		Twilight switch	Yes	Corner wall bracket included	No
		Twilight setting	2 – 1000 lx		
		Time setting	5 s – 15 Min.		

IS 3360 MX Highbay COM1 - surface, sq.

MOTION DETECTOR

EAN 4007841033569

E-Nr. 535946400

Illustrations

TECHNICAL DRAWINGS



65 x 95 x 95 mm

MOUNTING HEIGHT

4,00 – 14,00 m BEREICH	12 m OPTIMAL	14,00 m MAX
---------------------------	-----------------	----------------

IS 3360 MX Highbay COM1 - surface, sq.


MOTION DETECTOR

EAN 4007841033569

E-Nr. 535946400


Wiring Diagrams

WIRING DIAGRAM 1

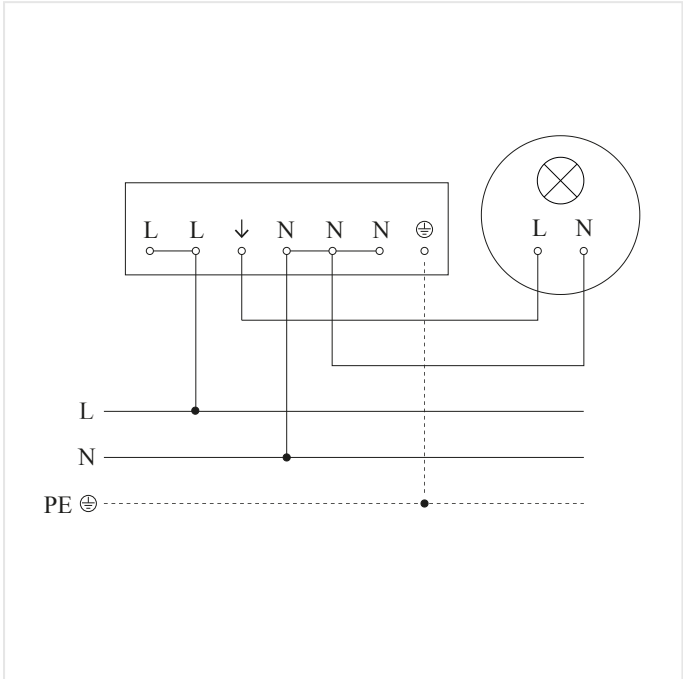

Master circuit diagram

WIRING DIAGRAM 2

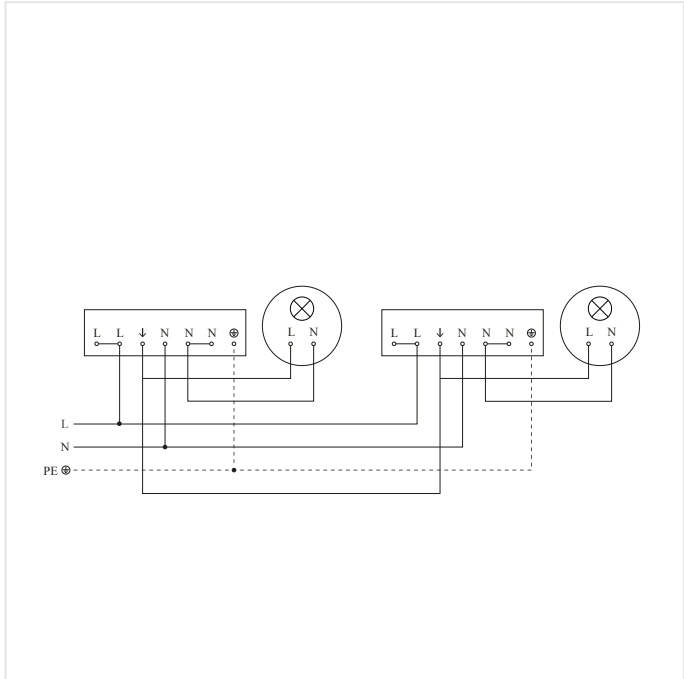

Master/slave interconnection circuit diagram

IS 3360 MX Highbay COM1 - surface, sq.

MOTION DETECTOR

EAN 4007841033569

E-Nr. 535946400

Highlights



UV-resistant plastic



Large terminal compartment



Optional remote controls

IS 3360 MX Highbay COM1 - surface, sq.
MOTION DETECTOR

EAN 4007841033569
E-Nr. 535946400

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

033569

EAN

4007841033569

E-Number

535946400

Typ

IS 3360 MX Highbay COM1 - surface, sq.

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss