

RS PRO R20 basic SC MP5 Neutral white

neva
lux**SENSOR-SWITCHED LED INDOOR LIGHT**

EAN 4007841068448

E-Nr. 941349339

 **steinel**

350 x 55 mm



RS PRO R20 basic SC MP5 Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068448

E-Nr. 941349339

Technical Data

DIMENSIONS	LED cooling system	Passive Thermo Control	Base light function percent from	0 %
Dimensions Ø x H	Continuous light	selectable		
ELECTRICAL	LIFETIME		HOUSING & MATERIAL	
Mains connection	Luminous flux decline per LM80	L80B50	Impact resistance	IK07
Power			Protection class (IP)	IP40
Own consumption	SETTINGS		Protection class	II
HF technology	Time setting	5 s – 60 Min.	Ambient temperature	from -20 up to 40 °C
CONNECTIVITY	Base light function	Yes	Housing material	Plastic
Networking	Base light function time	1-60 min	Cover material	PC, opal
Type of networking	Main light adjustable	0 - 100 %	Mounting location	ceiling wall
Networking via	Functions	Group parameterisation Manual ON / ON-OFF Neighbouring group function Orientation light Motions sensor Light sensor Encrypted communication Free selection of the light value in a luminaire group Adjustable fade time when switching on and off	Application location	Indoors
Slave mode adjustable	Settings via	Bluetooth	Mounting type	Surface wiring
LIGHTING TECHNOLOGY	With remote control	No	Material	Plastic
Measured luminous flux 360°	Base light function in percent	0 – 100 %	Application room	Indoors changing room corridor / aisle function room / ancillary room kitchenette stairwell
Colour temperature			SCOPE OF DELIVERY & WARRANTY	
With illuminant			Manufacturer warranty	5 years
Illuminant			House number sheet included	No
Base				

RS PRO R20 basic SC MP5 Neutral white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068448

E-Nr. 941349339

Illustrations

TECHNICAL DRAWINGS

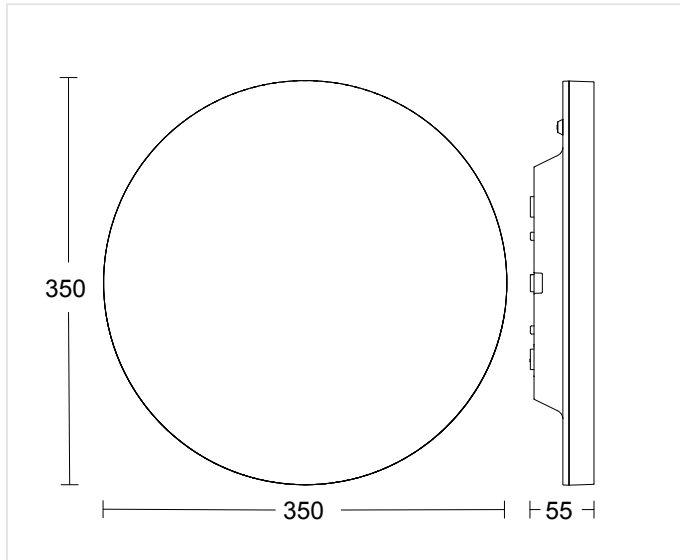

350 x 55 mm



RS PRO R20 basic SC MP5 Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068448

E-Nr. 941349339

Wiring Diagrams

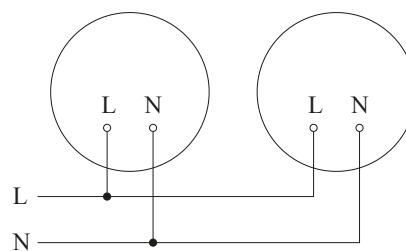WIRING DIAGRAM 1**WIRING DIAGRAM 2**

RS PRO R20 basic SC MP5 Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT


EAN 4007841068448

E-Nr. 941349339

Highlights




Including STEINEL LED system

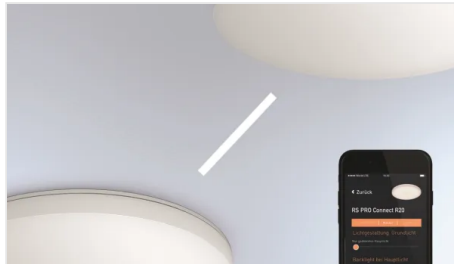

Interconnectable and adjustable via Bluetooth



Impact-resistant material rated to IK07

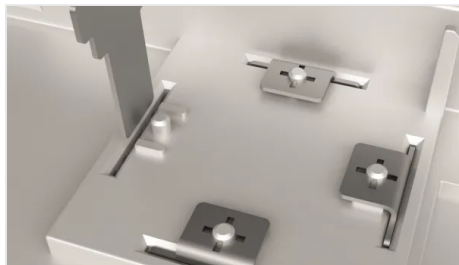

Metal shrouds for defining the direction of sensor detection




Optional basic lighting level 0 - 100 %



Adjustable main light brightness (0 - 100%)



Optional emergency light

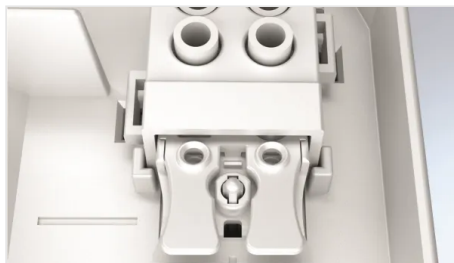

Modern plug-in terminals for straightforward installation

RS PRO R20 basic SC MP5 Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068448
E-Nr. 941349339

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221386	Universal P-Set 3S	Suspension cable
 4007841067335	Relais REL5A-Bluetooth	System components
 4007841067342	Tasterkoppler PC4-Bluetooth	System components
 4007841087234	Adapter R-Serie für Notlichtweiche	Accessory
 4007841064143	Notlicht-Modul R-Serie	Accessory
 4007841084653	Funktaster PB2-Bluetooth	System components
 4007841084660	Funktaster PB4-Bluetooth	System components

ORDERING INFORMATION

Art.-Nr.

068448

EAN

4007841068448

E-Number

941349339

Typ

RS PRO R20 basic SC MP5 Neutral white

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss