

RS PRO P2 flat S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841069742

E-Nr. 941003559

 **steinel**

322 x 68 mm



RS PRO P2 flat S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069742

E-Nr. 941003559

Technical Data

DIMENSIONS		CONNECTIVITY		Base light function time		10/30 min, all night
Dimensions Ø x H		Networking	Yes	Main light adjustable		No
ELECTRICAL		Networking via		Base light function in percent		10 %
Mains connection		Cable		Base light function percent from		10 %
Power		LIGHTING TECHNOLOGY		HOUSING & MATERIAL		
Switching output 1 low-voltage halogen lamps		Measured luminous flux 360°		Impact resistance		IK03
LED lamps > 8 W		Colour temperature		Protection class (IP)		IP54
Capacitive load in µF		With illuminant		Protection class		II
Switching output 1 number of LED/fluorescent lamps		Yes, STEINEL LED system		Ambient temperature		from -10 up to 40 °C
SENSOR TECHNOLOGY		Illuminant		Housing material		Plastic
Max. mounting height		LED cannot be replaced		Cover material		Plastic, opal
Sensor technology		Base		Mounting location		ceiling wall
With motion detector		LED cooling system		Colour		white
Detection angle		without		SCOPE OF DELIVERY & WARRANTY		
Electronic scalability		Soft light start		Manufacturer warranty		5 years
Mechanical scalability		Yes		CERTIFICATES & EPREL		
Radial range		LIFETIME		Certificates		DEKRA
Tangential range		LED lifetime max. °C		EPREL category		Surrounded product with integrated light source
Mounting height		LED lifetime L70B50 25°C				
Optimal mounting height		Luminous flux decline per LM80				
		L80B10				
		SETTINGS				
		Twilight setting				
		2 – 2000 lx				
		Time setting				
		5 s – 15 Min.				
		Base light function				
		Yes				

RS PRO P2 flat S warm white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069742

E-Nr. 941003559

Illustrations

TECHNICAL DRAWINGS

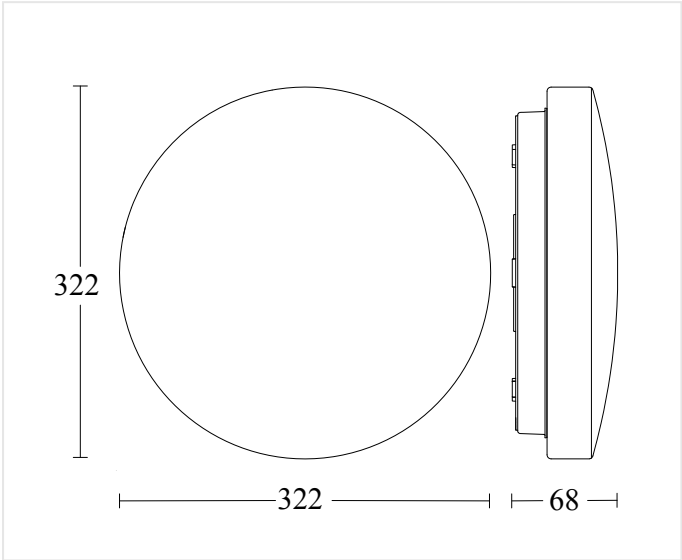

322 x 68 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------

RS PRO P2 flat S warm white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069742

E-Nr. 941003559


Wiring Diagrams

WIRING DIAGRAM 1

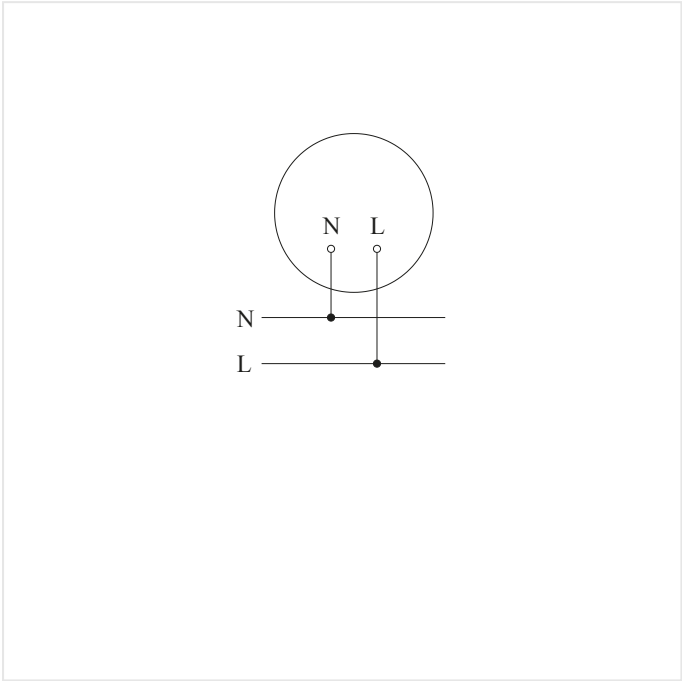

Master circuit diagram

WIRING DIAGRAM 2

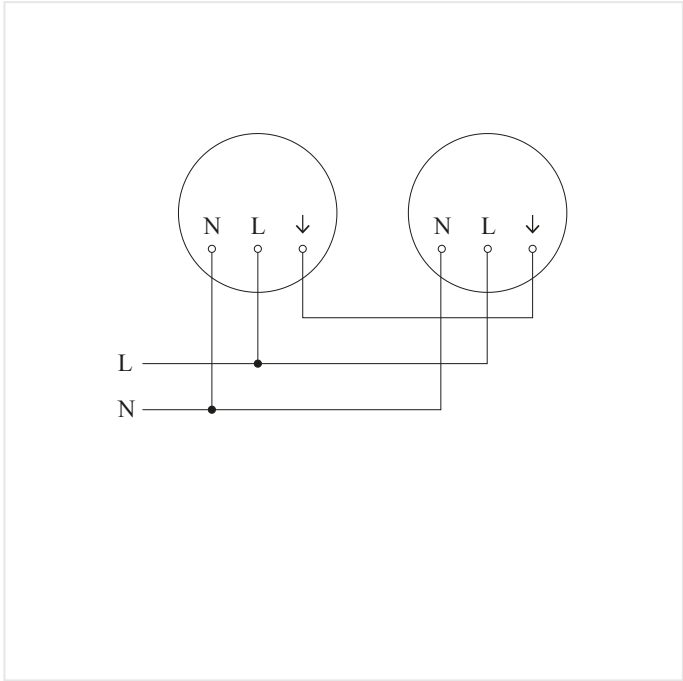

Master/master interconnection circuit diagram

RS PRO P2 flat S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069742

E-Nr. 941003559

Highlights



Including STEINEL LED system



Intelligent soft light start



Interconnectable by cable (maximum of 10 units)



Optional basic lighting level 10 %

RS PRO P2 flat S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069742

E-Nr. 941003559

Accessories

ORDERING INFORMATION	
Art.-Nr.	069742
EAN	4007841069742
E-Number	941003559
Typ	RS PRO P2 flat S warm white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss