HF 3360 COM1 - concealed, rd.

MOTION DETECTOR

EAN 4007841033682
E-Nr. 535940760

- UV-resistant plastic
- Optional remote controls

124 x 64 mm



HF 3360 COM1 - concealed, rd.

MOTION DETECTOR

EAN 4007841033682
E-Nr. 535940760

Technical Data

IDENTIFICATION

Version	Motion detectors

DIMENSIONS

Dimensions Ø × H	124 x 64 mm

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Power	2000 W
Switching output 1 resistive	2000 W
Fluorescent lamps ECG	1500 W
Fluorescent lamps uncompensated	1000 VA
Fluorescent lamps series-compensated	400 VA
Fluorescent lamps parallel-compensated	400 VA
Switching output 1 low-voltage halogen lamps	2000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in µF	176 µF
Switching output 1 number of LED/fluorescent lamps	8 pcs.

SENSOR TECHNOLOGY

Max. mounting height	4,00 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	180 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 8 m (50 m²)
Tangential range	Ø 8 m (50 m²)
Mounting height	2,00 – 4,00 m
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/master
Control technology	On/Off-Leuchte

LIGHTING TECHNOLOGY

Soft light start	No
Continuous light	selectable, 4h
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Base light function	No
Main light adjustable	No
Functions	Normal / test mode\nManual ON / ON-OFF
Settings via	Remote control\nPotentiometers\nSmart Remote
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling corner wall
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors WC / washroom function room / ancillary room multi-storey / underground car park stairwell
Colour	white
RAL colour	9003

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No


HF 3360 COM1 - concealed, rd.

MOTION DETECTOR

EAN **4007841033682**
E-Nr. **535940760**

Illustrations

TECHNICAL DRAWINGS

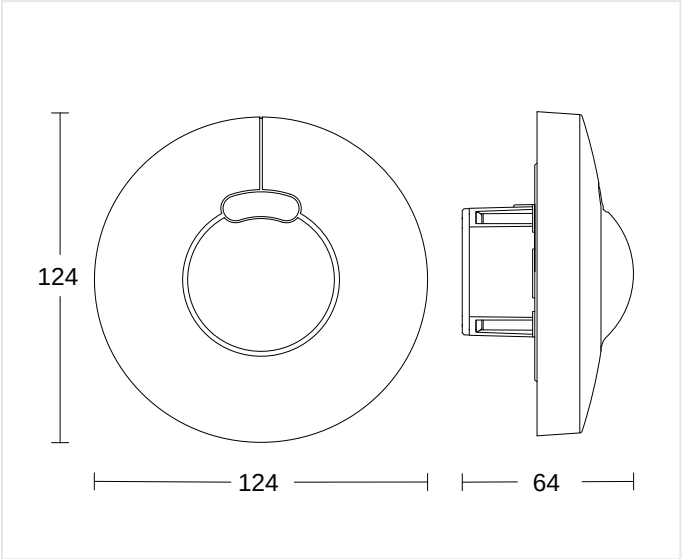

124 x 64 mm

MOUNTING HEIGHT

2,00 – 4,00 m	2,8 m	4,00 m
BEREICH	OPTIMAL	MAX


HF 3360 COM1 - concealed, rd.

MOTION DETECTOR

EAN 4007841033682
E-Nr. 535940760


Wiring Diagrams

WIRING DIAGRAM 1

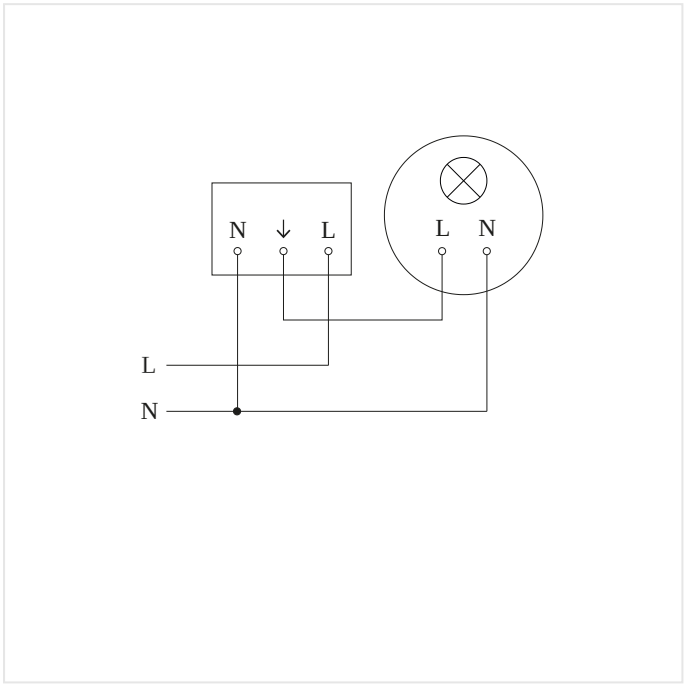

Master circuit diagram

WIRING DIAGRAM 2

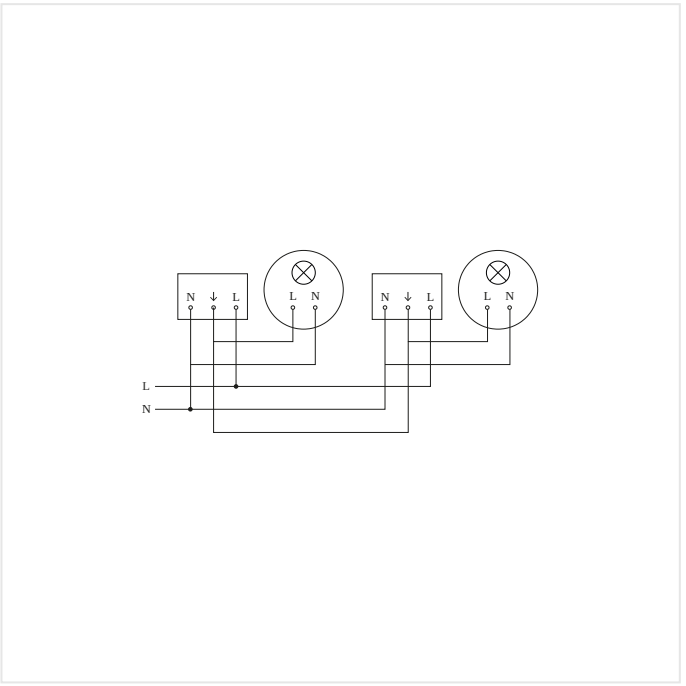

Master/slave interconnection circuit diagram

HF 3360 COM1 - concealed, rd.

MOTION DETECTOR

EAN 4007841033682
E-Nr. 535940760

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841056681	**Schwarze Blende für den HF 3360 Unterputz eckig**	Accessory
	4007841056704	**Schwarze Blende für den HF 3360 Unterputz rund**	Accessory
	4007841009151	**Smart Remote**	Accessory
	4007841559410	**Service Fernbedienung RC8**	Accessory

ORDERING INFORMATION

Art.-Nr.	4007841033682
EAN	4007841033682
E-Number	535940760
Typ	**HF 3360 COM1 - concealed, rd.**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss