

IS 345 KNX - concealed, sq. white

MOTION DETECTOR

neva
lux

EAN 4007841058265

E-Nr. 535941268

● steinel

78 x 94 x 94 mm



IS 345 KNX - concealed, sq. white

MOTION DETECTOR

EAN 4007841058265

E-Nr. 535941268

Technical Data

IDENTIFICATION		Optimal mounting height		2,5 m		Main light adjustable		0 - 100 %		
Version		Motion detectors				Settings via		ETS software Remote control Bus Smart Remote		
DIMENSIONS				CONNECTIVITY						
				Networking		Yes		With remote control		No
Dimensions L x W x H		78 x 94 x 94 mm		Type of networking		Master/slave		Twilight setting teach		Yes
ELECTRICAL				Networking via		KNX bus		HOUSING & MATERIAL		
Supply voltage detail		KNX bus		KNX functions		Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Light output 2x Presence output Day / night function Logic gate		Protection class (IP)		IP20
SENSOR TECHNOLOGY								Ambient temperature		from -20 up to 50 °C
Max. mounting height		5,00 m		With bus coupler		Yes		Mounting location		ceiling
Sensor technology		passive infrared		LIGHTING TECHNOLOGY				Application location		Indoors
Detection angle		360 °		Soft light start		Yes		Mounting type		Concealed wiring
Opening angle		45 °		Continuous light		selectable		Material		Plastic
Sneak-under protection		Yes		Constant light regulation		Yes		Application room		Indoors corridor / aisle multi-storey / underground car park
Segment-by-segment masking		Yes		SETTINGS				Colour		white
Electronic scalability		No		Twilight switch		Yes		RAL colour		9003
Mechanical scalability		No		Twilight setting		2 – 1000 lx		SCOPE OF DELIVERY & WARRANTY		
Radial range		12 x 6 m (72 m²)		Time setting		5 s – 15 Min.		Manufacturer warranty		5 years
Tangential range		23 x 6 m (138 m²)		Base light function		Yes		Corner wall bracket included		No
Switching zones		280 switching zones								
Mounting height		2,50 – 5,00 m								

IS 345 KNX - concealed, sq. white


MOTION DETECTOR

EAN 4007841058265

E-Nr. 535941268

Illustrations

TECHNICAL DRAWINGS

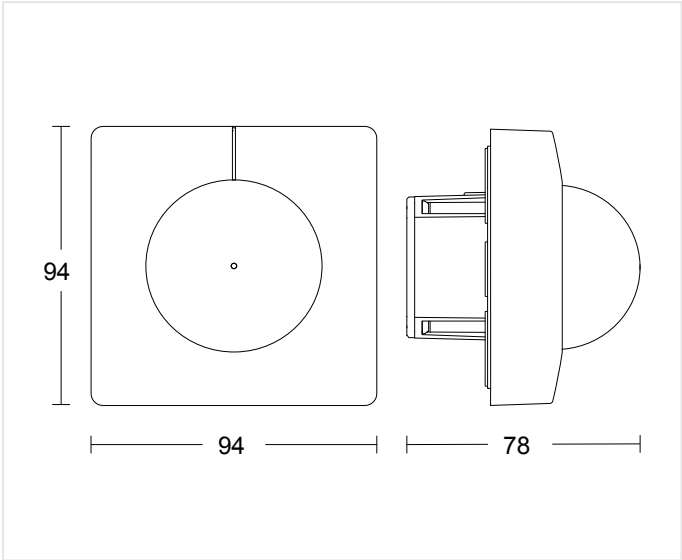

78 x 94 x 94 mm

MOUNTING HEIGHT

2,50 – 5,00 m BEREICH	2,5 m OPTIMAL	5,00 m MAX
--------------------------	------------------	---------------

IS 345 KNX - concealed, sq. white

MOTION DETECTOR

EAN 4007841058265

E-Nr. 535941268

Highlights



UV-resistant plastic



Optional remote controls



Smart Remote remote control optional

IS 345 KNX - concealed, sq. white

MOTION DETECTOR

EAN 4007841058265
E-Nr. 535941268

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

058265

EAN

4007841058265

E-Number

535941268

Typ

IS 345 KNX - concealed, sq. white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss