

RS PRO P1 flat warm white

LED INDOOR LIGHT WITHOUT SENSOR

neva
lux

EAN 4007841069704

E-Nr. 941003289

 **steinel**

272 x 64 mm



RS PRO P1 flat warm white

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069704

E-Nr. 941003289

Technical Data

DIMENSIONS	
Dimensions Ø x H	272 x 64 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Power	8,2 W
SENSOR TECHNOLOGY	
With motion detector	No
CONNECTIVITY	
Networking via	Cable
LIGHTING TECHNOLOGY	
Measured luminous flux 360°	922 lm
Colour temperature	3000 K

With illuminant	Yes, STEINEL LED system
Illuminant	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
LIFETIME	
LED lifetime max. °C	60000 h
LED lifetime L70B50 25°C	> 60000 h
Luminous flux decline per LM80	L80B10
SETTINGS	
Main light adjustable	No
HOUSING & MATERIAL	
Impact resistance	IK03

Protection class (IP)	IP54
Protection class	II
Ambient temperature	from -10 up to 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mounting location	ceiling
Application location	Indoors
Colour	white
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
CERTIFICATES & EPREL	
Certificates	DEKRA
EPREL category	Surrounded product with integrated light source

RS PRO P1 flat warm white


LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069704

E-Nr. 941003289

Illustrations

TECHNICAL DRAWINGS

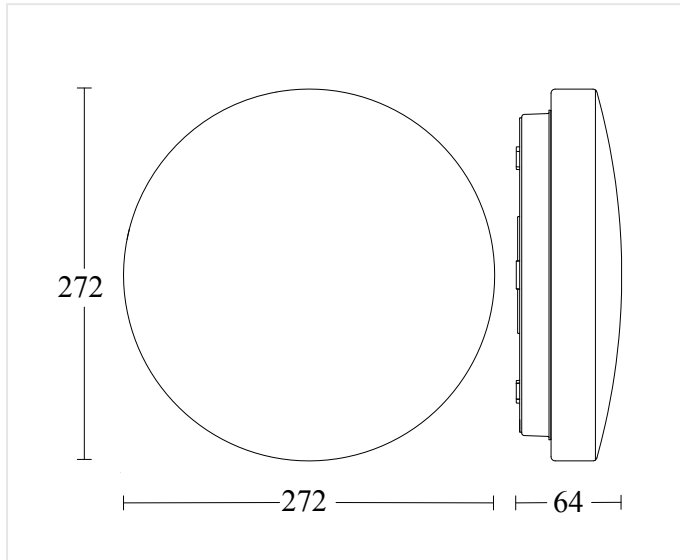

272 x 64 mm

RS PRO P1 flat warm white


LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069704

E-Nr. 941003289


Wiring Diagrams

WIRING DIAGRAM 1

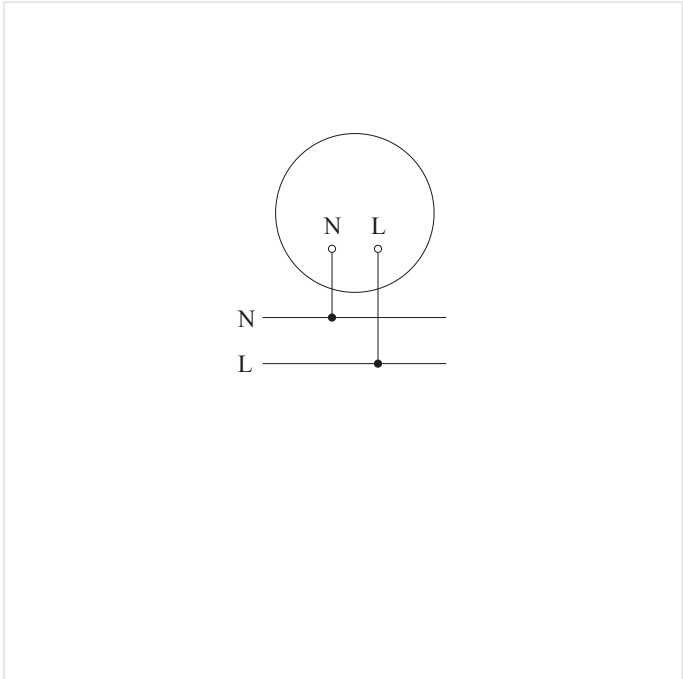

Master circuit diagram

WIRING DIAGRAM 2

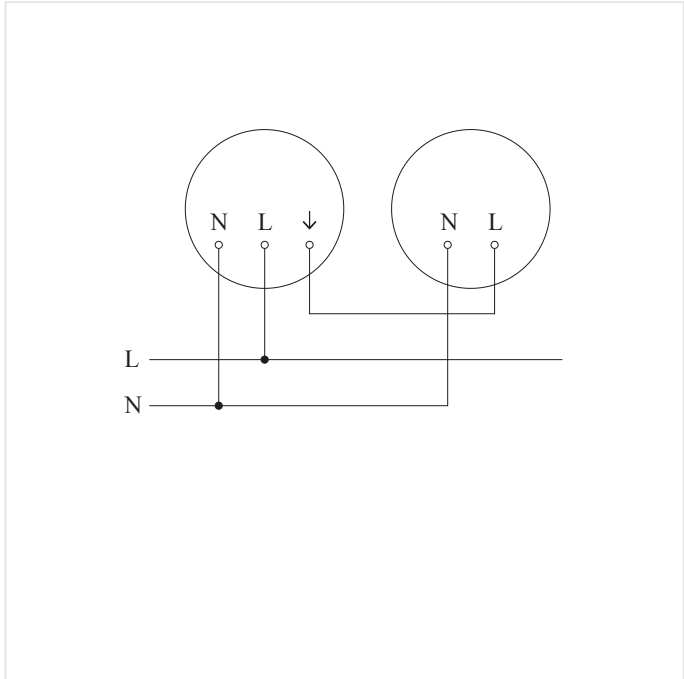

Master/slave interconnection circuit diagram

RS PRO P1 flat warm white

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069704

E-Nr. 941003289

Highlights



Including STEINEL LED system



Intelligent soft light start



Interconnectable by cable (maximum of 10 units)

RS PRO P1 flat warm white

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069704

E-Nr. 941003289

Accessories

ORDERING INFORMATION	
Art.-Nr.	069704
EAN	4007841069704
E-Number	941003289
Typ	RS PRO P1 flat warm white
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	