zola C1200 3CCT

CEILING LUMINAIRE

Product code **221406**

1203 x 71 x 64 mm



zola C1200 3CCT

CEILING LUMINAIRE

Product code **221406**

Technical Data

DIMENSIONS

Dimensions L × W × H	**1203 x 71 x 64 mm**

ELECTRICAL

Mains connection	**200…240 V / 50 – 60 Hz**
Power	**40 W**
Replaceable driver	**Yes**

SENSOR TECHNOLOGY

With motion detector	**No**
With light sensor	**No**

CONNECTIVITY

Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Colour temperature	**3000 / 4000 / 5700 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80-89**
Illuminant	**LED**

SETTINGS

DALI dimming	**No**
With emergency light	**No**
Suitable for light band configuration	**Yes**

HOUSING & MATERIAL

Impact resistance	**IK08**
Protection class (IP)	**IP20**
Protection class	**I**
Ambient temperature	**-20…45 °C**
Housing material	**Stahl**
Cover material	**Diffusor opal**
Mounting type	**Decke / Wand Aufputz**
Colour	**weiss**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 Jahre**

CERTIFICATES & EPREL

EPREL energy efficiency class	**E**


zola C1200 3CCT

CEILING LUMINAIRE

Product code **221406**

Illustrations

TECHNICAL DRAWINGS

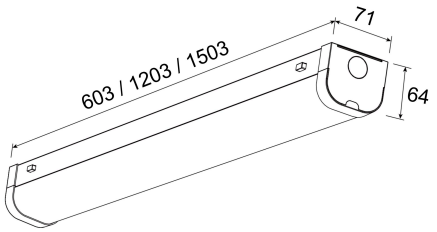

1203 x 71 x 64 mm


zola C1200 3CCT

CEILING LUMINAIRE

Product code **221406**

Wiring Diagrams

WIRING DIAGRAM 1

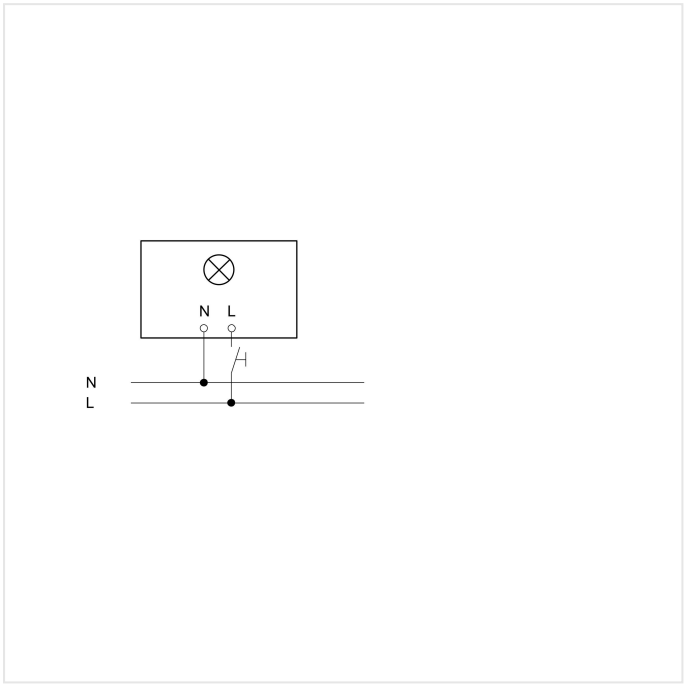

Wiring diagram

zola C1200 3CCT

CEILING LUMINAIRE

Product code **221406**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	221410	**zola P-Set**	Suspending accessories

ORDERING INFORMATION

Art.-Nr.	221406
Typ	**zola C1200 3CCT**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss