

XLED slim S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841012052

- Spotlight with motion detector for targeted illumination of small areas
- Elegant slim design with sensor in housing colour
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 160 ° Infrared sensor with up to 8 m detection of movement
- Incl. cover sticker for exact adjustment of the detection range
- Warm white light (3000 K) and long-life 7,2 W LEDs with 648 lm, with an illumination of max. 100 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

● steinel

201 x 66 x 241 mm



XLED slim S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841012052

Technical Data

DIMENSIONS	
Dimensions L x W x H	201 x 66 x 241 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Power	7,2 W
SENSOR TECHNOLOGY	
Max. mounting height	4,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	r = 4 m (22 m²)
Tangential range	r = 8 m (89 m²)
Mounting height	1,80 – 4,00 m
Optimal mounting height	2,2 m
CONNECTIVITY	
Networking	No
LIGHTING TECHNOLOGY	
Measured luminous flux 360°	648 lm
Colour temperature	3000 K
LED colour deviation	SDCM3
Colour rendering index	80-89
With illuminant	Yes, STEINEL LED system
Illuminant	LED cannot be replaced
Base	without
LED cooling system	Active and Passive Thermo Control
Soft light start	No
LIFETIME	
LED lifetime max. °C	50000 h
LED lifetime L70B50 25°C	> 60000 h
Luminous flux decline per LM80	L70B10
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	2 s – 70 Min.
Base light function	No
Main light adjustable	No
Settings via	Potentiometers
HOUSING & MATERIAL	
Impact resistance	IK03
Protection class (IP)	IP44
Protection class	I
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	Plastic, transparent
Cover material (scope of delivery)	sticker
Mounting location	wall
Application location	Outdoors
Mounting type	Surface wiring
Application room	all round the building outdoors terrace / balcony
Colour	Anthracite
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	3 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
EPREL energy efficiency class	F
EPREL category	Light source


XLED slim S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841012052

Illustrations

TECHNICAL DRAWINGS

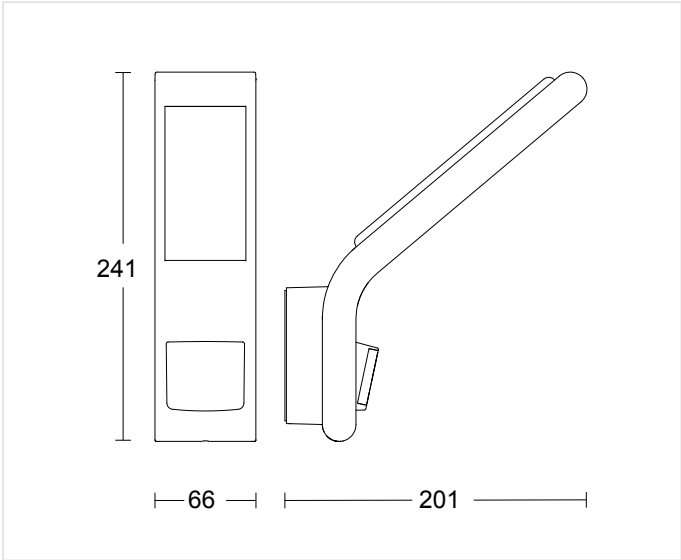

201 x 66 x 241 mm

MOUNTING HEIGHT

1,80 – 4,00 m BEREICH	2,2 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


XLED slim S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841012052

Wiring Diagrams

WIRING DIAGRAM 1

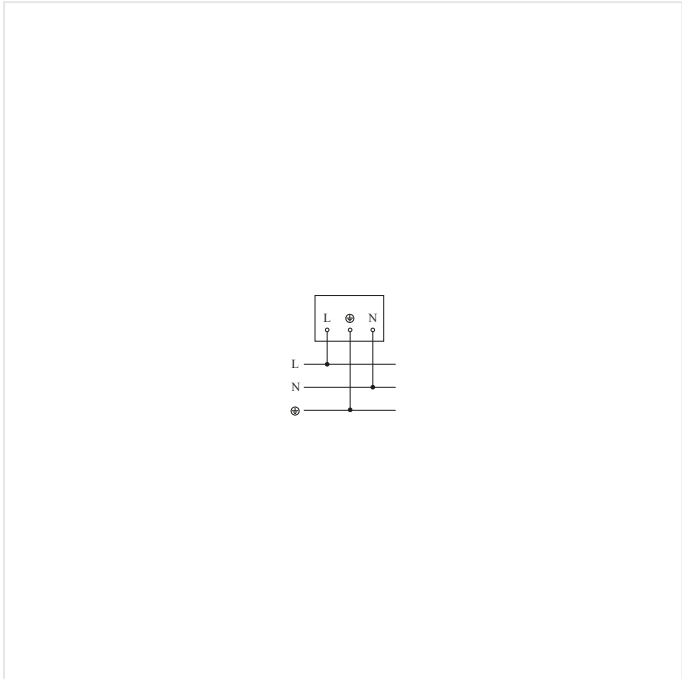

Circuit diagram

XLED slim S Anthracite


EAN 4007841012052

SENSOR-SWITCHED LED FLOODLIGHT

Highlights




Including STEINEL LED system

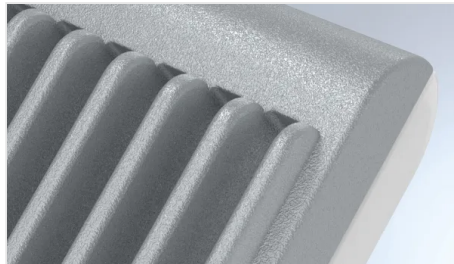

Intelligent LED cooling system



UV-resistant plastic

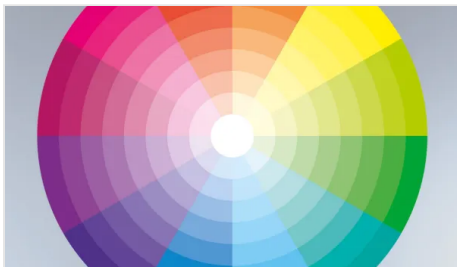

Colour rendering index $R_a \geq 80$

XLED slim S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841012052

Accessories

ORDERING INFORMATION	
Art.-Nr.	012052
EAN	4007841012052
Typ	XLED slim S Anthracite
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	