

NightmatIQ Plus white

PHOTOELECTRIC LIGHTING CONTROLLER

neva
lux

EAN 4007841066123

- Photo-cell controller for automatic night-time illumination of house fronts, gardens, shop windows and other areas
- Straight, flat design made of UV-resistant material
- Wireless networking via Bluetooth and easy setting via STEINEL Connect App
- Thanks to the brightness sensor, the light comes on automatically at dusk - and goes off again at dawn
- Functions: Individual time settings via timer, night-economy mode, teach function
- The twilight value can be individually adjusted from 1 - 1000 lux ambient brightness via the app
- Incl. mounting accessories - plastic-free packaging

● steinel

38 x 95 x 95 mm



NightmatIQ Plus white

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066123

Technical Data

IDENTIFICATION		CONNECTIVITY		Twilight setting teach		Yes
Version	Photo-cell controller	Networking	Yes	HOUSING & MATERIAL		
DIMENSIONS		Type of networking	Master/master Master/slave	Protection class (IP)	IP54	
Dimensions L × W × H	38 x 95 x 95 mm	Networking via	Bluetooth Mesh	Ambient temperature	from -20 up to 40 °C	
ELECTRICAL		LIGHTING TECHNOLOGY		Housing material	Plastic	
Mains connection	220 – 240 V / 50 – 60 Hz	Continuous light	selectable	Mounting location	wall	
Switching output 1 resistive	1000 W	Constant light regulation	No	Application location	Outdoors	
Fluorescent lamps ECG	250 W	SETTINGS		Mounting type	Surface wiring	
Own consumption	0,5 W	Twilight switch	Yes	Material	Plastic	
SENSOR TECHNOLOGY		Twilight setting	1 – 1000 lx	Application room	Indoors all round the building courtyard & driveway front door outdoors terrace / balcony	
Sensor technology	Photo-cell controller	Base light function	No	Colour	white	
With motion detector	No	Functions	light ON / OFF in the morning Night economy mode Timer	SCOPE OF DELIVERY & WARRANTY		
		Settings via	Bluetooth Mesh App Smartphone	Manufacturer warranty	3 years	
		With remote control	No			


NightmatIQ Plus white

EAN 4007841066123

PHOTOELECTRIC LIGHTING CONTROLLER

Illustrations

TECHNICAL DRAWINGS

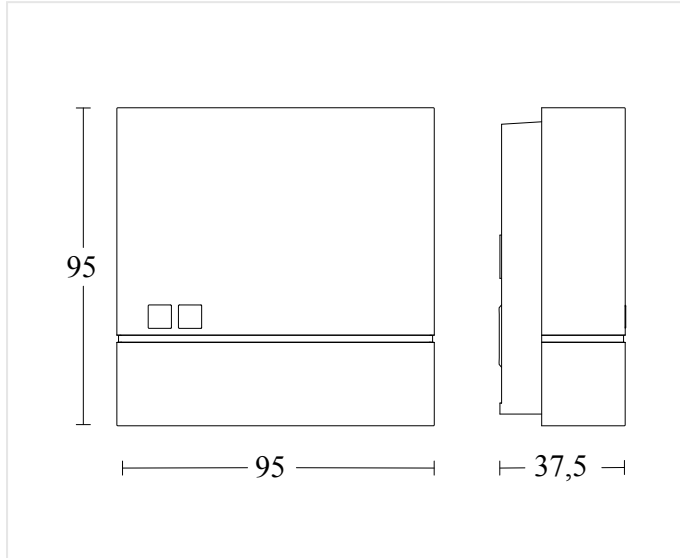

38 x 95 x 95 mm


NightmatIQ Plus white

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066123

Wiring Diagrams

WIRING DIAGRAM 1

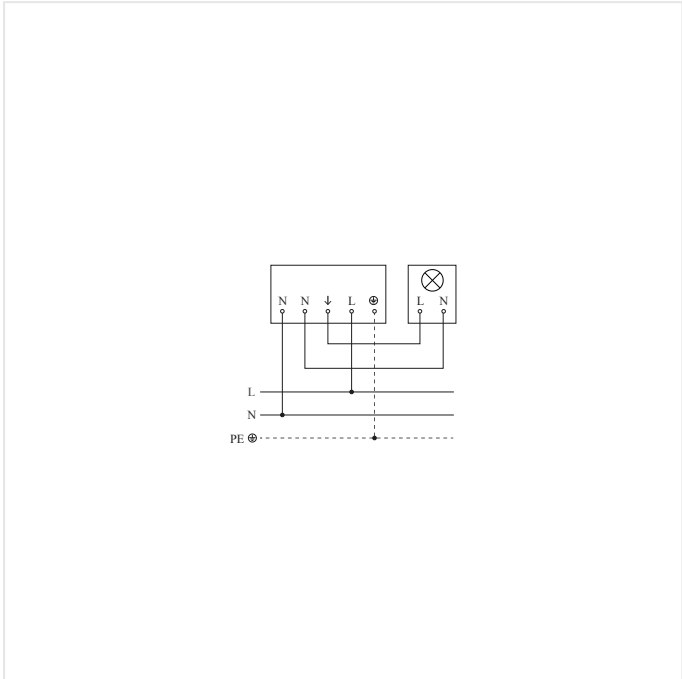

Circuit diagram

NightmatIQ Plus white

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066123

Highlights



UV resistant material



Interconnectable and adjustable via
Bluetooth

NightmatIQ Plus white

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066123

Accessories

ORDERING INFORMATION	
Art.-Nr.	066123
EAN	4007841066123
Typ	NightmatIQ Plus white
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	