

PD IR 4360-8 COM1 - concealed white

neva
lux**MOTION AND PRESENCE DETECTOR**

EAN 4007841085124

E-Nr. 535900027

- Our series for the common ranges
- Presence detector with 8 m motion detection and 6 m presence detection for switching light
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Key input and parallel switching of multiple sensors to expand the detection range
- External approval and measurement in accordance with sensNORM

 **steinel**

109 x 69 mm



PD IR 4360-8 COM1 - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841085124
E-Nr. 535900027

Technical Data

IDENTIFICATION			
Version	Motion and Presence Detector		
DIMENSIONS			
Dimensions Ø x H	109 x 69 mm		
ELECTRICAL			
Mains connection	50 – 60 Hz		
Switching output 1 resistive	2000 W		
LED lamps > 8 W	500 W		
Capacitive load in µF	176 µF		
Switching output 1 number of LED/fluorescent lamps	50 pcs.		
SENSOR TECHNOLOGY			
Max. mounting height	4,00 m		
Sensor technology	passive infrared		
With motion detector	Yes		
Detection angle	360 °		
Sneak-under protection	Yes		
Segment-by-segment masking	Yes		
Electronic scalability	No		
Mechanical scalability	No		
Radial range	Ø 4.5 m (16 m²)		
		Tangential range	Ø 8 m (50 m²)
		Switching zones	492 switching zones
		Mounting height	2 – 4 m
		Presence range	Ø 6 m (28 m²)
		Optimal mounting height	2,8 m
		CONNECTIVITY	
		Networking	Yes
		Type of networking	Master/master
		Networking via	Cable
		Networking quantity	max. 10 sensors
		LIGHTING TECHNOLOGY	
		Soft light start	Yes
		Constant light regulation	No
		SETTINGS	
		Twilight switch	Yes
		Twilight setting	2 – 1000 lx
		Time setting	5 s – 60 Min.
		Main light adjustable	No
		Functions	Motions sensor Light sensor Presence function Presence detector logic Semi-/fully automatic Potentiometer Relay output Normal / test mode
		Settings via	Remote control Smart Remote Potentiometers
		With remote control	No
		Twilight setting teach	Yes
		HOUSING & MATERIAL	
		Protection class (IP)	IP20
		Ambient temperature	from -20 up to 50 °C
		Housing material	Plastic
		Cover material	Other
		Cover material (scope of delivery)	shrouds
		Mounting location	ceiling
		Application location	Indoors
		Mounting type	Concealed wiring
		Material	Plastic
		Application room	Indoors function room / ancillary room one-person office warehouse
		Colour	white
		RAL colour	9010
		SCOPE OF DELIVERY & WARRANTY	
		Manufacturer warranty	5 years
		Corner wall bracket included	No

PD IR 4360-8 COM1 - concealed white


MOTION AND PRESENCE DETECTOR

EAN 4007841085124

E-Nr. 535900027

Illustrations

TECHNICAL DRAWINGS

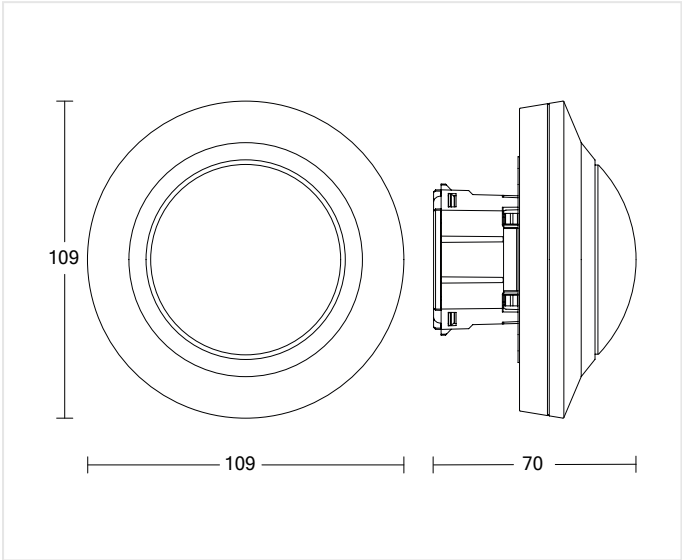

109 x 69 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------

PD IR 4360-8 COM1 - concealed white


MOTION AND PRESENCE DETECTOR

EAN 4007841085124

E-Nr. 535900027


Wiring Diagrams

WIRING DIAGRAM 1

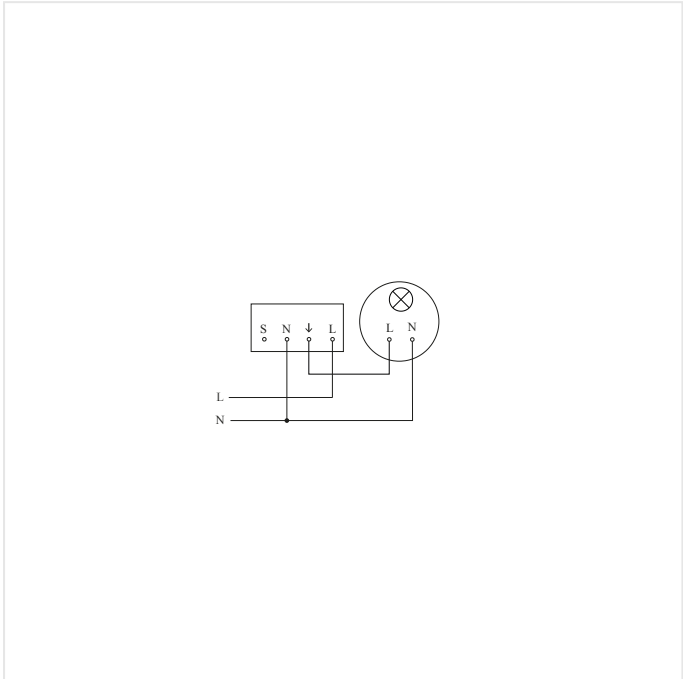

Circuit diagram

WIRING DIAGRAM 2

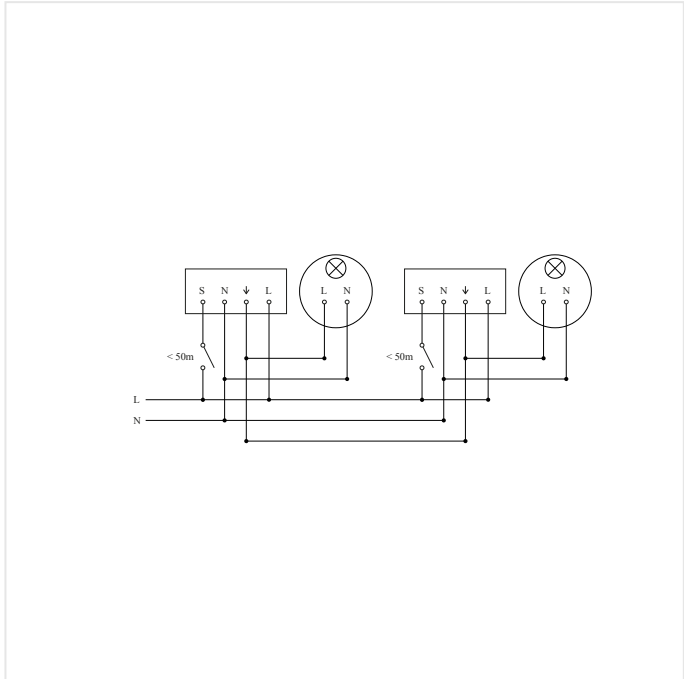

Circuit diagram for interconnecting max. 10 sensors

PD IR 4360-8 COM1 - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841085124
E-Nr. 535900027

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

085124

EAN

4007841085124

E-Number

535900027

Typ

PD IR 4360-8 COM1 - concealed white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss