RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841078775
E-Nr. 941012789

- Indoor light without motion detector, with high-quality anthracite-coloured aluminium housing
- With pleasant ambient light for a beautiful room atmosphere, suitable for ceiling and wall mounting
- Wireless networking via Bluetooth and easy setting via STEINEL Connect App
- Functions: adjustable main light
- Warm white light (3000 K) and long-life 17,1 W LEDs with 1165 lm
- Incl. mounting accessories - plastic-free packaging

263 x 53 mm



RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN **4007841078775**
E-Nr. **941012789**

Technical Data

DIMENSIONS

Dimensions Ø × H	**263 x 53 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**17,1 W**
Own consumption	**0,5 W**

SENSOR TECHNOLOGY

Max. mounting height	**4,00 m**
Transmission power	**< 1 mW**
HF technology	**5,8 GHz**
With motion detector	**No**
Mounting height	**2,00 – 4 m**
Optimal mounting height	**2,8 m**

CONNECTIVITY

Networking	**Yes**
Type of networking	**Master/master**
Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**1165 lm**
Colour temperature	**3000 K**
LED colour deviation	**SDCM3**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
LED cooling system	**Passive Thermo Control**
Soft light start	**Yes**
Efficiency without cover	**68 lm/W**

LIFETIME

LED lifetime L70B50 25°C	**> 36000 h**

SETTINGS

Base light function	**Yes**
Base light function detail	**LED effect light**
Base light function time	**1-60 min**
Settings via	**Bluetooth Smartphone Tablet**
With remote control	**No**
Base light function in percent	**10 – 100 %**
Base light function percent from	**10 %**

HOUSING & MATERIAL

Impact resistance	**IK10**
Protection class (IP)	**IP54**
Protection class	**I**
Ambient temperature	**from -20 up to 40 °C**
Housing material	**Aluminium**
Cover material	**Plastic, opal**
Mounting location	**ceiling wall**
Application location	**Indoors**
Mounting type	**Surface wiring**
Material	**Aluminium**
Application room	**Indoors corridor / aisle function room / ancillary room recreation room stairwell**
Colour	**Anthracite**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**3 years**

CERTIFICATES & EPREL

EPREL category	**Surrounded product with integrated light source**


RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN **4007841078775**
E-Nr. **941012789**

Illustrations

TECHNICAL DRAWINGS

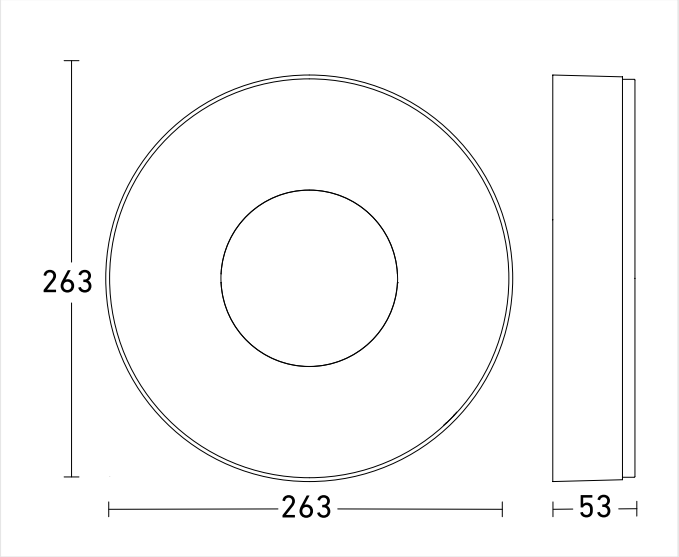

263 x 53 mm

MOUNTING HEIGHT

2,00 – 4 m	2,8 m	4,00 m
BEREICH	OPTIMAL	MAX


RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN **4007841078775**
E-Nr. **941012789**

Wiring Diagrams

WIRING DIAGRAM 1

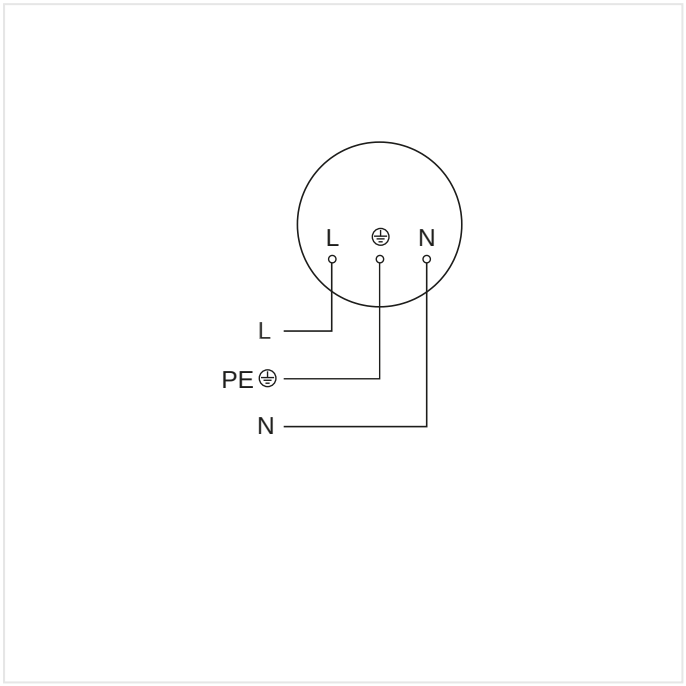

Slave/wireless master interconnection circuit diagram

RS 200 C without motion detector, with Bluetooth


LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841078775
E-Nr. 941012789

Highlights



Interconnectable and adjustable via Bluetooth

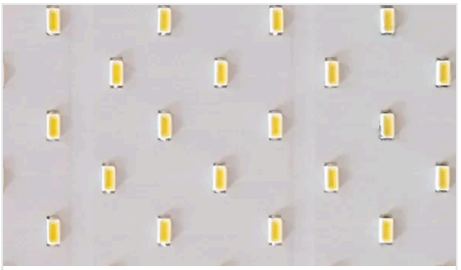

Including STEINEL LED system

Intelligent soft light start (only with bluetooth sensor product)




High-quality aluminium

RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841078775
E-Nr. 941012789

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841088620	**Funkschalter TapDuo C**	System components

ORDERING INFORMATION

Art.-Nr.	078775
EAN	4007841078775
E-Number	941012789
Typ	**RS 200 C without motion detector, with Bluetooth**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss