

RS PRO S30 SC PMMA Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841068042

E-Nr. 941004049

 **steinel**

350 x 83 mm



RS PRO S30 SC PMMA Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068042

E-Nr. 941004049

Technical Data

DIMENSIONS	
Dimensions Ø x H	350 x 83 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Power	25,8 W
Own consumption	0,39 W
SENSOR TECHNOLOGY	
Max. mounting height	4,00 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	5,8 GHz
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	160 °
Segment-by-segment masking	Yes
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 10 m (79 m²)
Tangential range	Ø 10 m (79 m²)
Mounting height	2,00 – 4,00 m
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Type of networking	Master/master
Networking via	Bluetooth Mesh
Slave mode adjustable	Yes
LIGHTING TECHNOLOGY	
Measured luminous flux 360°	2747 lm

Colour temperature	4000 K
LED colour deviation	SDCM3
With illuminant	Yes, STEINEL LED system
Illuminant	LED cannot be replaced
Base	Other
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable, 4h
LIFETIME	
LED lifetime max. °C	55000 h
Luminous flux decline per LM80	L80B50
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 30 Min.
Base light function	Yes
Base light function detail	LED effect light
Base light function time	10-30 min, all day all night
Main light adjustable	5 - 100 %
Functions	Neighbouring group function Presence function Group parameterisation Manual ON / ON-OFF Connection to central battery systems Motions sensor DIM function Adjustable fade time when switching on and off Free selection of the light value in a luminaire group Normal / test mode Orientation light Presence detector logic Encrypted communication Constant-lighting control ON-OFF Master/slave override Data monitoring
Settings via	Bluetooth

With remote control	No
Twilight setting teach	Yes
Base light function in percent	10 – 50 %
Base light function percent from	10 %
HOUSING & MATERIAL	
Impact resistance	IK07
Protection class (IP)	IP20
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mounting location	ceiling wall
Application location	Indoors
Mounting type	Surface wiring
Material	Aluminium
Application room	Indoors WC / washroom changing room corridor / aisle function room / ancillary room kitchenette outdoors stairwell
Colour	Silver
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
House number sheet included	No
CERTIFICATES & EPREL	
EPREL category	Surrounded product with integrated light source

RS PRO S30 SC PMMA Neutral white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068042

E-Nr. 941004049

Illustrations

TECHNICAL DRAWINGS

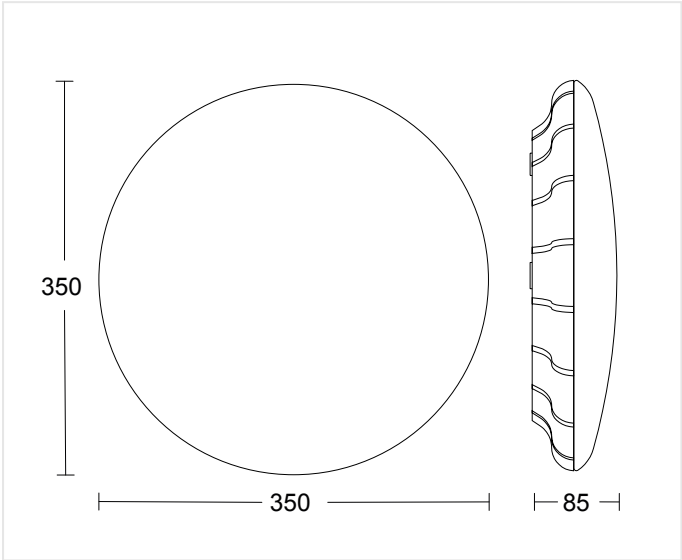

350 x 83 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------

RS PRO S30 SC PMMA Neutral white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068042

E-Nr. 941004049


Wiring Diagrams

WIRING DIAGRAM 1

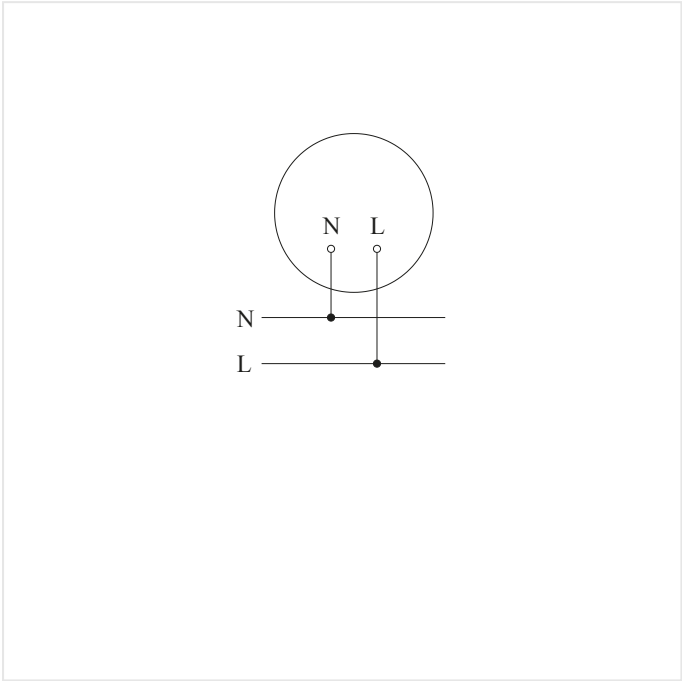

Slave/wireless master interconnection circuit diagram

WIRING DIAGRAM 2

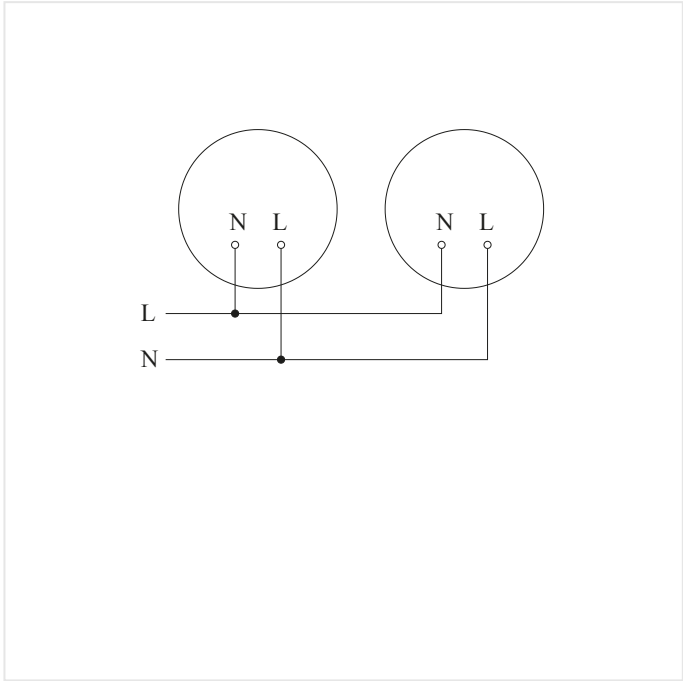

Master/master interconnection circuit diagram


RS PRO S30 SC PMMA Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068042

E-Nr. 941004049

Highlights

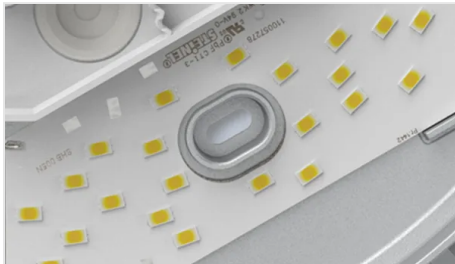

Including STEINEL LED system



Intelligent LED cooling system




Optional basic lighting level 10 %



Optional basic lighting level 10 - 20%



Wireless interconnection

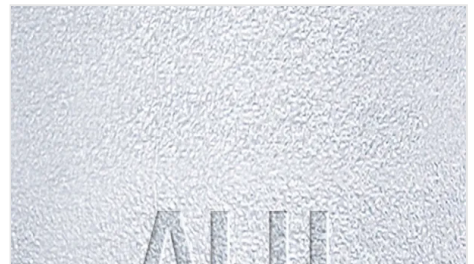

High-quality aluminium

RS PRO S30 SC PMMA Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841068042

E-Nr. 941004049

Accessories

ORDERING INFORMATION	
Art.-Nr.	068042
EAN	4007841068042
E-Number	941004049
Typ	RS PRO S30 SC PMMA Neutral white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss