

IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR

neva
lux

EAN 4007841010560

E-Nr. 535942906

● steinel

65 x 95 x 95 mm



IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR

EAN 4007841010560
E-Nr. 535942906

Technical Data


IDENTIFICATION			Optimal mounting height			Base light function in percent			10 – 50 %		
Version			Motion and Presence Detector			Base light function percent from			10 %		
DIMENSIONS			CONNECTIVITY			HOUSING & MATERIAL					
Dimensions L x W x H			Networking			Protection class (IP)			IP54		
65 x 95 x 95 mm			Type of networking			Ambient temperature			from -20 up to 50 °C		
ELECTRICAL			Networking via			Mounting location			ceiling		
Mains connection			Cable			Application location			Indoors Outdoors		
220 – 240 V / 50 – 60 Hz			LIGHTING TECHNOLOGY			Mounting type			Surface wiring		
Control output DALI			Soft light start			Material			Plastic		
Broadcast 1x30 electronic ballasts			Continuous light			Application room			Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park outdoors production facilities reception / lobby recreation room sports hall stairwell warehouse		
SENSOR TECHNOLOGY			Constant light regulation			Colour			white		
Max. mounting height			SETTINGS			RAL colour			9003		
4,00 m			Twilight switch			SCOPE OF DELIVERY & WARRANTY					
Sensor technology			Twilight setting			Manufacturer warranty			5 years		
passive infrared			Time setting			Corner wall bracket included			No		
Detection angle			Base light function			CERTIFICATES & EPREL					
360 °			Base light function time			Certificates			DALI-2		
Opening angle			Main light adjustable								
180 °			Functions								
Sneak-under protection			Normal / test mode Manual ON / ON-OFF Constant-lighting control ON-OFF								
Yes			Settings via								
Segment-by-segment masking			Remote control Potentiometers Smart Remote								
Yes			With remote control								
Electronic scalability			No								
Mechanical scalability			Twilight setting teach								
No											
Radial range											
Ø 8 m (50 m²)											
Tangential range											
Ø 40 m (1257 m²)											
Switching zones											
1416 switching zones											
Mounting height											
2,50 – 4,00 m											
Presence range											
Ø 3 m (7 m²)											

IS 3360 DALI-2 APC - surface, sq.
PRESENCE DETECTOR

EAN 4007841010560
E-Nr. 535942906

Illustrations

TECHNICAL DRAWINGS

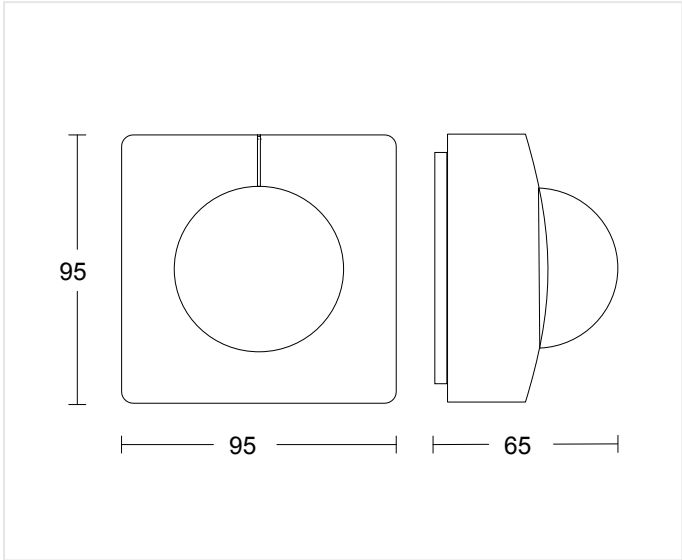

65 x 95 x 95 mm

MOUNTING HEIGHT


2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

IS 3360 DALI-2 APC - surface, sq.
PRESENCE DETECTOR

EAN 4007841010560
E-Nr. 535942906


Wiring Diagrams

WIRING DIAGRAM 1

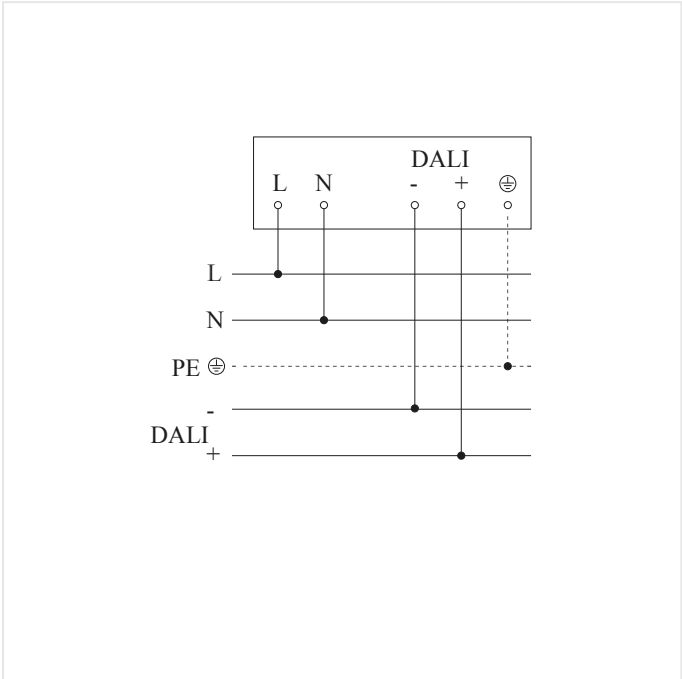

Master circuit diagram

WIRING DIAGRAM 2

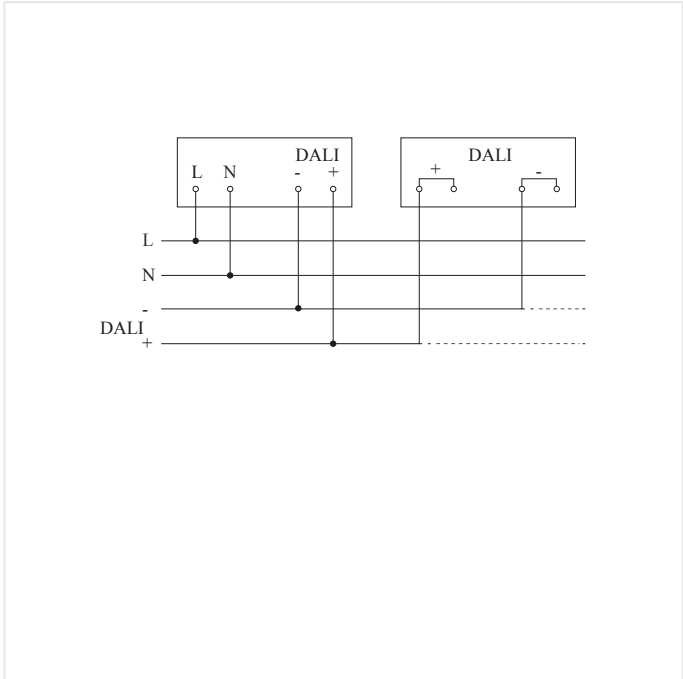

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR


EAN 4007841010560

E-Nr. 535942906

Highlights



UV-resistant plastic

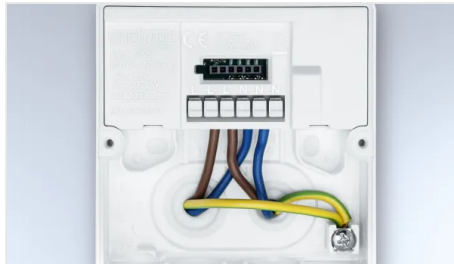

Large terminal compartment



Optional remote controls

IS 3360 DALI-2 APC - surface, sq.
PRESENCE DETECTOR

EAN 4007841010560
E-Nr. 535942906

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory

ORDERING INFORMATION

Art.-Nr.

010560

EAN

4007841010560

E-Number

535942906

Typ

IS 3360 DALI-2 APC - surface, sq.

neva
lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss