

HF 360 DALI-2 APC - concealed

PRESENCE DETECTOR

neva
lux

EAN 4007841002817

E-Nr. 535934504

● steinel

56 x 120 x 120 mm



HF 360 DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841002817

E-Nr. 535934504

Technical Data

IDENTIFICATION

Version	Presence detector
1.0	...
1.1	...
1.2	...
1.3	...
1.4	...
1.5	...
1.6	...
1.7	...
1.8	...
1.9	...
1.10	...
1.11	...
1.12	...
1.13	...
1.14	...
1.15	...
1.16	...
1.17	...
1.18	...
1.19	...
1.20	...
1.21	...
1.22	...
1.23	...
1.24	...
1.25	...
1.26	...
1.27	...
1.28	...
1.29	...
1.30	...
1.31	...
1.32	...
1.33	...
1.34	...
1.35	...
1.36	...
1.37	...
1.38	...
1.39	...
1.40	...
1.41	...
1.42	...
1.43	...
1.44	...
1.45	...
1.46	...
1.47	...
1.48	...
1.49	...
1.50	...
1.51	...
1.52	...
1.53	...
1.54	...
1.55	...
1.56	...
1.57	...
1.58	...
1.59	...
1.60	...
1.61	...
1.62	...
1.63	...
1.64	...
1.65	...
1.66	...
1.67	...
1.68	...
1.69	...
1.70	...
1.71	...
1.72	...
1.73	...
1.74	...
1.75	...
1.76	...
1.77	...
1.78	...
1.79	...
1.80	...
1.81	...
1.82	...
1.83	...
1.84	...
1.85	...
1.86	...
1.87	...
1.88	...
1.89	...
1.90	...
1.91	...
1.92	...
1.93	...
1.94	...
1.95	...
1.96	...
1.97	...
1.98	...
1.99	...
2.00	...
2.01	...
2.02	...
2.03	...
2.04	...
2.05	...
2.06	...
2.07	...
2.08	...
2.09	...
2.10	...
2.11	...
2.12	...
2.13	...
2.14	...
2.15	...
2.16	...
2.17	...
2.18	...
2.19	...
2.20	...
2.21	...
2.22	...
2.23	...
2.24	...
2.25	...
2.26	...
2.27	...
2.28	...
2.29	...
2.30	...
2.31	...
2.32	...
2.33	...
2.34	...
2.35	...
2.36	...
2.37	...
2.38	...
2.39	...
2.40	...
2.41	...
2.42	...
2.43	...
2.44	...
2.45	...
2.46	...
2.47	...
2.48	...
2.49	...
2.50	...
2.51	...
2.52	...
2.53	...
2.54	...
2.55	...
2.56	...
2.57	...
2.58	...
2.59	...
2.60	...
2.61	...
2.62	...
2.63	...
2.64	...
2.65	...
2.66	...
2.67	...
2.68	...
2.69	...
2.70	...
2.71	...
2.72	...
2.73	...
2.74	...
2.75	...
2.76	...

DIMENSIONS

Dimensions L x W x H **56 x 120 x 120 mm**

ELECTRICAL

Mains connection	230 V / 50 – 60 Hz
Control output DALI	Broadcast 2x12 electronic ballasts

SENSOR TECHNOLOGY

Max. mounting height	3,50 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	140 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	Yes
Mechanical scalability	No
Range detail	1 or 2 detection directions can be masked out by stickers for adjustment to the room situation.

Radial range	Ø 12 m (113 m²)
Tangential range	Ø 12 m (113 m²)
Mounting height	2,50 – 3,50 m
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/slave
Networking via	Cable
With bus coupler	Yes

LIGHTING TECHNOLOGY

Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes

SETTINGS

Twilight switch	Yes
Twilight setting	10 – 1000 lx
Time setting	30 s – 30 Min.
Base light function	Yes
Base light function time	1-60 min, all night
Main light adjustable	50 - 100 %
Functions	Normal / test mode Semi-/fully automatic Pushbutton / switch mode Manual ON / ON-OFF Constant-lighting control ON-OFF

Settings via	Remote control DIP switches
	Potentiometers Smart Remote
With remote control	No
Twilight setting teach	Yes
Base light function in percent	10 – 60 %
Base light function percent from	10 %

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	from -25 up to 55 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors WC / washroom function room / ancillary room kitchenette stairwell
Colour	white
RAL colour	9010

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

CERTIFICATES & EPREL

Certificates DALI-2


HF 360 DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841002817
E-Nr. 535934504

Illustrations

TECHNICAL DRAWINGS

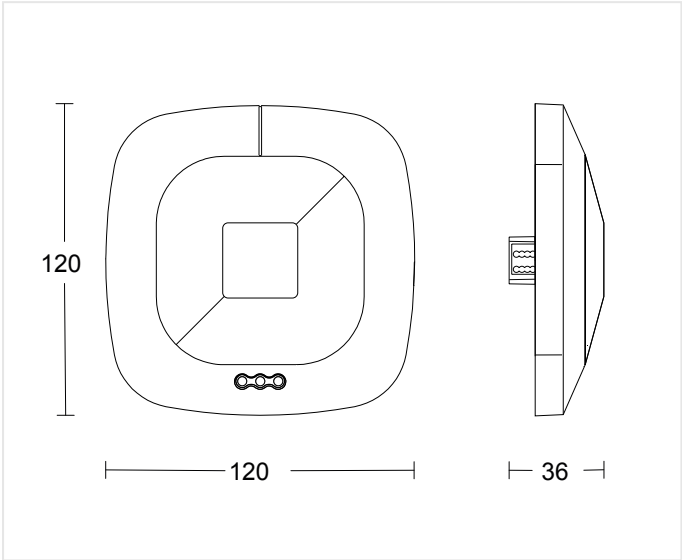

56 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 3,50 m BEREICH	2,8 m OPTIMAL	3,50 m MAX
--------------------------	------------------	---------------


HF 360 DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841002817
E-Nr. 535934504


Wiring Diagrams

WIRING DIAGRAM 1

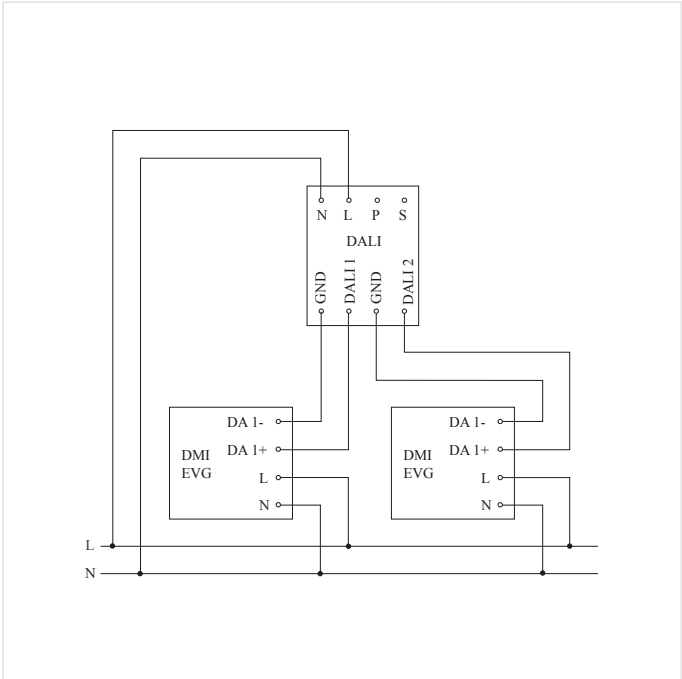

Master circuit diagram

WIRING DIAGRAM 2

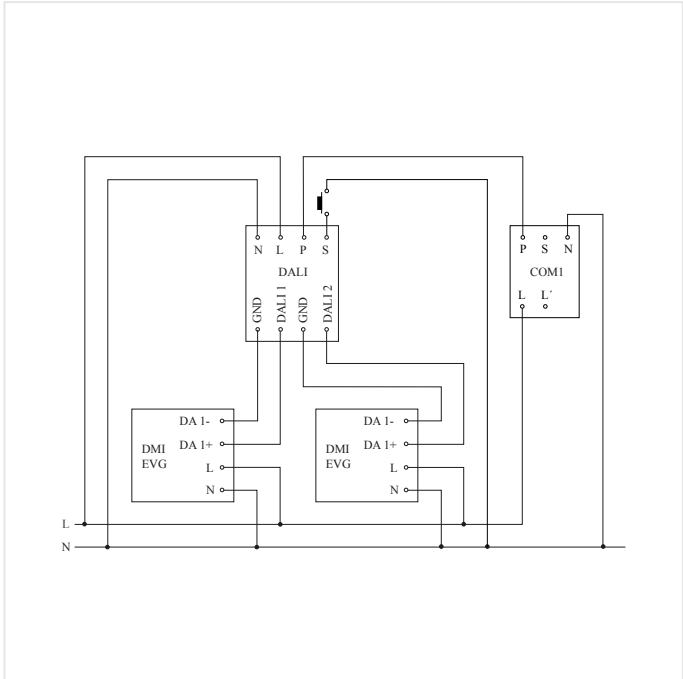

Master/master interconnection circuit diagram

HF 360 DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841002817

E-Nr. 535934504


Highlights



Optional remote control



Optional surface-mounting adapter

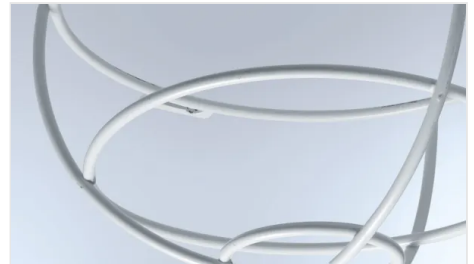

Optional guard cage



HF ceiling adapter for installation in
suspended ceilings

HF 360 DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841002817
E-Nr. 535934504

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841006600	HF-Deckenadapter	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841009151	Smart Remote	Accessory
 4007841000363	Aufputz-Adapter Control Pro IP54 weiss	Accessory
 4007841003036	Control PRO Schutzkorb	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

002817

EAN

4007841002817

E-Number

535934504

Typ

HF 360 DALI-2 APC - concealed

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss