IR Quattro HD 24m DALI plus In-ceiling installation

PRESENCE DETECTOR

EAN 4007841035204
E-Nr. 535933406

steinel

120 x 120 x 119 mm



IR Quattro HD 24m DALI plus In-ceiling installation

PRESENCE DETECTOR

EAN 4007841035204
E-Nr. 535933406

Technical Data

IDENTIFICATION

Version	Presence detector

DIMENSIONS

Dimensions L × W × H	120 x 120 x 119 mm

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Own consumption	0,5 W
Control output DALI	Broadcast 64 electronic ballasts / Addressable

SENSOR TECHNOLOGY

Max. mounting height	10,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	No
Mechanical scalability	Yes
Radial range	8 x 8 m (64 m²)
Tangential range	20 x 20 m (400 m²)
Switching zones	4800 switching zones
Mounting height	2,50 – 10,00 m
Presence range	8 x 8 m (64 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/master Master/slave
Networking via	DALI 2

LIGHTING TECHNOLOGY

Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes

SETTINGS

Twilight switch	Yes
Twilight setting	10 – 1000 lx
Time setting	5 s – 60 Min.
Base light function	Yes
Base light function time	1-60 min, all night
Main light adjustable	50 - 100 %
Functions	4 inputs for conventional switches Semi-/fully automatic Constant-lighting control ON-OFF Master/slave override Neighbouring group function Normal / test mode TouchDIM function
Settings via	Remote control Smart Remote
With remote control	No
Twilight setting teach	Yes
Base light function in percent	10 – 60 %
Base light function percent from	10 %

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	from 0 up to 40 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	In-ceiling installation
Material	Plastic
Application room	Indoors changing room classroom conference room / meeting room duty room high-bay warehouse lecture hall multi-storey / underground car park open-plan office production facilities reception / lobby recreation room sports hall
Colour	white
RAL colour	9010

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

CERTIFICATES & EPREL

Certificates	VDE DALI-2


IR Quattro HD 24m DALI plus In-ceiling installation

PRESENCE DETECTOR

EAN **4007841035204**
E-Nr. **535933406**

Illustrations

TECHNICAL DRAWINGS

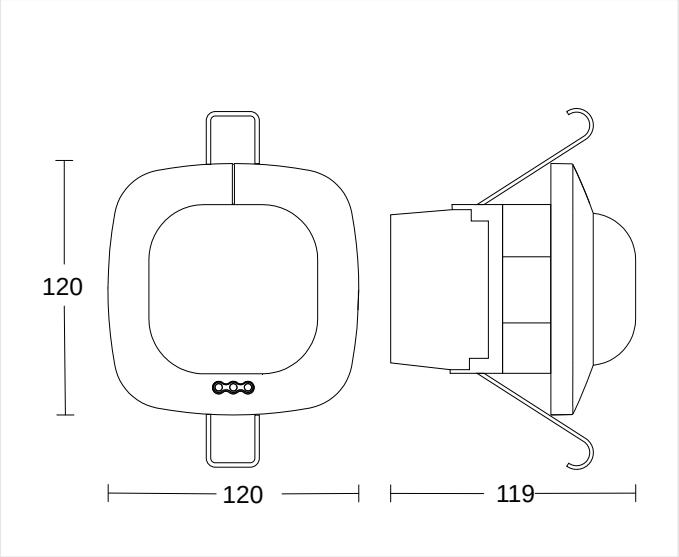

120 x 120 x 119 mm

MOUNTING HEIGHT

2,50 – 10,00 m	2,8 m	10,00 m
BEREICH	OPTIMAL	MAX


IR Quattro HD 24m DALI plus In-ceiling installation

PRESENCE DETECTOR

EAN 4007841035204
E-Nr. 535933406


Wiring Diagrams

WIRING DIAGRAM 1

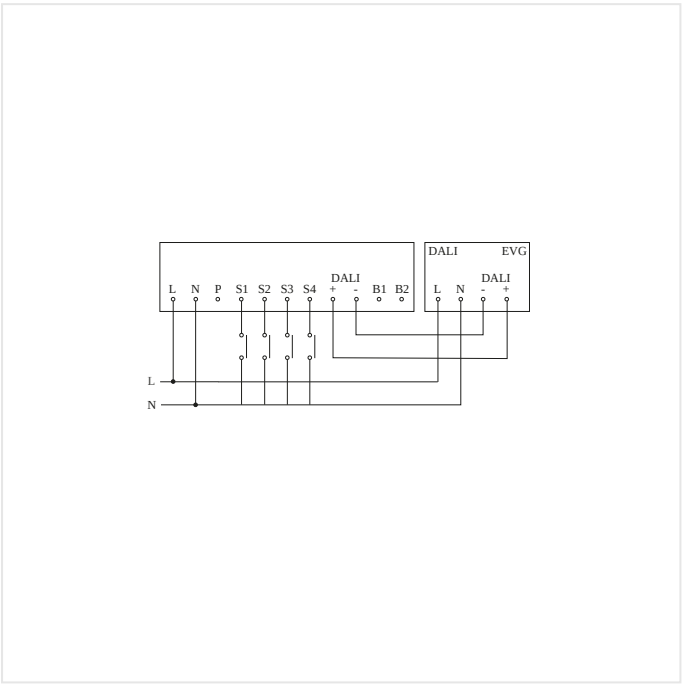

Master circuit diagram

WIRING DIAGRAM 2

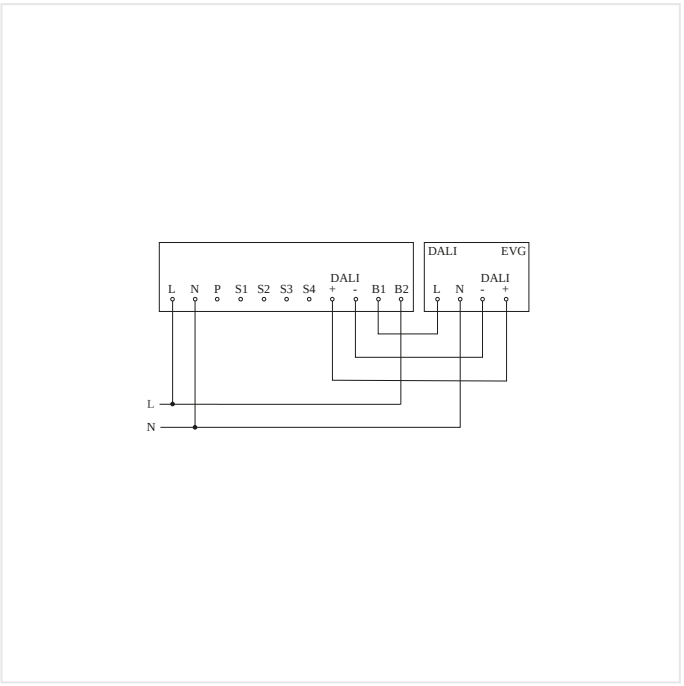

Master circuit diagram with electronic ballast OFF

IR Quattro HD 24m DALI plus In-ceiling installation

PRESENCE DETECTOR

EAN 4007841035204
E-Nr. 535933406

Highlights



4 pyros with DSP (Digital Signal Processing)



Smart Remote remote control optional

IR Quattro HD 24m DALI plus In-ceiling installation

PRESENCE DETECTOR

EAN **4007841035204**
E-Nr. **535933406**

Accessories

ORDERING INFORMATION

Art.-Nr.	035204
EAN	4007841035204
E-Number	535933406
Typ	**IR Quattro HD 24m DALI plus In-ceiling installation**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss