

RS PRO T32 Neutral white

LED INDOOR LIGHT WITHOUT SENSOR

neva
lux

EAN 4007841092580

 **steinel**

322 x 68 mm



RS PRO T32 Neutral white

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841092580

Technical Data

DIMENSIONS		With illuminant		Yes, STEINEL LED system		Protection class (IP)		IP54			
Dimensions Ø × H		322 x 68 mm		Illuminant		LED cannot be replaced		Protection class		II	
ELECTRICAL				Base		without		Ambient temperature		from -10 up to 40 °C	
Mains connection		220 – 240 V / 50 – 60 Hz		LED cooling system		Passive Thermo Control		Housing material		Plastic	
Power		14,1 W		Soft light start		No		Cover material		Plastic, opal	
SENSOR TECHNOLOGY				LIFETIME				Mounting location		ceiling wall	
With motion detector		No		LED lifetime max. °C		50000 h		Colour		white	
CONNECTIVITY				LED lifetime L70B50 25°C		> 60000 h		SCOPE OF DELIVERY & WARRANTY			
Networking via		Cable		Luminous flux decline per LM80		L80B10		Manufacturer warranty		5 years	
LIGHTING TECHNOLOGY				SETTINGS				CERTIFICATES & EPREL			
Measured luminous flux 360°		1684 lm		Main light adjustable		No		Certificates		DEKRA	
Colour temperature		4000 K		HOUSING & MATERIAL				EPREL category		Surrounded product with integrated light source	
				Impact resistance		IK03					


RS PRO T32 Neutral white

EAN 4007841092580

LED INDOOR LIGHT WITHOUT SENSOR

Illustrations

TECHNICAL DRAWINGS

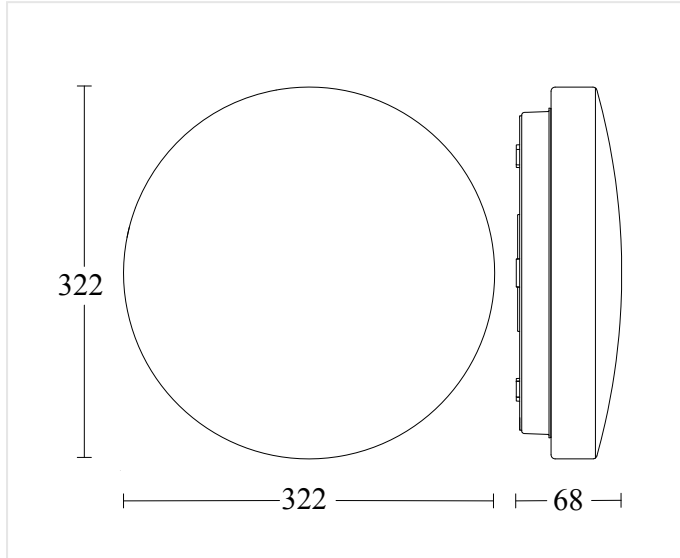

322 x 68 mm


RS PRO T32 Neutral white

EAN 4007841092580

LED INDOOR LIGHT WITHOUT SENSOR


Wiring Diagrams

WIRING DIAGRAM 1

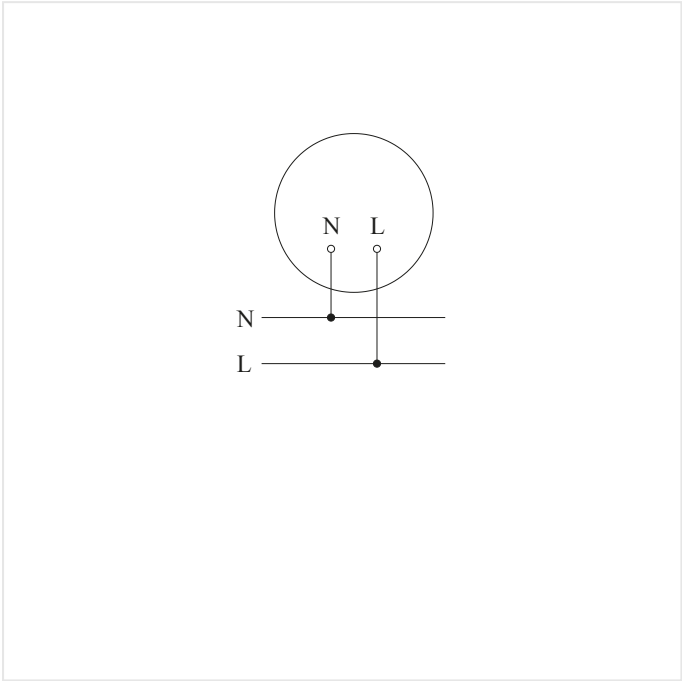

Master circuit diagram

WIRING DIAGRAM 2

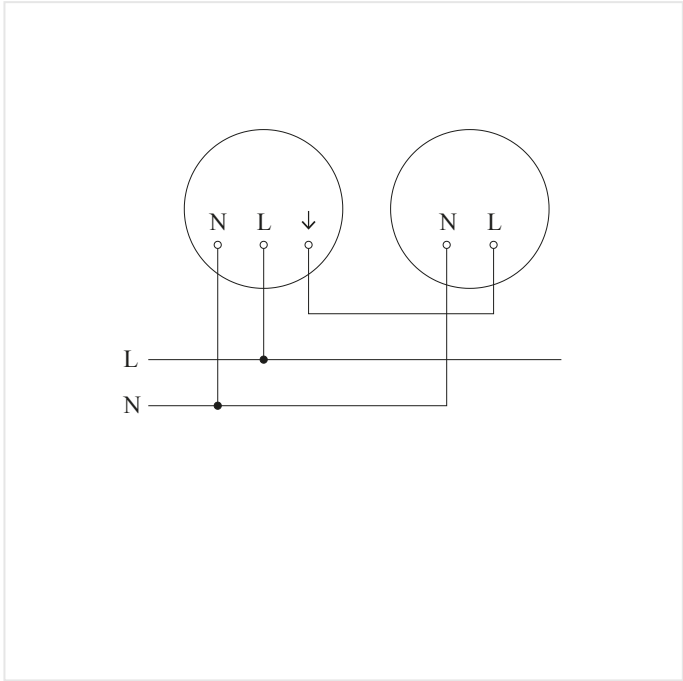

Master/slave interconnection circuit diagram

RS PRO T32 Neutral white


EAN 4007841092580

LED INDOOR LIGHT WITHOUT SENSOR

Highlights



Including STEINEL LED system

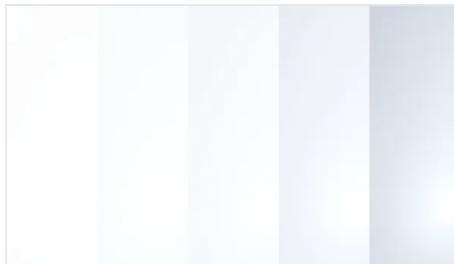

Intelligent soft light start



Interconnectable by cable (maximum of 10 units)

RS PRO T32 Neutral white

EAN 4007841092580

LED INDOOR LIGHT WITHOUT SENSOR

Accessories

ORDERING INFORMATION

Art.-Nr. 092580

EAN 4007841092580

Typ RS PRO T32 Neutral white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss