

RS PRO S30 Q SC warm white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841067526

E-Nr. 941326939

 **steinel**

331 x 331 x 56 mm



RS PRO S30 Q SC warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841067526

E-Nr. 941326939

Technical Data

DIMENSIONS

Dimensions L x W x H331 x 331 x 56 mm

ELECTRICAL

Mains connection220 – 240 V / 50 – 60 Hz

Power26 W

Own consumption0,39 W

SENSOR TECHNOLOGY

Max. mounting height4,00 m

Sensor technologyHigh frequency

Transmission power< 1 mW

With motion detectorYes

Detectionalso through glass, wood and stud walls

Detection angle360 °

Opening angle160 °

Segment-by-segment maskingYes

Electronic scalabilityYes

Mechanical scalabilityNo

Radial rangeØ 10 m (79 m²)

Tangential rangeØ 10 m (79 m²)

Mounting height2,00 – 4,00 m

Optimal mounting height2,8 m

CONNECTIVITY

NetworkingYes

Type of networkingMaster/master

Networking viaBluetooth Mesh

Slave mode adjustableYes

LIGHTING TECHNOLOGY

Measured luminous flux2801 lm

Colour temperature3000 K

LED colour deviationSDCM3

With illuminantYes, STEINEL LED system

IlluminantLED cannot be replaced

Basewithout

LED cooling systemPassive Thermo Control

Soft light startYes

Continuous lightselectable

LIFETIME

LED lifetime max. °C50000 h

Luminous flux decline per LM80L80B50

SETTINGS

Twilight switchYes

Twilight setting2 – 2000 lx

Time setting5 s – 60 Min.

Base light functionYes

Base light function detailLED effect light

Base light function time1-60 min

Main light adjustableYes

FunctionsGroup parameterisation
Manual ON / ON-OFF
Neighbouring group function
Presence function Motions sensor
Connection to central battery systems DIM function
Adjustable fade time when switching on and off
Light sensor Normal / test mode
Orientation light
Presence detector logic
Encrypted communication

Settings viaBluetooth

With remote controlNo

Twilight setting teachYes

Base light function in percent7 – 100 %

Base light function percent from7 %

HOUSING & MATERIAL

Impact resistanceIK03

Protection class (IP)IP20

Protection classII

Ambient temperaturefrom -20 up to 40 °C

Housing materialAluminium

Cover materialPlastic, opal

Mounting locationceiling wall

Application locationIndoors

Mounting typeSurface wiring

Application roomIndoors WC / washroom
changing room corridor / aisle
function room / ancillary room
kitchenette outdoors stairwell

ColourSilver

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty5 years

House number sheet includedNo

CERTIFICATES & EPREL

EPREL categorySurrounded product with integrated light source

RS PRO S30 Q SC warm white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841067526

E-Nr. 941326939

Illustrations

TECHNICAL DRAWINGS

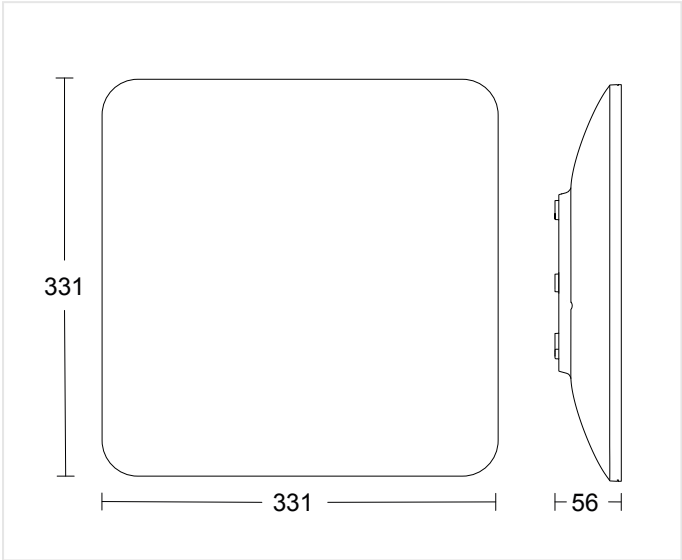

331 x 331 x 56 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------

RS PRO S30 Q SC warm white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841067526

E-Nr. 941326939


Wiring Diagrams

WIRING DIAGRAM 1

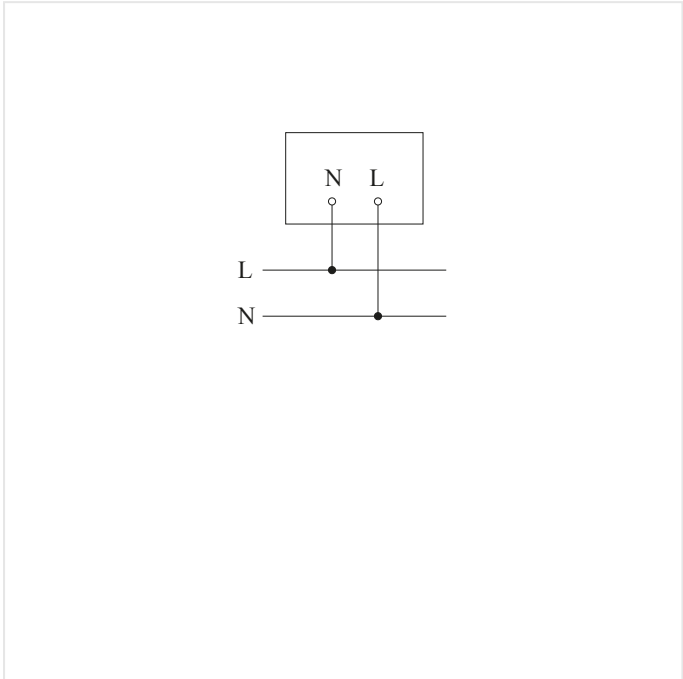

Slave/wireless master interconnection circuit diagram

WIRING DIAGRAM 2

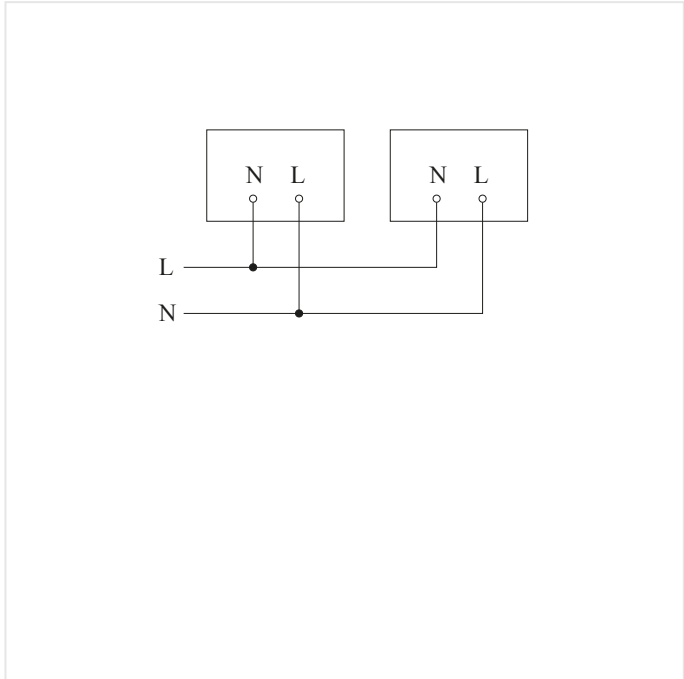

Master/master interconnection circuit diagram

RS PRO S30 Q SC warm white

SENSOR-SWITCHED LED INDOOR LIGHT


EAN 4007841067526

E-Nr. 941326939

Highlights




Including STEINEL LED system

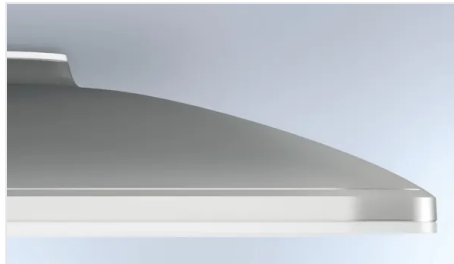

Intelligent LED cooling system



Optional basic lighting level 10 - 50 %

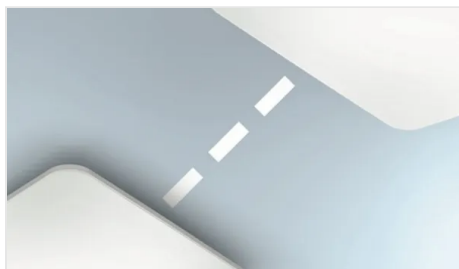

Interconnectable and adjustable via
Bluetooth



High-quality aluminium



Optional remote control RC10

RS PRO S30 Q SC warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841067526

E-Nr. 941326939

Accessories

ORDERING INFORMATION	
Art.-Nr.	067526
EAN	4007841067526
E-Number	941326939
Typ	RS PRO S30 Q SC warm white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss