# XLED ONE XL white

**LED FLOODLIGHT WITHOUT SENSOR**

EAN 4007841065232
E-Nr. 941501399

- Spotlight without motion detector for wall and ceiling mounting with floodlight-like illumination of large areas
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours / day)
- LED panel can be swivelled vertically by 180°
- Warm white light (3000 K) and long-life 42,6 W LEDs with 4200 lm, with an illumination of max. 300 sqm
- Incl. mounting accessories - plastic-free packaging

steinel

193 x 259 x 215 mm



# XLED ONE XL white

**LED FLOODLIGHT WITHOUT SENSOR**

EAN **4007841065232**
E-Nr. **941501399**

## Technical Data

### DIMENSIONS

| | |
|---|---|
| Dimensions L × W × H | **193 x 259 x 215 mm** |

### ELECTRICAL

| | |
|---|---|
| Mains connection | **220 – 240 V / 50 – 60 Hz** |
| Power | **42,6 W** |

### SENSOR TECHNOLOGY

| | |
|---|---|
| With motion detector | **No** |

### CONNECTIVITY

| | |
|---|---|
| Networking | **No** |

### LIGHTING TECHNOLOGY

| | |
|---|---|
| Measured luminous flux 360° | **4200 lm** |
| Colour temperature | **3000 K** |
| LED colour deviation | **SDCM3** |
| Colour rendering index | **80-89** |
| With illuminant | **Yes, STEINEL LED system** |
| Illuminant | **LED cannot be replaced** |
| Base | **without** |
| LED cooling system | **Passive Thermo Control** |

### LIFETIME

| | |
|---|---|
| LED lifetime max. °C | **50000 h** |
| LED lifetime L70B50 25°C | **> 36000 h** |
| Luminous flux decline per LM80 | **L70B10** |

### SETTINGS

| | |
|---|---|
| Twilight switch | **No** |
| Base light function | **No** |

### HOUSING & MATERIAL

| | |
|---|---|
| Impact resistance | **IK03** |
| Protection class (IP) | **IP44** |
| Protection class | **I** |
| Ambient temperature | **from -20 up to 40 °C** |
| Housing material | **Aluminium** |
| Cover material | **Glass transparent** |
| Mounting location | **ceiling wall** |
| Application location | **Outdoors** |
| Mounting type | **Surface wiring** |
| Application room | **courtyard & driveway outdoors** |
| Colour | **white** |

### SCOPE OF DELIVERY & WARRANTY

| | |
|---|---|
| Manufacturer warranty | **3 years** |

### CERTIFICATES & EPREL

| | |
|---|---|
| EPREL energy efficiency class | **E** |
| EPREL category | **Surrounded product with integrated light source** |


# XLED ONE XL white

**LED FLOODLIGHT WITHOUT SENSOR**

EAN **4007841065232**
E-Nr. **941501399**

## Illustrations

### TECHNICAL DRAWINGS

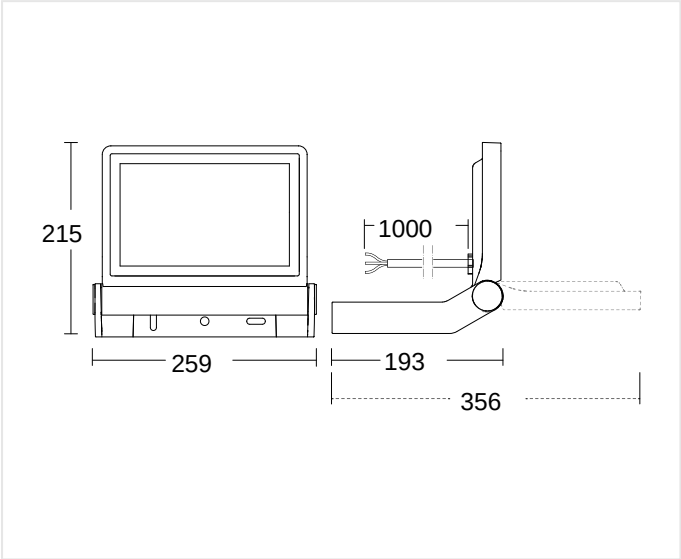


193 x 259 x 215 mm


# XLED ONE XL white

**LED FLOODLIGHT WITHOUT SENSOR**

EAN **4007841065232**
E-Nr. **941501399**

## Wiring Diagrams

### WIRING DIAGRAM 1

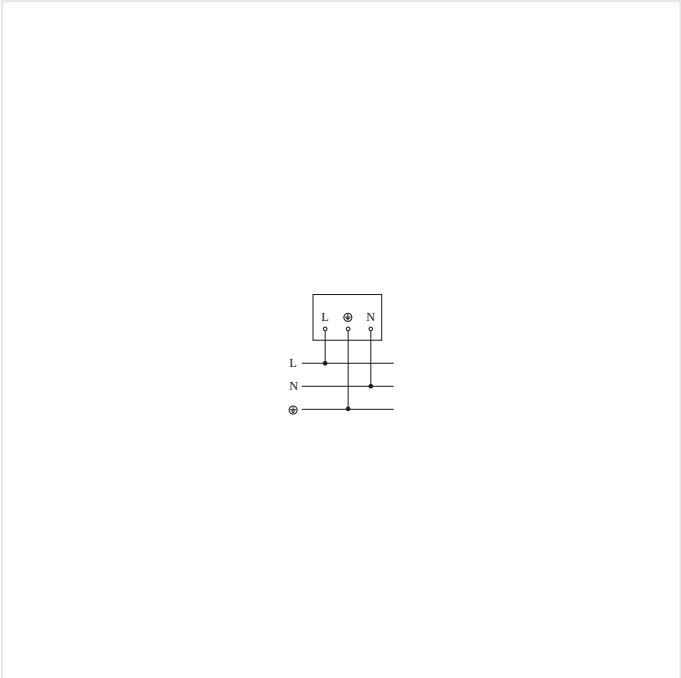



Circuit diagram

# XLED ONE XL white

**LED FLOODLIGHT WITHOUT SENSOR**

EAN **4007841065232**
E-Nr. **941501399**

## Highlights

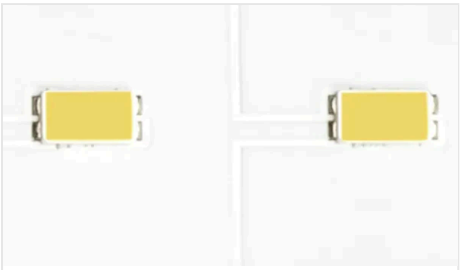

Including STEINEL LED system



UV resistant material



High-quality aluminium



Suitable for mounting on ceilings

# XLED ONE XL white

**LED FLOODLIGHT WITHOUT SENSOR**

EAN **4007841065232**
E-Nr. **941501399**

## Accessories

**ORDERING INFORMATION**

| | |
|---|---|
| Art.-Nr. | 065232 |
| EAN | 4007841065232 |
| E-Number | 941501399 |
| Typ | **XLED ONE XL white** |

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss