

LS 150 S white

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841052553

E-Nr. 924712410

- Spotlight with motion detector with robust aluminium spotlight head and optimum light diffusion thanks to ceramic reflector
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 240 ° Infrared sensor with up to 12 m detection of movement
- Spotlight head can be swivelled horizontally by 80° and vertically by 150°, sensor can be swivelled horizontally by 160°, incl. covers for exact adjustment of the detection area
- Optional corner wall bracket available for reliable and uninterrupted monitoring of an area in front of two house walls
- Neutral white light (4000 K) and long-life 14,7 W LEDs with 1375 lm, with an illumination of max. 150 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

 **steinel**

176 x 155 x 210 mm



LS 150 S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841052553

E-Nr. 924712410

Technical Data

DIMENSIONS	
Dimensions L x W x H	176 x 155 x 210 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Power	14,7 W
SENSOR TECHNOLOGY	
Max. mounting height	4,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	240 °
Opening angle	180 °
Sneak-under protection	Yes
Tangential range	r = 12 m (302 m²)
Mounting height	1,8 – 4 m
Optimal mounting height	2 m
CONNECTIVITY	
Networking	No

LIGHTING TECHNOLOGY	
Measured luminous flux 360°	1486 lm
Colour temperature	4000 K
LED colour deviation	SDCM3
Colour rendering index	80-89
With illuminant	Yes, STEINEL LED system
Illuminant	LED cannot be replaced
Base	without
Soft light start	No
LIFETIME	
LED lifetime max. °C	50000 h
LED lifetime L70B50 25°C	> 36000 h
SETTINGS	
Twilight setting	2 – 1000 lx
Time setting	10 s – 15 Min.
Main light adjustable	No
Settings via	Potentiometers
HOUSING & MATERIAL	
Impact resistance	IK03

Protection class (IP)	IP44
Protection class	I
Ambient temperature	from -10 up to 30 °C
Housing material	Aluminium
Cover material	Glass transparent
Cover material (scope of delivery)	shrouds
Mounting location	corner wall
Application location	Outdoors
Mounting type	Surface wiring
Application room	all round the building courtyard & driveway outdoors
Colour	white
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	3 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
EPREL energy efficiency class	E
EPREL category	Light source

LS 150 S white


SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841052553

E-Nr. 924712410

Illustrations

TECHNICAL DRAWINGS

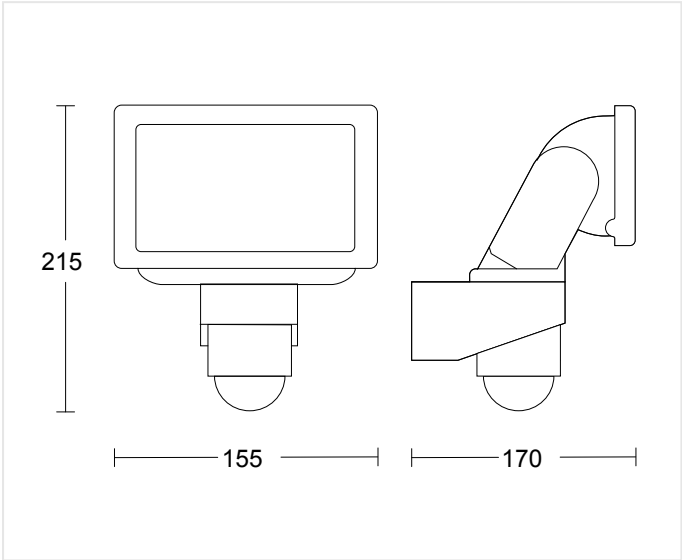

176 x 155 x 210 mm

MOUNTING HEIGHT

1,8 – 4 m BEREICH	2 m OPTIMAL	4,00 m MAX
----------------------	----------------	---------------

LS 150 S white


SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841052553

E-Nr. 924712410

Wiring Diagrams

WIRING DIAGRAM 1

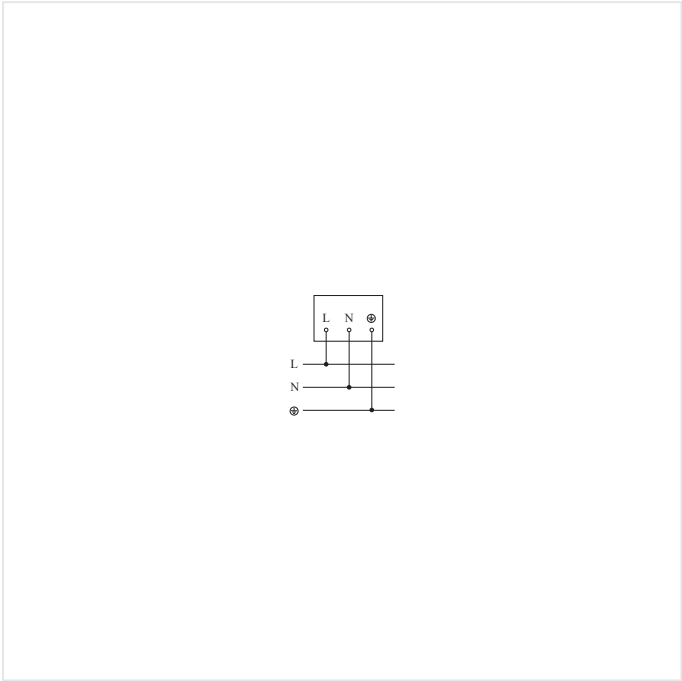

Circuit diagram

LS 150 S white

SENSOR-SWITCHED LED FLOODLIGHT


EAN 4007841052553

E-Nr. 924712410


Highlights



Including STEINEL LED system

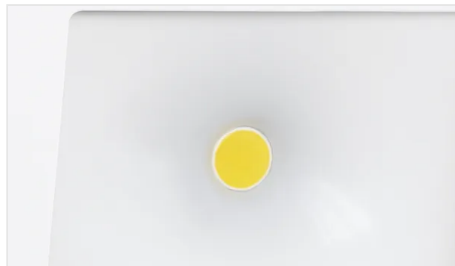

UV-resistant plastic

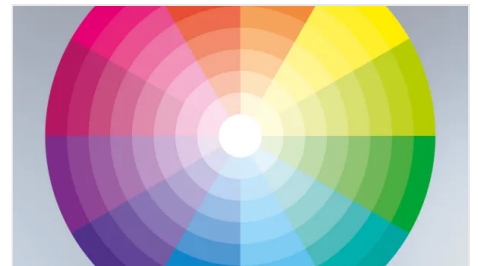

Colour rendering index Ra ≥80



Optional corner wall mount bracket

LS 150 S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841052553

E-Nr. 924712410

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841630669	Eckwandhalter LS150 S weiss	Accessory

ORDERING INFORMATION Art.-Nr. 052553 EAN 4007841052553 E-Number 924712410 Typ LS 150 S white	nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss
---	--