

IR Quattro HD 24m DALI plus Surface wiring

neva
lux

PRESENCE DETECTOR

EAN 4007841035273

E-Nr. 535933606

 **steinel**

65 x 120 x 120 mm



IR Quattro HD 24m DALI plus Surface wiring

PRESENCE DETECTOR

EAN 4007841035273

E-Nr. 535933606

Technical Data

IDENTIFICATION	
Version	Presence detector
DIMENSIONS	
Dimensions L x W x H	65 x 120 x 120 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Own consumption	0,5 W
Control output DALI	Broadcast 64 electronic ballasts / Addressable
SENSOR TECHNOLOGY	
Max. mounting height	10,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	No
Mechanical scalability	Yes
Radial range	8 x 8 m (64 m²)
Tangential range	20 x 20 m (400 m²)
Switching zones	4800 switching zones
Mounting height	2,50 – 10,00 m
Presence range	8 x 8 m (64 m²)

Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Type of networking	Master/master Master/slave
Networking via	Cable DALI bus
LIGHTING TECHNOLOGY	
Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes
SETTINGS	
Twilight switch	Yes
Twilight setting	10 – 1000 lx
Time setting	5 s – 60 Min.
Base light function	Yes
Base light function time	1-60 min, all night
Main light adjustable	50 - 100 %
Functions	4 inputs for conventional switches Semi-/fully automatic Constant-lighting control ON-OFF Master/slave override Neighbouring group function Normal / test mode TouchDIM function
Settings via	Remote control Smart Remote
With remote control	No
Twilight setting teach	Yes

Base light function in percent	10 – 50 %
Base light function percent from	10 %
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from 0 up to 40 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Surface wiring
Material	Plastic
Application room	Indoors changing room classroom conference room / meeting room duty room high-bay warehouse lecture hall multi-storey / underground car park open- plan office production facilities reception / lobby recreation room sports hall
Colour	white
RAL colour	9010
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
Certificates	VDE DALI-2


IR Quattro HD 24m DALI plus Surface wiring

PRESENCE DETECTOR

EAN 4007841035273
E-Nr. 535933606

Illustrations

TECHNICAL DRAWINGS

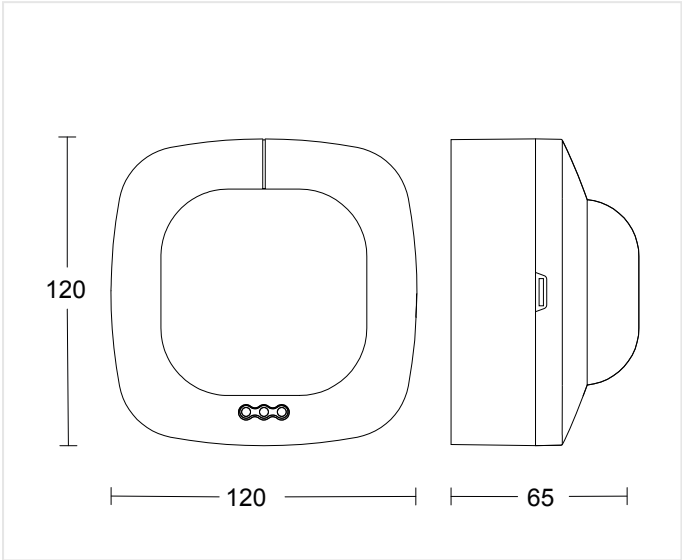

65 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
---------------------------	------------------	----------------


IR Quattro HD 24m DALI plus Surface wiring

PRESENCE DETECTOR

EAN 4007841035273
E-Nr. 535933606


Wiring Diagrams

WIRING DIAGRAM 1

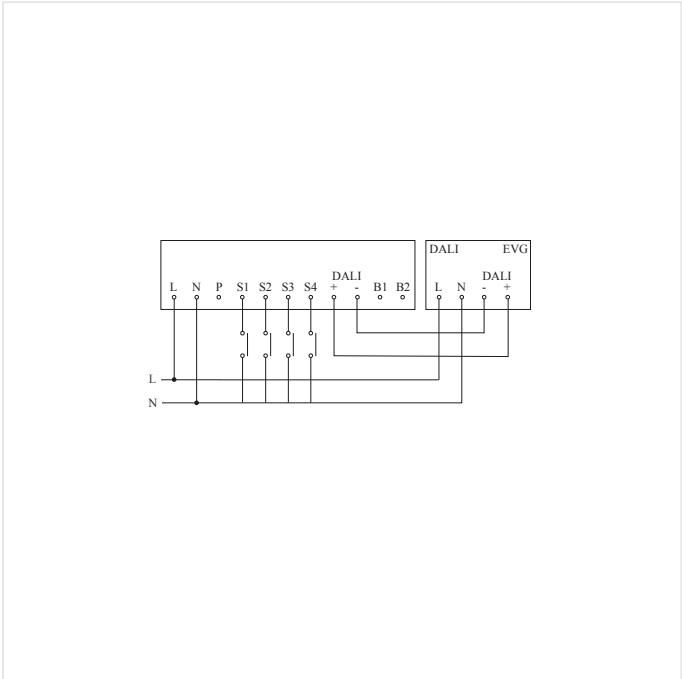

Master circuit diagram

WIRING DIAGRAM 2

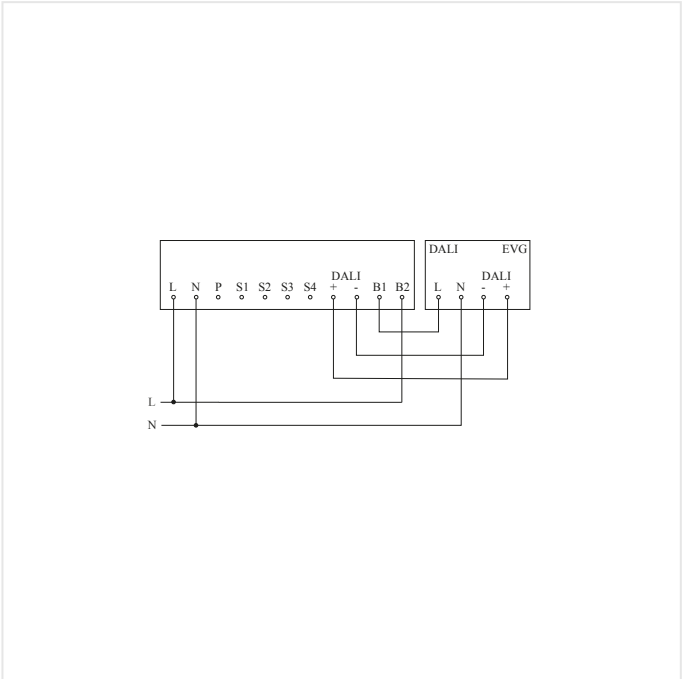

Master circuit diagram with electronic ballast OFF

IR Quattro HD 24m DALI plus Surface wiring

PRESENCE DETECTOR

EAN 4007841035273

E-Nr. 535933606

Highlights



4 pyros with DSP (Digital Signal Processing)



Smart Remote remote control optional

IR Quattro HD 24m DALI plus Surface wiring

PRESENCE DETECTOR

EAN **4007841035273**

E-Nr. **535933606**

Accessories

ORDERING INFORMATION

Art.-Nr.	035273
EAN	4007841035273
E-Number	535933606
Typ	IR Quattro HD 24m DALI plus Surface wiring

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss