

US 360 KNX - Concealed wiring

PRESENCE DETECTOR

neva
lux

EAN 4007841059514

E-Nr. 535933340

● steinel

66 x 120 x 120 mm



US 360 KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059514

E-Nr. 535933340

Technical Data

IDENTIFICATION		US technology		40 kHz		Main light adjustable		0 - 100 %			
Version		Presence detector		Optimal mounting height		3,5 m		Settings via		ETS software Remote control Bus Smart Remote	
DIMENSIONS		CONNECTIVITY									
Dimensions L × W × H		66 x 120 x 120 mm		Networking		Yes		With remote control		No	
ELECTRICAL		Type of networking		Master/master Master/slave		Twilight setting teach				Yes	
Mains connection		24 – 29 V		Networking via		KNX bus		HOUSING & MATERIAL			
Supply voltage detail		KNX bus		KNX functions		Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Light output 4x Presence output Day / night function Logic gate		Protection class (IP)		IP20	
SENSOR TECHNOLOGY		With bus coupler		Yes		Ambient temperature		from -20 up to 55 °C			
Max. mounting height		2,80 m		LIGHTING TECHNOLOGY		Mounting location		ceiling			
Sensor technology		Ultrasonic		Soft light start		Yes		Application location		Indoors	
With motion detector		Yes		Continuous light		selectable		Mounting type		Concealed wiring	
Detection angle		360 °		Constant light regulation		Yes		Material		Plastic	
Opening angle		180 °		SETTINGS		Twilight switch		Yes		Application room	
Sneak-under protection		Yes		Twilight setting		10 – 1000 lx		Colour		white	
Segment-by-segment masking		No		Time setting		10 s – 1092 Min.		RAL colour		9010	
Electronic scalability		Yes		Base light function		Yes		SCOPE OF DELIVERY & WARRANTY			
Mechanical scalability		No		Base light function time		1-30 min, all night		Manufacturer warranty		5 years	
Radial range		Ø 10 m (79 m²)						Corner wall bracket included		No	
Tangential range		Ø 6 m (28 m²)									
Mounting height		2,50 – 2,8 m									
Presence range		Ø 6 m (28 m²)									

US 360 KNX - Concealed wiring


PRESENCE DETECTOR

EAN 4007841059514

E-Nr. 535933340

Illustrations

TECHNICAL DRAWINGS

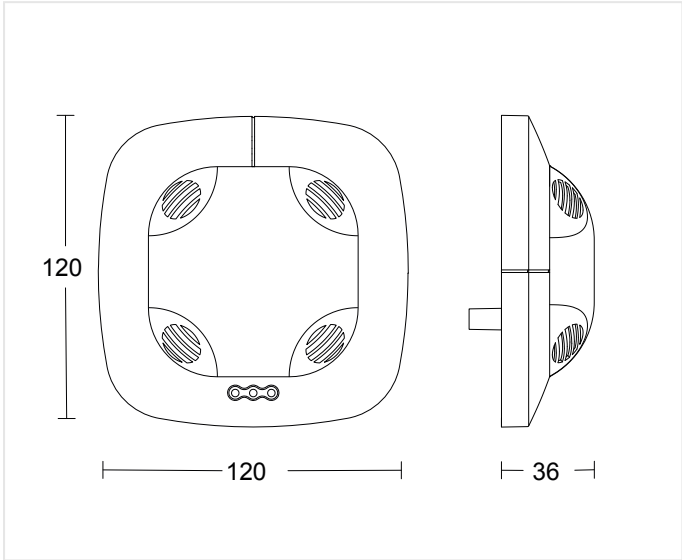

66 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 2,8 m BEREICH	3,5 m OPTIMAL	2,80 m MAX
-------------------------	------------------	---------------

US 360 KNX - Concealed wiring

PRESENCE DETECTOR


EAN 4007841059514

E-Nr. 535933340


Highlights




Optional remote controls

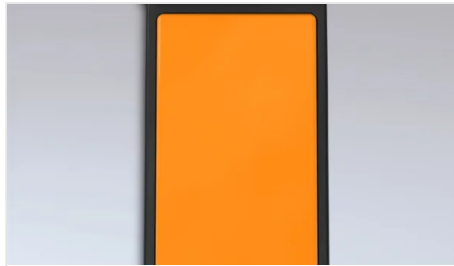

Smart Remote remote control optional

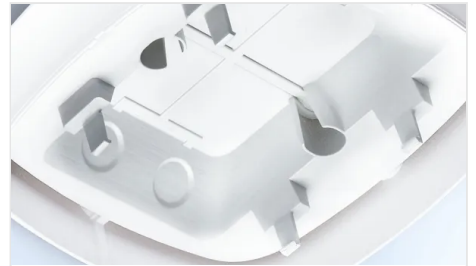

Optional surface-mounting adapter

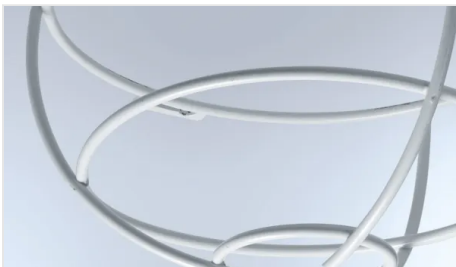

Optional guard cage

US 360 KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059514
E-Nr. 535933340

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841000363	Aufputz-Adapter Control Pro IP54 weiss	Accessory
 4007841003036	Control PRO Schutzkorb	Accessory
 4007841009151	Smart Remote	Accessory
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory

ORDERING INFORMATION

Art.-Nr.

059514

EAN

4007841059514

E-Number

535933340

Typ

US 360 KNX - Concealed wiring

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss