

lisha P1800 Wallwasher 4K

LISHA


neva
lux

Product code 220183

- For directional lighting of walls and wall boards
- Direct and indirect light proportion separately controllable
- Link technology for seamless extension of the luminaire with continuous wiring
- Dimmable DALI, LiveLink compatible
- Variants with 1.2 and 1.8 meter length available
- Housing Aluminium RAL9016, white

neva
lux

1805 x 50 x 95 mm

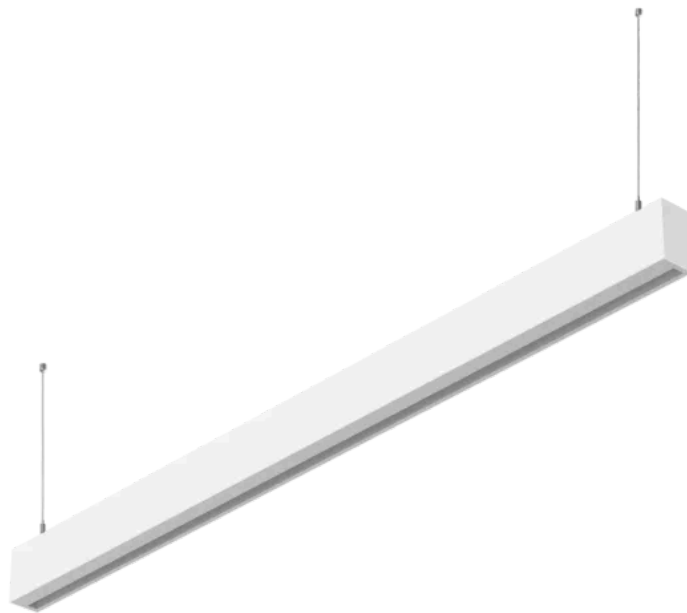

lisha P1800 Wallwasher 4K

Product code 220183

LISHA

Technical Data

DIMENSIONS					
Dimensions L x W x H	1805 x 50 x 95 mm	LED colour deviation	SDCM3	Constant light output control	Yes
Suspension length	1500 mm	Colour rendering index	80-89	HOUSING & MATERIAL	
ELECTRICAL		Illuminant	LED	Protection class (IP)	IP20
Mains connection	200...240 V / 50 – 60 Hz	Luminous flux	6100 lm (Down 3700, Up 2400)	Protection class	I
Power	70 W	Beam angle	Down Wallwasher, Up 115°	Ambient temperature	-20...45 °C
Replaceable driver	Yes	Luminaire luminous efficacy	87 lm/W	Housing material	Aluminum
Type of wiring	Through wiring included	Glare value	UGR < 19	Cover material	Aluminium - Acrylic glass opal
LED rated current	700 mA / 350 mA	LIFETIME		Mounting type	Ceiling pendant
Maximum number of luminaires per circuit breaker	C10: 15x, C16: 23x, C20: 29x, B10: 9x, B16: 14x, B25: 17x	LED lifespan (25 °C)	50000 h	Colour	white
SENSOR TECHNOLOGY		SETTINGS		SCOPE OF DELIVERY & WARRANTY	
With motion detector	No	DALI dimming	Yes	Manufacturer warranty	5 years
With light sensor	No	With emergency light	No	CERTIFICATES & EPREL	
LIGHTING TECHNOLOGY		Suitable for light band configuration	Yes	EPREL energy efficiency class	F
Colour temperature	4000 K	Direct/indirect ratio separately controllable	Yes		

lisha P1800 Wallwasher 4K

LISHA

Product code 220183

Accessories

ORDERING INFORMATION	
Art.-Nr.	220183
Typ	lisha P1800 Wallwasher 4K
nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	