

IS 3360 DALI-2 APC - in-ceiling installation, sq.

neva
lux**PRESENCE DETECTOR**

EAN 4007841080624

E-Nr. 535918106

 **steinel**

121 x 94 x 94 mm



IS 3360 DALI-2 APC - in-ceiling installation, sq.

PRESENCE DETECTOR

EAN 4007841080624
E-Nr. 535918106

Technical Data

IDENTIFICATION	
Version	Motion and Presence Detector
DIMENSIONS	
Dimensions L x W x H	121 x 94 x 94 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Control output DALI	Broadcast 1x30 electronic ballasts
SENSOR TECHNOLOGY	
Max. mounting height	4,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Opening angle	180 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	Ø 8 m (50 m²)
Tangential range	Ø 40 m (1257 m²)
Switching zones	1416 switching zones
Mounting height	2,50 – 4,00 m

Presence range	Ø 3 m (7 m²)
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Type of networking	Master/slave
Networking via	Cable
LIGHTING TECHNOLOGY	
Soft light start	Yes
Continuous light	selectable, 4h
Constant light regulation	Yes
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Base light function	Yes
Base light function time	1-30 min all night
Main light adjustable	50 - 100 %
Functions	Normal / test mode Manual ON / ON-OFF Constant-lighting control ON-OFF
Settings via	Remote control Potentiometers Smart Remote
With remote control	No
Twilight setting teach	Yes


Base light function in percent	10 – 50 %
Base light function percent from	10 %
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	In-ceiling installation
Material	Plastic
Application room	Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park production facilities reception / lobby recreation room sports hall stairwell warehouse
Colour	white
RAL colour	9003
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
Certificates	DALI-2

IS 3360 DALI-2 APC - in-ceiling installation, sq.
PRESENCE DETECTOR

EAN 4007841080624
E-Nr. 535918106

Illustrations

TECHNICAL DRAWINGS

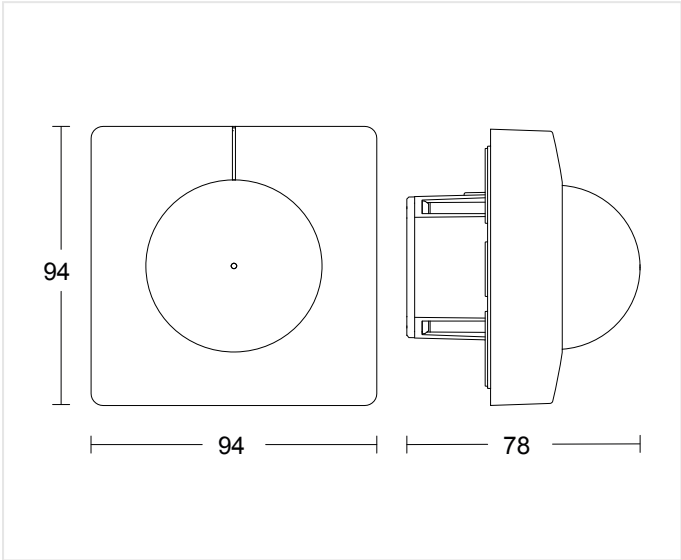

121 x 94 x 94 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IS 3360 DALI-2 APC - in-ceiling installation, sq.

PRESENCE DETECTOR

EAN 4007841080624
E-Nr. 535918106


Wiring Diagrams

WIRING DIAGRAM 1

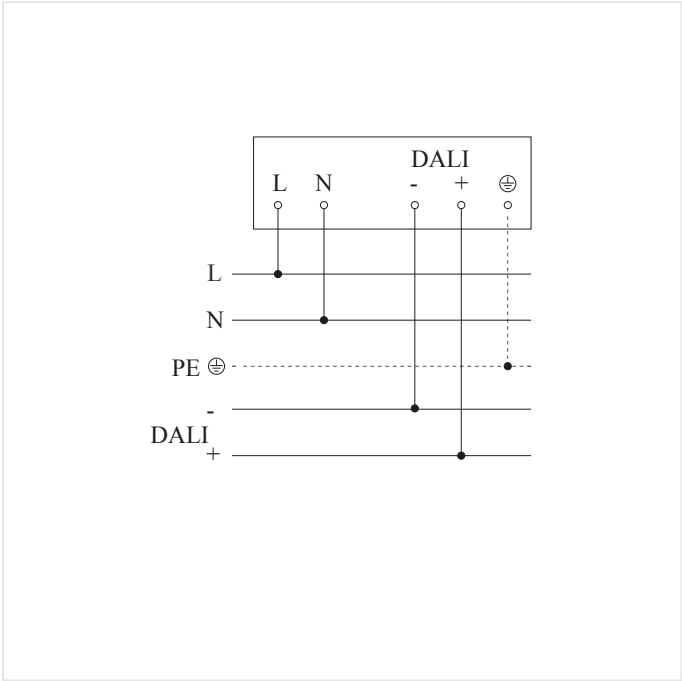

Master circuit diagram

WIRING DIAGRAM 2

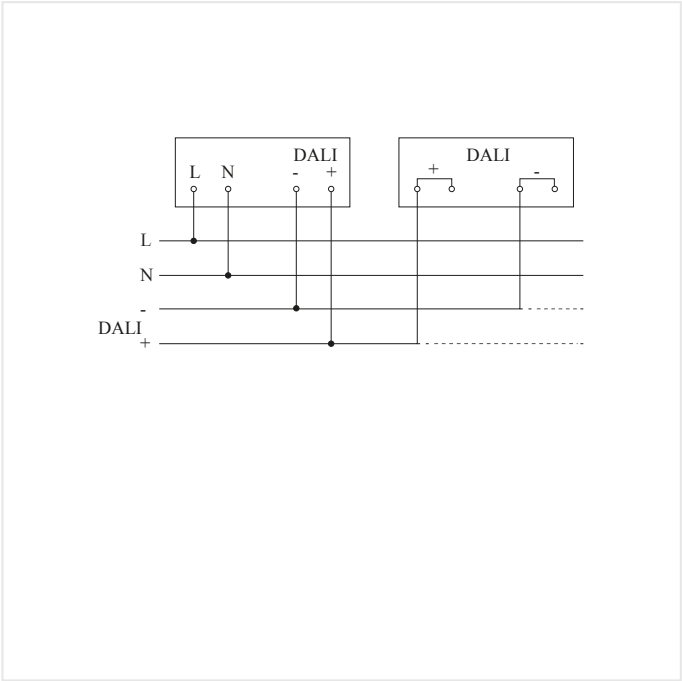

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IS 3360 DALI-2 APC - in-ceiling installation, sq.

PRESENCE DETECTOR

EAN 4007841080624

E-Nr. 535918106

Highlights



UV-resistant plastic



Optional remote controls

IS 3360 DALI-2 APC - in-ceiling installation, sq.
PRESENCE DETECTOR

EAN 4007841080624
E-Nr. 535918106

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

080624

EAN

4007841080624

E-Number

535918106

Typ

IS 3360 DALI-2 APC - in-ceiling installation, sq.

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss