XLED PRO ONE without motion detector - white

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841086855

- Floodlight redefined. The floodlight XLED PRO ONE, which can be swivelled vertically through 180° without a sensor and comes in a stylish aluminium housing, ensures daylight illumination of large areas with warm white 3000 K and 2236 lm at 17,7 W. Suitable for manual switch operation and for cable-based networking in conjunction with a sensor version. With optional surface-mounted adapter. Available in white or anthracite. 5-year guarantee.

182 x 229 x 206 mm



XLED PRO ONE without motion detector - white

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841086855

Technical Data

DIMENSIONS

Dimensions L × W × H	182 x 229 x 206 mm

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Power	17,7 W

SENSOR TECHNOLOGY

With motion detector	No

CONNECTIVITY

Networking	Yes
Type of networking	Master/slave
Control technology	On/Off-Leuchte

LIGHTING TECHNOLOGY

Measured luminous flux 360°	2236 lm
Colour temperature	3000 K
LED colour deviation	SDCM3
Colour rendering index	80-89
With illuminant	Yes, STEINEL LED system
Illuminant	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control

LIFETIME

LED lifetime L70B50 25°C	> 36000 h

SETTINGS

Twilight switch	No
Base light function	No
Main light adjustable	No
Functions	Relay output
Twilight setting teach	No

HOUSING & MATERIAL

Impact resistance	IK03
Protection class (IP)	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Glass transparent
Cover material (scope of delivery)	shrouds
Mounting location	ceiling wall
Application location	Outdoors
Mounting type	Surface wiring
Application room	all round the building courtyard & driveway front door garden outdoors
Colour	white

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

CERTIFICATES & EPREL

EPREL category	Light source


XLED PRO ONE without motion detector - white

EAN 4007841086855

LED FLOODLIGHT WITHOUT SENSOR

Illustrations

TECHNICAL DRAWINGS

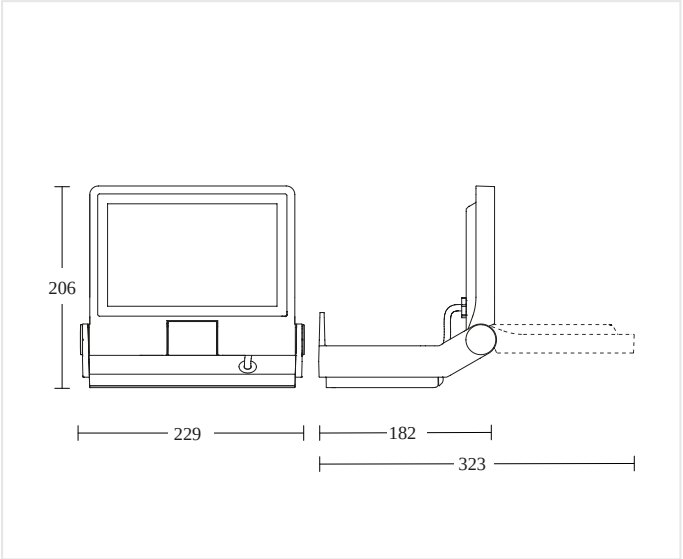

182 x 229 x 206 mm


XLED PRO ONE without motion detector - white

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841086855


Wiring Diagrams

WIRING DIAGRAM 1



Slave circuit diagram

WIRING DIAGRAM 2

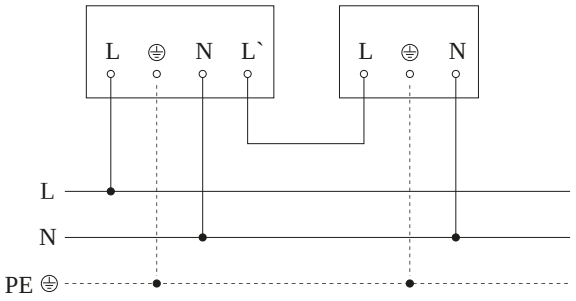

Master/slave interconnection circuit diagram

XLED PRO ONE without motion detector - white

LED FLOODLIGHT WITHOUT SENSOR

EAN **4007841086855**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841080990	**Aufputz-Adapter XLED PRO ONE anthrazit**	Accessory
	4007841079000	**RC 12**	Accessory

ORDERING INFORMATION

Art.-Nr.	4007841086855
EAN	4007841086855
Typ	**XLED PRO ONE without motion detector - white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss