L 40 C without motion detector, with Bluetooth

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841085230
E-Nr. 941012879

- Outdoor light without motion detector, with high-quality, square aluminium housing
- Wireless networking via Bluetooth Mesh and easy setting via STEINEL Connect App
- Functions: adjustable basic and main light (basic light only in combination with a Bluetooth sensor luminaire), scheduling function
- Warm white light (3000 K) and long-life 12,9 W LEDs with 869 lm
- Incl. mounting accessories - plastic-free packaging

105 x 201 x 229 mm



L 40 C without motion detector, with Bluetooth

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN **4007841085230**
E-Nr. **941012879**

Technical Data

DIMENSIONS

Dimensions L × W × H	**105 x 201 x 229 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**12,9 W**

SENSOR TECHNOLOGY

With motion detector	**No**

CONNECTIVITY

Networking	**Yes**
Type of networking	**Master/master Master/slave**
Control technology	**Steinel Connect**
Wireless networking via	**BT SIG Mesh**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**869 lm**
Efficiency	**67,4 lm/W**
Colour temperature	**3000 K**
Colour rendering index	**= 82**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
Base	**without**
LED cooling system	**Passive Thermo Control**
Soft light start	**Yes**
Continuous light	**selectable**

LIFETIME

LED lifetime L70B50 25°C	**> 60000 h**
Average rated power supply lifetime at 25 °C	**> 60000 h**

SETTINGS

Twilight switch	**Yes**
Base light function	**Yes**
Base light function detail	**only in combination with the SC version**
Main light adjustable	**5 - 100 %**
Settings via	**Smartphone Tablet Bluetooth Mesh**
With remote control	**No**
Twilight setting teach	**Yes**
Base light function in percent	**10 – 100 %**
Base light function percent from	**10 %**

HOUSING & MATERIAL

Impact resistance	**IK03**
Protection class (IP)	**IP54**
Protection class	**I**
Ambient temperature	**from -20 up to 40 °C**
Housing material	**Aluminium**
Cover material	**Plastic, opal**
Mounting location	**wall**
Application location	**Outdoors**
Mounting type	**Surface wiring**
Material	**Aluminium**
Application room	**all round the building front door outdoors terrace / balcony**
Colour	**Anthracite**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**3 years**
House number sheet included	**No**

CERTIFICATES & EPREL

EPREL category	**Surrounded product with integrated light source**


L 40 C without motion detector, with Bluetooth

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN **4007841085230**
E-Nr. **941012879**

Illustrations

TECHNICAL DRAWINGS

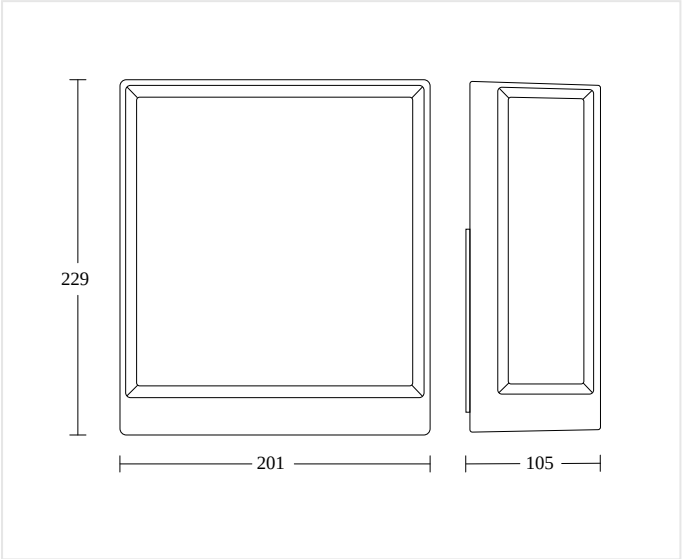

105 x 201 x 229 mm


L 40 C without motion detector, with Bluetooth

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN **4007841085230**
E-Nr. **941012879**


Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram Bluetooth

WIRING DIAGRAM 2




Circuit diagram Bluetooth

L 40 C without motion detector, with Bluetooth

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841085230
E-Nr. 941012879

Highlights

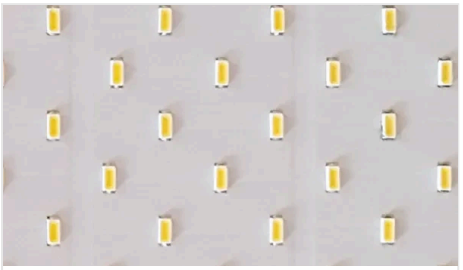

Including STEINEL LED system

Intelligent soft light start




High-quality aluminium




LED ambient light



Interconnectable and adjustable via Bluetooth

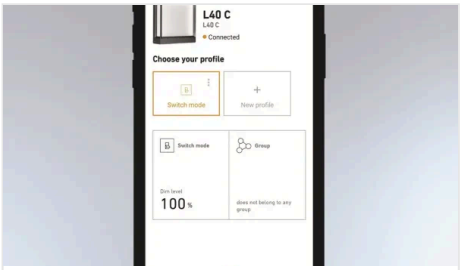

Operatable via app

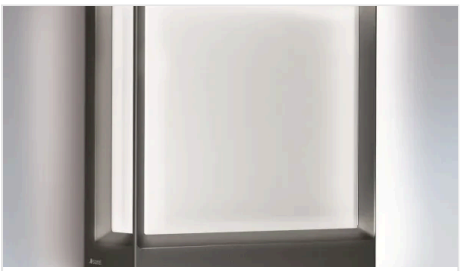


Adjustable main light brighness (5 - 100%)

L 40 C without motion detector, with Bluetooth

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN **4007841085230**
E-Nr. **941012879**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841088620	**Funkschalter TapDuo C**	System components

ORDERING INFORMATION

Art.-Nr.	085230
EAN	4007841085230
E-Number	941012879
Typ	**L 40 C without motion detector, with Bluetooth**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss