

lisha C1200 Wallwasher 4K

LISHA


neva
lux

Product code 220178

- For directional lighting of walls and wall boards
- Link technology for seamless extension of the luminaire with continuous wiring
- Dimmable DALI, LiveLink compatible
- Versions with 1.2 and 1.8 meter length available
- Housing Aluminium RAL9016, white

neva
lux

1205 x 50 x 95 mm

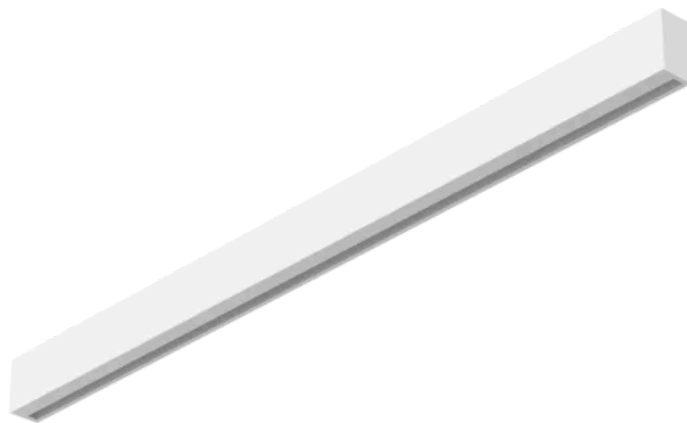

lisha C1200 Wallwasher 4K

Product code 220178

LISHA

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY		Suitable for light band configuration	Yes
Dimensions L x W x H	1205 x 50 x 95 mm	Colour temperature	4000 K		
ELECTRICAL		LED colour deviation	SDCM3	HOUSING & MATERIAL	
Mains connection	200...240 V / 50 – 60 Hz	Colour rendering index	80-89	Protection class (IP)	IP20
Power	36 W	Illuminant	LED	Protection class	I
Replaceable driver	Yes	Luminous flux	2700 lm	Ambient temperature	-20...45 °C
Type of wiring	Through wiring included	Beam angle	Wallwasher	Housing material	Aluminum
LED rated current	500 mA	Luminaire luminous efficacy	75 lm/W	Cover material	Aluminium - Acrylic glass opal
Maximum number of luminaires per circuit breaker	C10: 30x, C16: 46x, C20: 58x, B10: 18x, B16: 28x, B25: 34x	Glare value	UGR < 19	Mounting type	Ceiling surface-mounted
SENSOR TECHNOLOGY		LIFETIME		Colour	white
With motion detector	No	LED lifespan (25 °C)	50000 h	SCOPE OF DELIVERY & WARRANTY	
With light sensor	No	SETTINGS		Manufacturer warranty	5 years
		DALI dimming	Yes	CERTIFICATES & EPREL	
		With emergency light	No	EPREL energy efficiency class	G

lisha C1200 Wallwasher 4K

LISHA

Product code 220178

Accessories

ORDERING INFORMATION	
Art.-Nr.	220178
Typ	lisha C1200 Wallwasher 4K
nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	