

Dual HF KNX - Concealed wiring

PRESENCE DETECTOR

neva
lux

EAN 4007841059477

E-Nr. 535935508

● steinel

73 x 120 x 120 mm



Dual HF KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059477
E-Nr. 535935508

Technical Data

IDENTIFICATION			Mechanical scalability			Twilight setting		
Version			Radial range			Time setting		
Presence detector			20 x 3 m (60 m²)			10 s – 1092 Min.		
DIMENSIONS			Tangential range			Base light function		
Dimensions L x W x H			20 x 3 m (60 m²)			Yes		
ELECTRICAL			Mounting height			Main light adjustable		
Mains connection			2,50 – 3,5 m			0 - 100 %		
Supply voltage detail			Optimal mounting height			Settings via		
230 V / 50 – 60 Hz			2,8 m			ETS software Remote control Bus Smart Remote		
SENSOR TECHNOLOGY			CONNECTIVITY			With remote control		
Max. mounting height			Networking			No		
Sensor technology			Type of networking			Twilight setting teach		
High frequency			Master/master Master/slave			Yes		
Transmission power			Networking via			HOUSING & MATERIAL		
< 1 mW			KNX bus			Ambient temperature		
HF technology			KNX functions			from -25 up to 55 °C		
Detection			Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Light output 4x Presence output Day / night function Logic gate			Mounting location		
also through glass, wood and stud walls			With bus coupler			ceiling		
Detection angle			Yes			Application location		
360 °			LIGHTING TECHNOLOGY			Indoors		
Opening angle			Soft light start			Mounting type		
140 °			Yes			Concealed wiring		
Sneak-under protection			Continuous light			Material		
Yes			selectable			Plastic		
Segment-by-segment masking			Constant light regulation			Application room		
No			No			Indoors corridor / aisle		
Electronic scalability			SETTINGS			Colour		
Yes			Twilight switch			white		
						RAL colour		
						9010		
						SCOPE OF DELIVERY & WARRANTY		
						Manufacturer warranty		
						5 years		
						Corner wall bracket included		
						No		


Dual HF KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059477
E-Nr. 535935508

Illustrations

TECHNICAL DRAWINGS

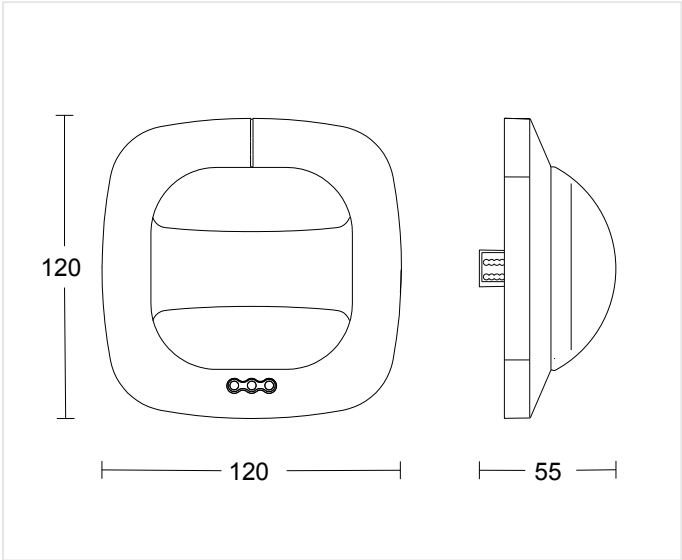

73 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 3,5 m BEREICH	2,8 m OPTIMAL	3,50 m MAX
-------------------------	------------------	---------------

Dual HF KNX - Concealed wiring

PRESENCE DETECTOR


EAN 4007841059477

E-Nr. 535935508


Highlights




Optional remote controls

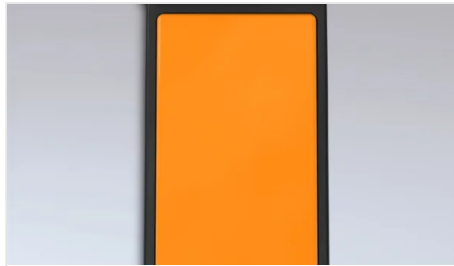

Smart Remote remote control optional

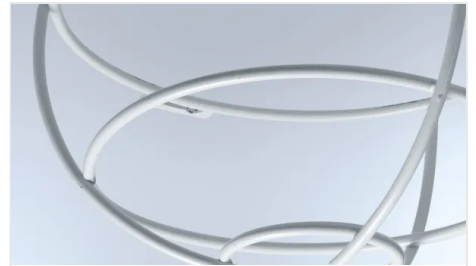

Optional guard cage

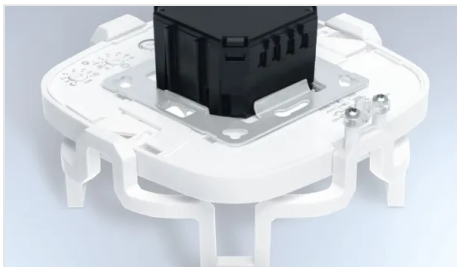

HF ceiling adapter for installation in
suspended ceilings

Dual HF KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059477
E-Nr. 535935508

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841003036	Control PRO Schutzkorb	Accessory
 4007841006600	HF-Deckenadapter	Accessory
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory
 4007841009151	Smart Remote	Accessory
 4007841000363	Aufputz-Adapter Control Pro IP54 weiss	Accessory

ORDERING INFORMATION

Art.-Nr.

059477

EAN

4007841059477

E-Number

535935508

Typ

Dual HF KNX - Concealed wiring

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss