

RS PRO P1 flat Neutral white

LED INDOOR LIGHT WITHOUT SENSOR

neva
lux

EAN 4007841069698

E-Nr. 941003279

 **steinel**

272 x 64 mm



RS PRO P1 flat Neutral white

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069698
E-Nr. 941003279

Technical Data

DIMENSIONS		With illuminant	Yes, STEINEL LED system	Protection class (IP)	IP54
Dimensions Ø x H	272 x 64 mm	Illuminant	LED cannot be replaced	Protection class	II
ELECTRICAL		Base	without	Ambient temperature	from -10 up to 40 °C
Mains connection	220 – 240 V / 50 – 60 Hz	LED cooling system	Passive Thermo Control	Housing material	Plastic
Power	8,2 W	Soft light start	Yes	Cover material	Plastic, opal
SENSOR TECHNOLOGY		LIFETIME		Mounting location	ceiling wall
With motion detector	No	LED lifetime max. °C	60000 h	Colour	white
CONNECTIVITY		LED lifetime L70B50 25°C	> 60000 h	SCOPE OF DELIVERY & WARRANTY	
Networking via	Cable	Luminous flux decline per LM80	L80B10	Manufacturer warranty	5 years
LIGHTING TECHNOLOGY		SETTINGS		CERTIFICATES & EPREL	
Measured luminous flux 360°	930 lm	Main light adjustable	No	Certificates	DEKRA
Colour temperature	4000 K	HOUSING & MATERIAL		EPREL category	Surrounded product with integrated light source
		Impact resistance	IK03		

RS PRO P1 flat Neutral white


LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069698

E-Nr. 941003279

Illustrations

TECHNICAL DRAWINGS

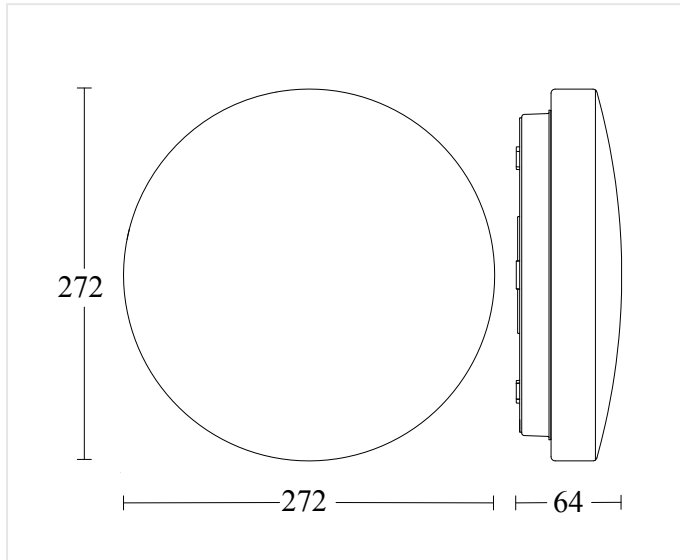

272 x 64 mm

RS PRO P1 flat Neutral white


LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069698

E-Nr. 941003279


Wiring Diagrams

WIRING DIAGRAM 1

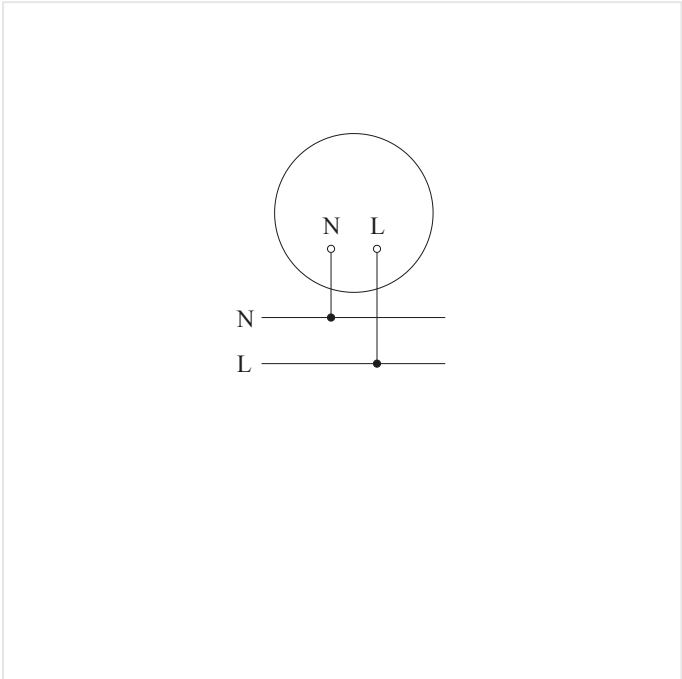

Master circuit diagram

WIRING DIAGRAM 2

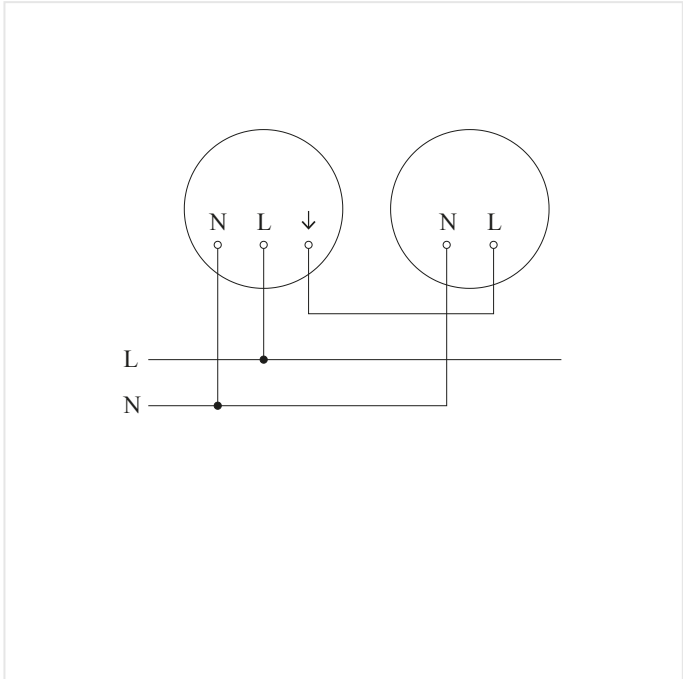

Master/slave interconnection circuit diagram

RS PRO P1 flat Neutral white

LED INDOOR LIGHT WITHOUT SENSOR


EAN 4007841069698

E-Nr. 941003279

Highlights



Including STEINEL LED system

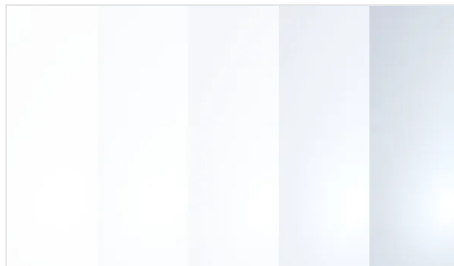

Intelligent soft light start



Interconnectable by cable (maximum of 10 units)

RS PRO P1 flat Neutral white

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841069698

E-Nr. 941003279

Accessories

ORDERING INFORMATION

Art.-Nr.	069698
EAN	4007841069698
E-Number	941003279
Typ	RS PRO P1 flat Neutral white



nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss