

IS 3360 COM1 - in-ceiling installation, rd. white

neva
lux**PRESENCE DETECTOR**

EAN 4007841079659

E-Nr. 535918120

 **steinel**

124 x 121 mm



IS 3360 COM1 - in-ceiling installation, rd. white

PRESENCE DETECTOR

EAN 4007841079659

E-Nr. 535918120

Technical Data

IDENTIFICATION					
Version	Motion and Presence Detector	Detection angle	360 °	Base light function	No
		Opening angle	180 °	Main light adjustable	No
		Sneak-under protection	Yes	Functions	Normal / test mode Manual ON / ON-OFF
DIMENSIONS		Segment-by-segment masking	Yes	Settings via	Remote control Potentiometers Smart Remote
Dimensions Ø x H	124 x 121 mm	Electronic scalability	No	With remote control	No
ELECTRICAL		Mechanical scalability	No	Twilight setting teach	Yes
Mains connection	220 – 240 V / 50 – 60 Hz	Radial range	Ø 8 m (50 m²)	HOUSING & MATERIAL	
Power	2000 W	Tangential range	Ø 40 m (1257 m²)	Protection class (IP)	IP20
Switching output 1 resistive	2000 W	Switching zones	1416 switching zones	Ambient temperature	from -20 up to 50 °C
Fluorescent lamps ECG	1500 W	Mounting height	2,50 – 4,00 m	Mounting location	ceiling
Fluorescent lamps uncompensated	1000 VA	Presence range	Ø 3 m (7 m²)	Application location	Indoors
Fluorescent lamps series-compensated	400 VA	Optimal mounting height	2,8 m	Mounting type	In-ceiling installation
Fluorescent lamps parallel-compensated	400 VA	CONNECTIVITY		Material	Plastic
Switching output 1 low-voltage halogen lamps	2000 VA	Networking	Yes	Application room	Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park production facilities reception / lobby recreation room sports hall stairwell warehouse
LED lamps < 2 W	100 W	Type of networking	Master/master	Colour	white
LED lamps > 2 W < 8 W	300 W	Networking via	Cable	RAL colour	9003
LED lamps > 8 W	600 W	Networking quantity	max. 10 sensors	SCOPE OF DELIVERY & WARRANTY	
Capacitive load in µF	176 µF	LIGHTING TECHNOLOGY		Manufacturer warranty	5 years
Switching output 1 number of LED/fluorescent lamps	8 pcs.	Soft light start	No	Corner wall bracket included	No
SENSOR TECHNOLOGY		Continuous light	selectable, 4h		
Max. mounting height	4,00 m	Constant light regulation	No		
Sensor technology	passive infrared	SETTINGS			
With motion detector	Yes	Twilight switch	Yes		
		Twilight setting	2 – 1000 lx		
		Time setting	5 s – 15 Min.		

IS 3360 COM1 - in-ceiling installation, rd. white

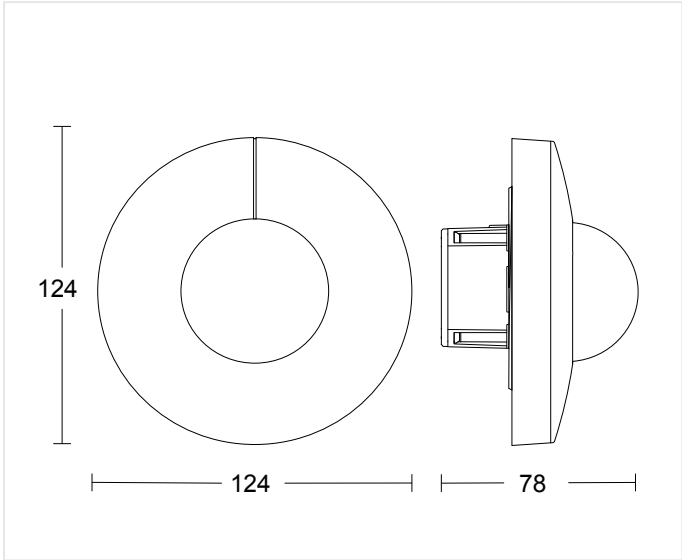
PRESENCE DETECTOR

EAN 4007841079659

E-Nr. 535918120

Illustrations

TECHNICAL DRAWINGS



124 x 121 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------

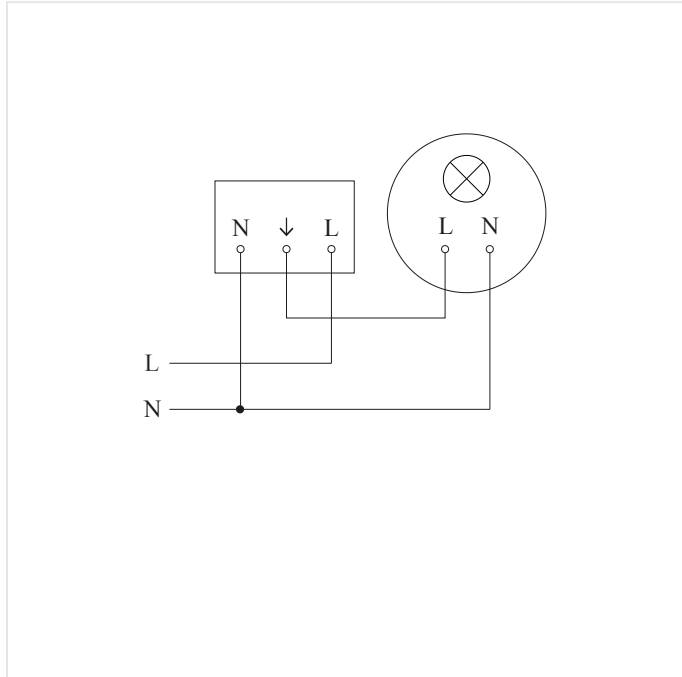
IS 3360 COM1 - in-ceiling installation, rd. white

EAN 4007841079659

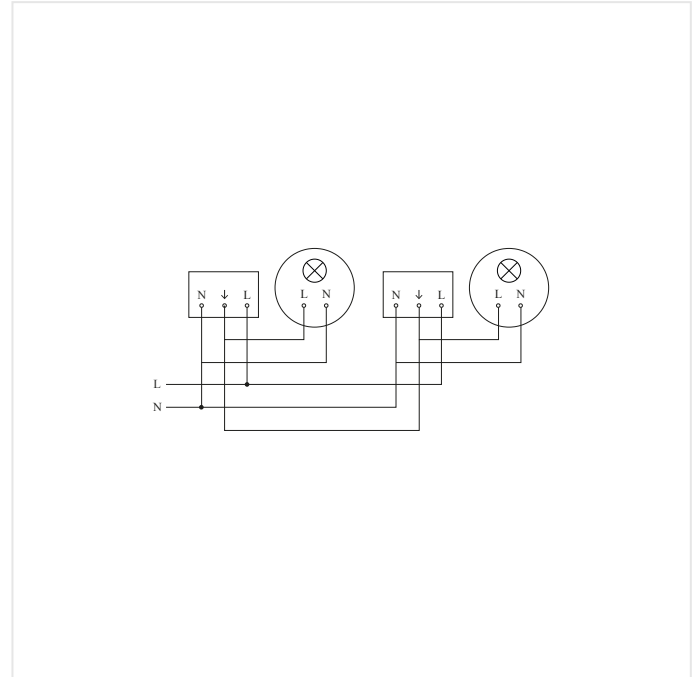
E-Nr. 535918120

PRESENCE DETECTOR

Wiring Diagrams

WIRING DIAGRAM 1

Circuit diagram

WIRING DIAGRAM 2

Circuit diagram for interconnecting several sensors

IS 3360 COM1 - in-ceiling installation, rd. white

PRESENCE DETECTOR

EAN 4007841079659

E-Nr. 535918120

Highlights



UV-resistant plastic



Optional remote controls

IS 3360 COM1 - in-ceiling installation, rd. white

PRESENCE DETECTOR

EAN 4007841079659
E-Nr. 535918120

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841056742	Schwarze Blende für IR-Sensoren Unterputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

079659

EAN

4007841079659

E-Number

535918120

Typ

IS 3360 COM1 - in-ceiling installation, rd. white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss