sensIQ S Anthracite

MOTION DETECTOR

EAN 4007841056650
E-Nr. 535940450

steinel

128 x 114 x 74 mm



sensIQ S Anthracite

MOTION DETECTOR

EAN 4007841056650
E-Nr. 535940450

Technical Data

IDENTIFICATION

Version	Motion detectors
Type of accessory	Corner adapter

DIMENSIONS

Dimensions L × W × H	128 x 114 x 74 mm

ELECTRICAL

Mains connection	100 – 240 V / 50 – 60 Hz
Power	2000 W
Switching output 1 resistive	2000 W
Fluorescent lamps ECG	1500 W
Fluorescent lamps uncompensated	1000 VA
Fluorescent lamps series-compensated	700 VA
Fluorescent lamps parallel-compensated	1000 VA
Switching output 1 low-voltage halogen lamps	1000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in µF	176 µF
Supply voltage detail	500 VA max., 120 V
Switching output 1 number of LED/fluorescent lamps	50 pcs.

SENSOR TECHNOLOGY

Max. mounting height	5,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	300 °
Opening angle	180 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	Yes
Range detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)
Radial range	r = 4 m (42 m²)
Tangential range	r = 20 m (1047 m²)
Detection planes	11
Switching zones	1360 switching zones
Mounting height	2,00 – 5,00 m
Optimal mounting height	2 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/master

LIGHTING TECHNOLOGY

Soft light start	No
Continuous light	selectable, 4h
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Base light function	No
Main light adjustable	No
Functions	Normal / test mode Manual ON / ON-OFF
Settings via	Remote control Potentiometers Smart Remote
With remote control	Yes
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP54
Ambient temperature	from -20 up to 50 °C
Mounting location	corner wall
Application location	Indoors Outdoors
Mounting type	Surface wiring
Material	Plastic
Application room	Indoors all round the building courtyard & driveway front door multi-storey / underground car park outdoors warehouse
Colour	Anthracite
RAL colour	7016

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	Yes

CERTIFICATES & EPREL

Certificates	VDE


sensIQ S Anthracite

MOTION DETECTOR

EAN 4007841056650
E-Nr. 535940450

Illustrations

TECHNICAL DRAWINGS

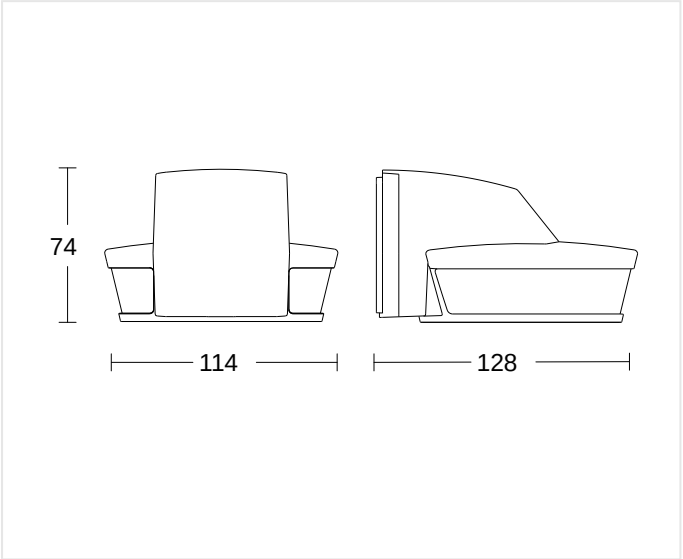

128 x 114 x 74 mm

MOUNTING HEIGHT

2,00 – 5,00 m	2 m	5,00 m
BEREICH	OPTIMAL	MAX


sensIQ S Anthracite

MOTION DETECTOR

EAN 4007841056650
E-Nr. 535940450


Wiring Diagrams

WIRING DIAGRAM 1

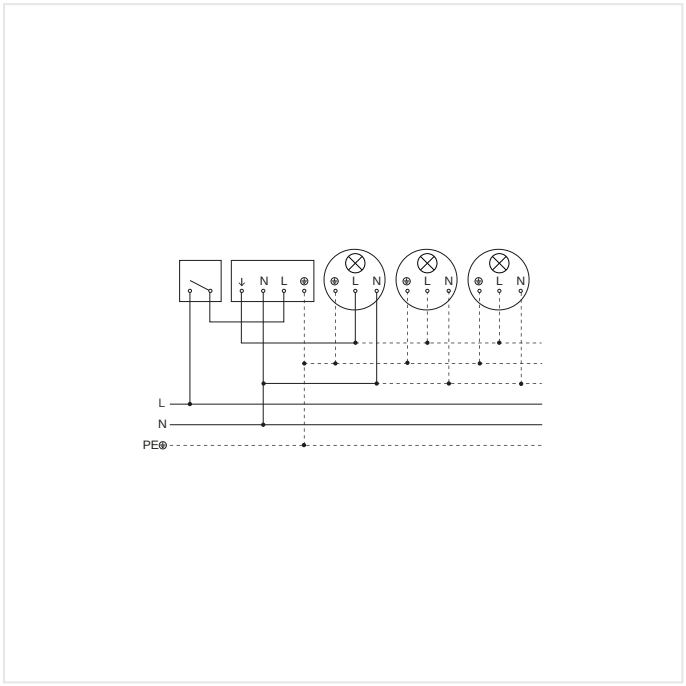

Light without neutral conductor

WIRING DIAGRAM 2

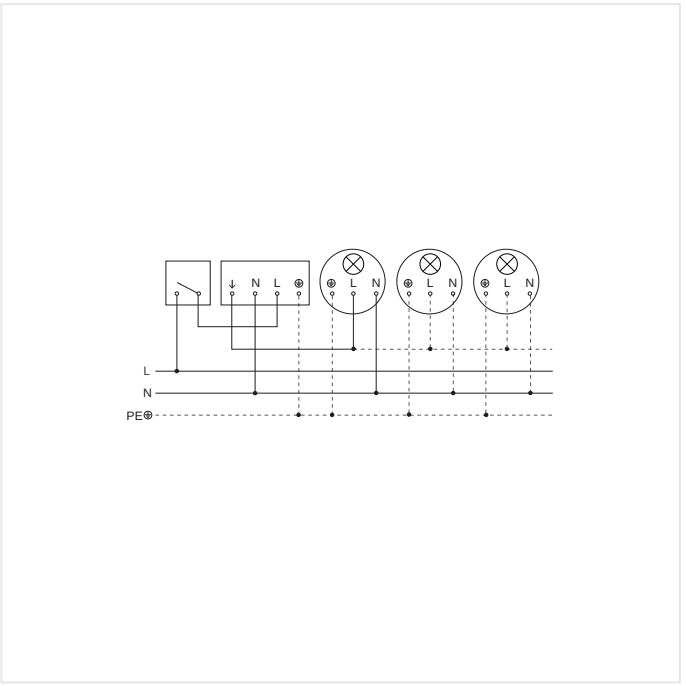


Light with neutral conductor

sensIQ S Anthracite

MOTION DETECTOR

EAN 4007841056650
E-Nr. 535940450

Highlights

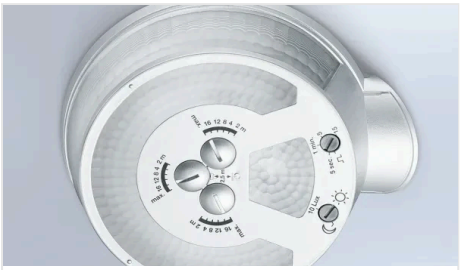

4x pyro system



UV-resistant plastic



Including corner wall mount



Remote control RC9 included



Smart Remote remote control optional

sensIQ S Anthracite

MOTION DETECTOR

EAN 4007841056650
E-Nr. 535940450

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841007638	**Fernbedienung RC9**	Accessory
	4007841009151	**Smart Remote**	Accessory

ORDERING INFORMATION

Art.-Nr.	056650
EAN	4007841056650
E-Number	535940450
Typ	**sensIQ S Anthracite**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss