

lisha C1200 4K

LISHA


neva
lux

Product code 220176

- For universal use for lighting offices, schools, traffic zones, etc.
- Available as intelligent Connect version or as conventional DALI luminaire
- Connect variant with powerful IoT lighting control for next-generation lighting projects (swarm function, grouping, cleaning light, etc.)
- Link technology for seamless extension of the luminaire with continuous wiring
- Versions with 1.2 and 1.8 meter length available
- Housing Aluminium white

neva
lux

1205 x 50 x 95 mm

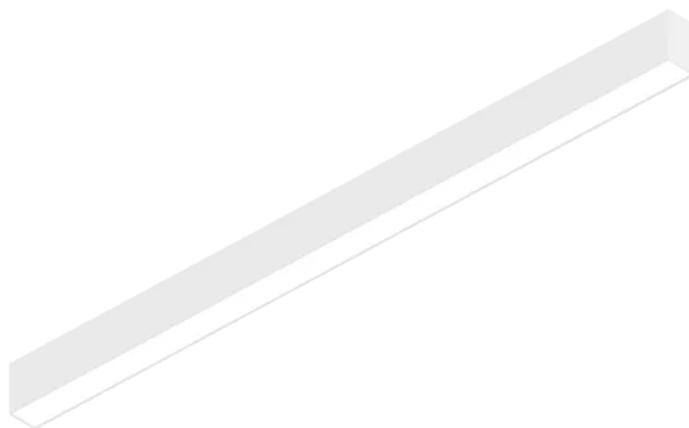

lisha C1200 4K

LISHA

Product code 220176

Technical Data

DIMENSIONS

Dimensions L x W x H	1205 x 50 x 95 mm
----------------------	-------------------

ELECTRICAL

Mains connection	200...240 V / 50 – 60 Hz
Power	36 W
Replaceable driver	Yes
Type of wiring	Through wiring included
LED rated current	700 mA
Maximum number of luminaires per circuit breaker	C10: 30x, C16: 46x, C20: 58x, B10: 18x, B16: 28x, B25: 34x

SENSOR TECHNOLOGY

With motion detector	No
With light sensor	No

LIGHTING TECHNOLOGY

Colour temperature	4000 K
LED colour deviation	SDCM3
Colour rendering index	80-89
Illuminant	LED
Luminous flux	3800 lm
Beam angle	105°
Luminaire luminous efficacy	106 lm/W
Glare value	UGR < 22

LIFETIME

LED lifespan (25 °C)	50000 h
----------------------	---------

SETTINGS

DALI dimming	Yes
With emergency light	No

Suitable for light band configuration	Yes
--	-----

HOUSING & MATERIAL

Protection class (IP)	IP20
Protection class	I
Ambient temperature	-20...45 °C
Housing material	Aluminum
Cover material	Acrylic glass opal
Mounting type	Ceiling surface-mounted
Colour	white

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
-----------------------	---------

CERTIFICATES & EPREL

EPREL energy efficiency class	E
----------------------------------	---

lisha C1200 4K

LISHA

Product code **220176**

Accessories

ORDERING INFORMATION

Art.-Nr. 220176

Typ lisha C1200 4K

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss