FRS 20 LED

SENSOR-SWITCHED INDOOR LIGHT

EAN 4007841747619
E-Nr. 924324219

- Including STEINEL LED system
- Impact-resistant material rated to IK07
- UV-resistant plastic

steinel

195 x 300 x 53 mm

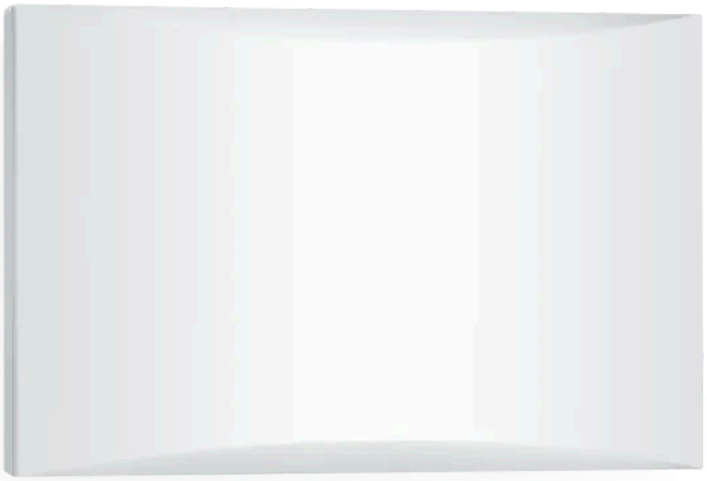

FRS 20 LED

SENSOR-SWITCHED INDOOR LIGHT

EAN **4007841747619**
E-Nr. **924324219**

Technical Data

DIMENSIONS

Dimensions L × W × H	**195 x 300 x 53 mm**

ELECTRICAL

Mains connection	**230 V / 50 – 60 Hz**
Power	**12,5 W**
Switching output 1 resistive	**200 W**

SENSOR TECHNOLOGY

Sensor technology	**High frequency**
Transmission power	**< 1 mW**
With motion detector	**Yes**
Detection	**also through glass, wood and stud walls**
Detection angle	**360 °**
Opening angle	**160 °**
Electronic scalability	**Yes**
Mechanical scalability	**No**

LIGHTING TECHNOLOGY

Colour temperature	**3000 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80 - 89**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
Base	**without**
LED cooling system	**Passive Thermo Control**
Luminous flux	**700 lm**

LIFETIME

LED lifetime max. °C	**50000 h**
Luminous flux decline per LM80	**L70B10**

SETTINGS

Twilight switch	**Yes**
Twilight setting	**2 – 2000 lx**
Time setting	**5 s – 15 min**

HOUSING & MATERIAL

Impact resistance	**IK07**
Protection class (IP)	**IP54**
Protection class	**II**
Ambient temperature	**-10...+40 °C**
Housing material	**Plastic**
Cover material	**Opal plastic**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**3 years**

FRS 20 LED

SENSOR-SWITCHED INDOOR LIGHT

EAN **4007841747619**
E-Nr. **924324219**

Accessories

ORDERING INFORMATION

Art.-Nr.	4007841747619
EAN	4007841747619
E-Number	924324219
Typ	**FRS 20 LED**

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss