

HF 360-2 COM1 - in-ceiling installation

neva
lux

PRESENCE DETECTOR

EAN 4007841086541

E-Nr. 535903136

- Perfect radial detection with a range of up to 25 m, ideal for long corridors and hallways
- Customisable range that can be set individually in both directions
- Control PRO II design for a modern and functional look that enables versatile applications
- Bluetooth technology for simple connection and control via Bluetooth
- Multiple interfaces, compatible with COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD
- External light measurement required for black sensors that can be integrated via Bluetooth or KNX

 **steinel**

100 x 103 x 103 mm



HF 360-2 COM1 - in-ceiling installation


PRESENCE DETECTOR

EAN 4007841086541

E-Nr. 535903136

Illustrations

TECHNICAL DRAWINGS

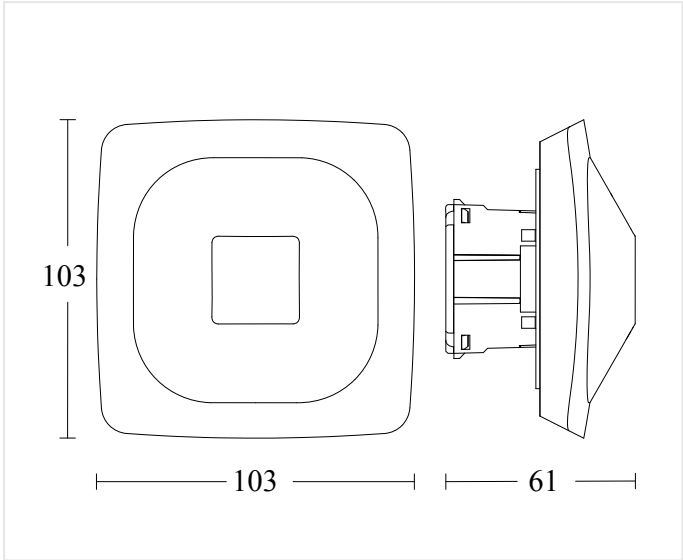

100 x 103 x 103 mm

MOUNTING HEIGHT

2,5 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------

HF 360-2 COM1 - in-ceiling installation


PRESENCE DETECTOR

EAN 4007841086541

E-Nr. 535903136

Wiring Diagrams

WIRING DIAGRAM 1



Master circuit diagram

HF 360-2 COM1 - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841086541

E-Nr. 535903136

Highlights



UV-resistant plastic

HF 360-2 COM1 - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841086541

E-Nr. 535903136

Accessories

ORDERING INFORMATION

Art.-Nr.	086541
EAN	4007841086541
E-Number	535903136
Typ	HF 360-2 COM1 - in-ceiling installation

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss