

FRS 20 LED




Product code **4007841747619**

E-Nr. **924324219**

- Including STEINEL LED system
- Impact-resistant material rated to IK07
- UV-resistant plastic

neva
lux

195 x 300 x 53 mm

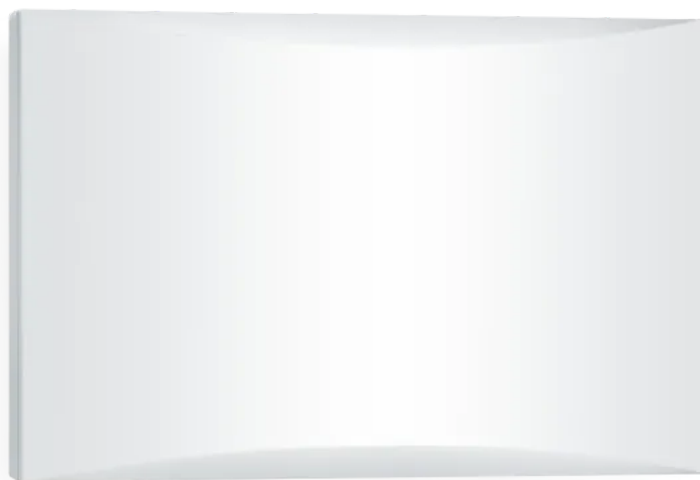

FRS 20 LED

Product code **4007841747619**
E-Nr. **924324219**

Technical Data

DIMENSIONS		Electronic scalability	Yes	SETTINGS	
Dimensions L x W x H	195 x 300 x 53 mm	Mechanical scalability	No	Twilight switch	Yes
ELECTRICAL		LIGHTING TECHNOLOGY		Twilight setting	2 – 2000 lx
Mains connection	220 – 240 V , 50 / 60 Hz	Colour temperature	3000 K	Time setting	5 sec – 15 min
Power	12,5 W	LED colour deviation	SDCM3	HOUSING & MATERIAL	
Switching output 1 resistive	200 W	Colour rendering index	80-89	Impact resistance	IK07
SENSOR TECHNOLOGY		With illuminant	Yes, STEINEL LED system	Protection class (IP)	IP54
Sensor technology	High frequency	Illuminant	LED cannot be replaced	Protection class	II
Transmission power	< 1 mW	Base	without	Ambient temperature	-10 – 40 °C
With motion detector	Yes	LED cooling system	Passive Thermo Control	Housing material	Plastic
Detection	also through glass, wood and stud walls	Luminous flux	700 lm	Cover material	Plastic, opal
		LIFETIME		SCOPE OF DELIVERY & WARRANTY	
Detection angle	360 °	LED lifetime max. °C	50000 h	Manufacturer warranty	3 years
Opening angle	160 °	Luminous flux decline per LM80	L70B10		

FRS 20 LED

Product code **4007841747619**E-Nr. **924324219**

Accessories

ORDERING INFORMATION

Art.-Nr.	4007841747619
----------	---------------

E-Number	924324219
----------	-----------

Typ	FRS 20 LED
-----	------------

**neva
lux**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss