fayola MF1 IP65 DALI D2W

DOWNLIGHT DALI DIM2WARM

Product code **220448**

- Multi-purpose use in the private and commercial sector
- Light colour becomes warmer when dimmed
- Wide beam optics 60°, Directable 30
- Optimized heat management, long lifetime
- Variants On-Off-Phasecut and DALI available

90 x 56 mm



fayola MF1 IP65 DALI D2W

DOWNLIGHT DALI DIM2WARM

Product code **220448**

Technical Data

DIMENSIONS

Dimensions Ø × H	**90 x 56 mm**
Drill hole	**75 mm**

ELECTRICAL

Mains connection	**220…240 V / 50 – 60 Hz**
Power	**8 W**
Replaceable driver	**Yes**
Type of wiring	**Ending**
LED rated current	**350 mA**

SENSOR TECHNOLOGY

With motion detector	**No**

CONNECTIVITY

Control technology	**Dali-Leuchte**
Networking via	**DALI 2**

LIGHTING TECHNOLOGY

Colour temperature	**1800…3000 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80-89**
Illuminant	**LED**
Luminous flux	**470 lm**
Beam angle	**60°**
Luminaire luminous efficacy	**59 lm/W**

LIFETIME

LED lifespan (25 °C)	**50000 h**

SETTINGS

DALI dimming	**Yes**

HOUSING & MATERIAL

Protection class (IP)	**IP65**
Protection class	**II**
Ambient temperature	**-20…40 °C**
Housing material	**Aluminum**
Cover material	**Reflector aluminium**
Mounting type	**In-ceiling installation**
Colour	**white**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**

CERTIFICATES & EPREL

EPREL energy efficiency class	**G**


fayola MF1 IP65 DALI D2W

DOWNLIGHT DALI DIM2WARM

Product code **220448**

Illustrations

TECHNICAL DRAWINGS

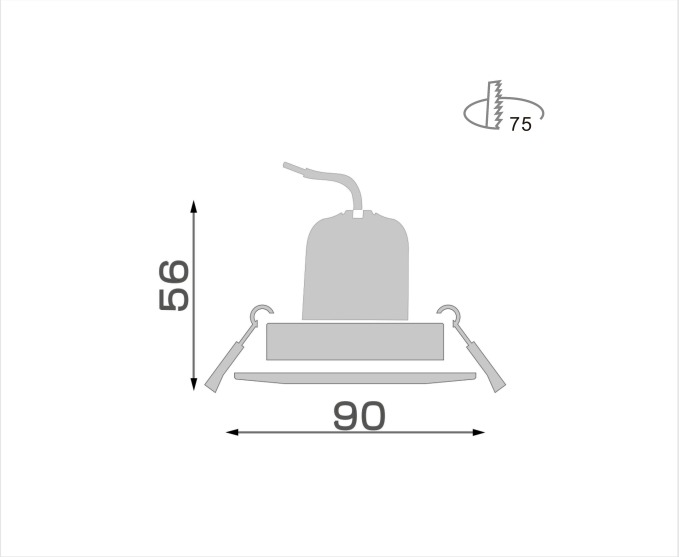

90 x 56 mm

fayola MF1 IP65 DALI D2W

DOWNLIGHT DALI DIM2WARM

Product code **220448**

Accessories

ORDERING INFORMATION

Art.-Nr.	220448
Typ	**fayola MF1 IP65 DALI D2W**

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss