RS PRO 5150 SC mit Bewegungsmelder & Bluetooth Verso

SENSOR-LED-INNENLEUCHTE

Product code **221393**
E-Nr. **941006369**

- Inklusive STEINEL LED-System
- Vernetzbar und Einstellbar via Bluetooth
- Schlagfestes Material IK 07
- Optionale Grundhelligkeit 10 - 50 %
- Optionales Hauptlicht 50 - 100 %
- Verschiebbare Halter für einfache Montage

steinel

1500 x 87 x 58 mm



RS PRO 5150 SC mit Bewegungsmelder & Bluetooth Verso

SENSOR-LED-INNENLEUCHTE

Product code **221393**
E-Nr. **941006369**

Technical Data

IDENTIFICATION

Type of accessory	**Other**

DIMENSIONS

Dimensions L × W × H	**1500 x 87 x 58 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**42 W**
Own consumption	**0,45 W**

SENSOR TECHNOLOGY

Max. mounting height	**4,00 m**
Sensor technology	**High frequency**
With motion detector	**Yes**
Detection	**also through glass, wood and stud walls**
Detection angle	**360 °**
Opening angle	**160 °**
Electronic scalability	**Yes**
Mechanical scalability	**No**
Radial range	**Ø 10 m (79 m²)**
Tangential range	**Ø 10 m (79 m²)**
Mounting height	**2,00 – 4,00 m**

CONNECTIVITY

Networking	**Yes**
Control technology	**Steinel Connect**
Wireless networking via	**BT SIG Mesh**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**5940 lm**
Colour temperature	**4000 K**
Colour rendering index	**90-100**
Illuminant	**LED cannot be replaced**

LIFETIME

LED lifetime max. °C	**60000 h**
Luminous flux decline per LM80	**L80B10**

SETTINGS

Twilight setting	**2 – 2000 lx**
Time setting	**5 sec – 60 min**
Base light function	**Yes**
Base light function time	**1-60 min**
Main light adjustable	**10 - 100 %**
Functions	**Encrypted communicationPresence functionOrientation lightNeighbouring group functionLight sensorFree selection of the light value in a luminaire groupAdjustable fade time when switching on and offMotions sensorConnection to central battery systems**
With remote control	**Yes**
Base light function in percent	**10 %**
Base light function percent from	**10**

HOUSING & MATERIAL

Impact resistance	**IK07**
Protection class (IP)	**IP66**
Protection class	**II**
Ambient temperature	**-20 – 40 °C**
Housing material	**Plastic**
Cover material	**Plastic, structured**
Material	**Plastic**
Colour	**grey**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**

CERTIFICATES & EPREL

Certificates	**DEKRA**
EPREL category	**Umgebenes Produkt mit integrierter Lichtquelle**


RS PRO 5150 SC mit Bewegungsmelder & Bluetooth Verso

SENSOR-LED-INNENLEUCHTE

Product code **221393**
E-Nr. **941006369**

Illustrations

TECHNICAL DRAWINGS

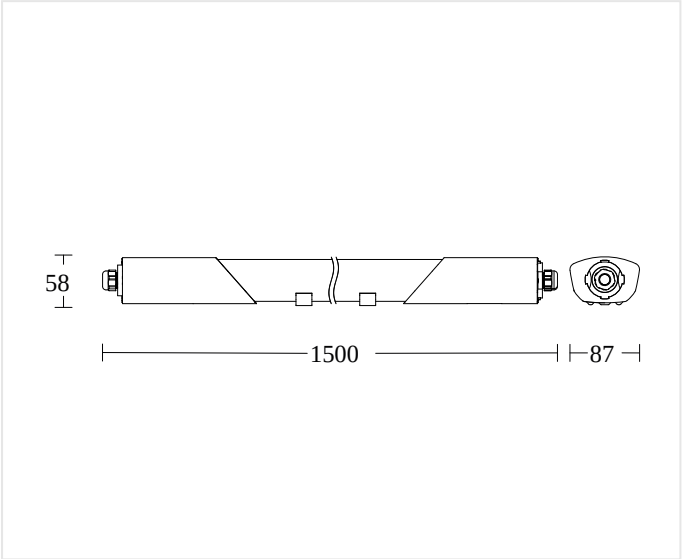

1500 x 87 x 58 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	4,00 m MAX

RS PRO 5150 SC mit Bewegungsmelder & Bluetooth Verso

SENSOR-LED-INNENLEUCHTE

Product code **221393**
E-Nr. **941006369**

Accessories

ORDERING INFORMATION

Art.-Nr.	221393
E-Number	941006369
Typ	**RS PRO 5150 SC mit Bewegungsmelder & Bluetooth Verso**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss