

# Spot Way SC 24V with motion detector & Bluetooth

**neva**  
**lux**

## 24V-GARDEN LED LIGHT

EAN 4007841089320

Your garden. Your light. With the 24V garden lighting system, you can make your outdoor area shine. Simply connect the light, cable and power supply unit and set via the STEINEL Connect app.

- Stylish coloured light accents: Swivelling 24V pathway light without motion detector
- High-quality material: Elegant and puristic design made of durable aluminium
- STEINEL Connect App: Easy configuration and networking of multiple lights via Bluetooth
- True Color: true-to-life color rendering in warm white, cool white and color, dimmable for flexible lighting scenes
- Plug & Play: All components can be connected quickly and without tools, and can be expanded as desired
- Well planned: This light consumes 7,93 W. To operate it, you'll need a 24V power supply that matches the total power requirement – not included.

 **steinel**

140 x 226 x 572 mm



Spot Way SC 24V with motion detector & Bluetooth

24V-GARDEN LED LIGHT

EAN 4007841089320

Technical Data

|                             |  |                    |  |                                              |  |                                                                                                                      |  |                                  |  |                                                 |  |
|-----------------------------|--|--------------------|--|----------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------|--|----------------------------------|--|-------------------------------------------------|--|
| DIMENSIONS                  |  | Colour temperature |  | all colors + 1800-4000 K                     |  | Base light function in percent                                                                                       |  | 10 – 100 %                       |  |                                                 |  |
| Dimensions L × W × H        |  | 140 x 226 x 572 mm |  | LED colour deviation                         |  | SDCM3                                                                                                                |  | Base light function percent from |  | 10 %                                            |  |
| ELECTRICAL                  |  |                    |  | Colour rendering index                       |  | = 90                                                                                                                 |  |                                  |  |                                                 |  |
| Power                       |  | 7,93 W             |  | With illuminant                              |  | Yes, STEINEL LED system                                                                                              |  |                                  |  |                                                 |  |
| SENSOR TECHNOLOGY           |  |                    |  | Illuminant                                   |  | LED cannot be replaced                                                                                               |  |                                  |  |                                                 |  |
| Sensor technology           |  | passive infrared   |  | Soft light start                             |  | Yes                                                                                                                  |  | HOUSING & MATERIAL               |  |                                                 |  |
| With motion detector        |  | Yes                |  | Continuous light                             |  | selectable                                                                                                           |  | Protection class (IP)            |  | IP65                                            |  |
| Detection angle             |  | 90 °               |  | LIFETIME                                     |  |                                                                                                                      |  | Protection class                 |  | III                                             |  |
| Sneak-under protection      |  | No                 |  | LED lifetime L70B50 25°C                     |  | > 60000 h                                                                                                            |  | Ambient temperature              |  | from -20 up to 40 °C                            |  |
| Segment-by-segment masking  |  | No                 |  | Average rated power supply lifetime at 25 °C |  | > 60000 h                                                                                                            |  | Housing material                 |  | Aluminium                                       |  |
| Electronic scalability      |  | No                 |  | SETTINGS                                     |  |                                                                                                                      |  | Cover material                   |  | PC structured                                   |  |
| Mechanical scalability      |  | No                 |  | Twilight setting                             |  | 2 – 2000 lx                                                                                                          |  | Mounting location                |  | Floor                                           |  |
| Radial range                |  | r = 2 m (3 m²)     |  | Time setting                                 |  | 5 s – 60 Min.                                                                                                        |  | Application location             |  | Outdoors                                        |  |
| Tangential range            |  | r = 10 m (79 m²)   |  | Base light function                          |  | Yes                                                                                                                  |  | Mounting type                    |  | Other                                           |  |
| CONNECTIVITY                |  |                    |  | Base light function time                     |  | 5s-60 min                                                                                                            |  | Material                         |  | Aluminium                                       |  |
| Networking                  |  | Yes                |  | Main light adjustable                        |  | 10 - 100 %                                                                                                           |  | Application room                 |  | garden outdoors terrace / balcony               |  |
| Networking via              |  | Bluetooth Mesh     |  | Functions                                    |  | DIM function Motions sensor<br>Color temperature change<br>Light sensor Normal / test mode Push button configuration |  | Colour                           |  | Anthracite                                      |  |
| Slave mode adjustable       |  | Yes                |  | Settings via                                 |  | Bluetooth Mesh                                                                                                       |  | SCOPE OF DELIVERY & WARRANTY     |  |                                                 |  |
| LIGHTING TECHNOLOGY         |  |                    |  | With remote control                          |  | No                                                                                                                   |  | Manufacturer warranty            |  | 3 years                                         |  |
| Measured luminous flux 360° |  | 363 lm             |  | Twilight setting teach                       |  | Yes                                                                                                                  |  | House number sheet included      |  | No                                              |  |
| Efficiency                  |  | 45,8 lm/W          |  |                                              |  |                                                                                                                      |  | CERTIFICATES & EPREL             |  |                                                 |  |
|                             |  |                    |  |                                              |  |                                                                                                                      |  | Certificates                     |  | TSU                                             |  |
|                             |  |                    |  |                                              |  |                                                                                                                      |  | EPREL category                   |  | Surrounded product with integrated light source |  |


# Spot Way SC 24V with motion detector & Bluetooth

EAN 4007841089320

24V-GARDEN LED LIGHT

## Illustrations

### TECHNICAL DRAWINGS

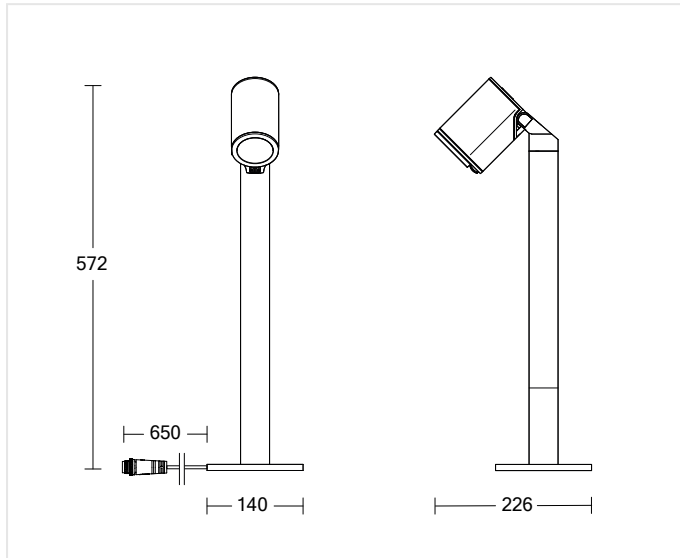

140 x 226 x 572 mm

# Spot Way SC 24V with motion detector & Bluetooth

EAN 4007841089320

24V-GARDEN LED LIGHT

## Highlights

**Plug&Play - Easy to install****True Color****Dimmable lighting****Turns through 180° and tilts through 90°****High-quality aluminium**

Spot Way SC 24V with motion detector & Bluetooth

24V-GARDEN LED LIGHT

EAN 4007841089320

Accessories

|                      |                                                  |
|----------------------|--------------------------------------------------|
| ORDERING INFORMATION |                                                  |
| Art.-Nr.             | 089320                                           |
| EAN                  | 4007841089320                                    |
| Typ                  | Spot Way SC 24V with motion detector & Bluetooth |

|                                                                                                                               |  |
|-------------------------------------------------------------------------------------------------------------------------------|--|
| <div>neva<br/>lux</div> <div>nevalux AG<br/>Neugrütstrasse 2<br/>8610 Uster<br/>+41 44 508 78 78<br/>info@nevalux.swiss</div> |  |
|-------------------------------------------------------------------------------------------------------------------------------|--|