

RS PRO S10 SC Multipack (5 pcs.) PC neutral white

neva
lux**SENSOR-SWITCHED LED INDOOR LIGHT**

EAN 4007841081928

E-Nr. 941349409

 **steinel**

300 x 71 mm



RS PRO S10 SC Multipack (5 pcs.) PC neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081928
E-Nr. 941349409

Technical Data

DIMENSIONS		Slave mode adjustable		Yes	Settings via		App Bluetooth Mesh
Dimensions Ø x H		300 x 71 mm			Twilight setting teach		Yes
ELECTRICAL		LIGHTING TECHNOLOGY			Base light function in percent		7 – 100 %
Mains connection		220 – 240 V / 50 – 60 Hz			Base light function percent from		7 %
Power		9,1 W			HOUSING & MATERIAL		
Own consumption		0,38 W			Impact resistance		IK07
SENSOR TECHNOLOGY		Colour temperature		4000 K	Protection class (IP)		IP20
Max. mounting height		LED colour deviation		SDCM3	Protection class		II
Sensor technology		With illuminant		Yes, STEINEL LED system	Ambient temperature		from -20 up to 40 °C
Transmission power		Illuminant		LED cannot be replaced	Housing material		Aluminium
HF technology		LED cooling system		Passive Thermo Control	Cover material		PC, opal
With motion detector		Soft light start		Yes	Mounting location		ceiling wall
Detection		Continuous light		selectable	Application location		Indoors
Detection angle		SETTINGS			Mounting type		Surface wiring
Opening angle		Twilight switch		Yes	Application room		Indoors corridor / aisle function room / ancillary room multi-storey / underground car park reception / lobby
Electronic scalability		Twilight setting		2 – 2000 lx	Colour		white
Radial range		Time setting		5 s – 60 Min.	SCOPE OF DELIVERY & WARRANTY		
Tangential range		Base light function		Yes	Manufacturer warranty		5 years
Mounting height		Base light function detail		LED effect light	CERTIFICATES & EPREL		
Optimal mounting height		Base light function time		1-60 min	EPREL category		Surrounded product with integrated light source
CONNECTIVITY		Main light adjustable		Yes			
Networking		Functions		Motions sensor Adjustable fade time when switching on and off DIM function Free selection of the light value in a luminaire group Group parameterisation Semi-/fully automatic Light sensor Neighbouring group function Normal / test mode Orientation light Presence detector logic Encrypted communication			
Networking via							


RS PRO S10 SC Multipack (5 pcs.) PC neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081928
E-Nr. 941349409

Illustrations

TECHNICAL DRAWINGS

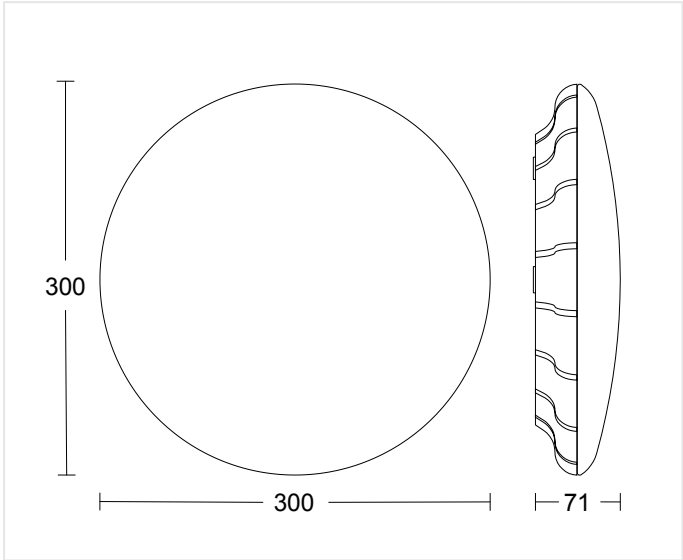

300 x 71 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------

RS PRO S10 SC Multipack (5 pcs.) PC neutral white


EAN 4007841081928

SENSOR-SWITCHED LED INDOOR LIGHT

E-Nr. 941349409


Wiring Diagrams

WIRING DIAGRAM 1

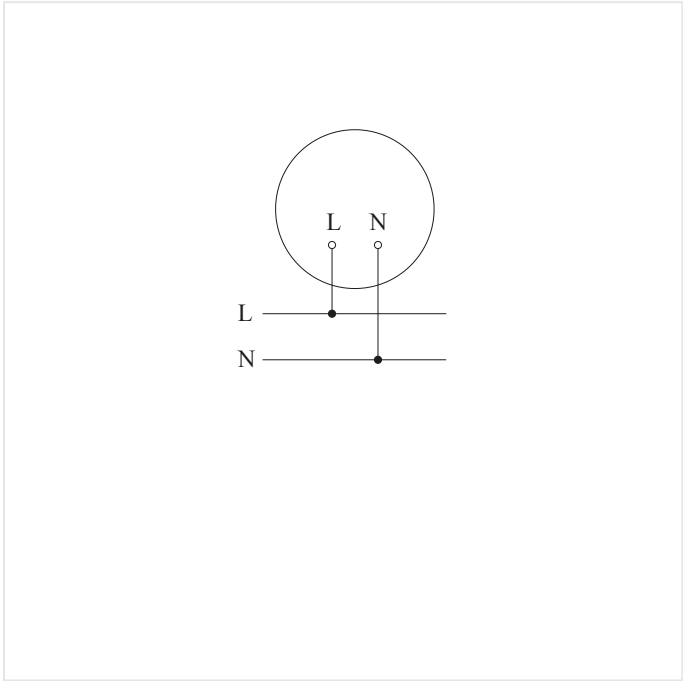

Slave/wireless master interconnection circuit diagram

WIRING DIAGRAM 2

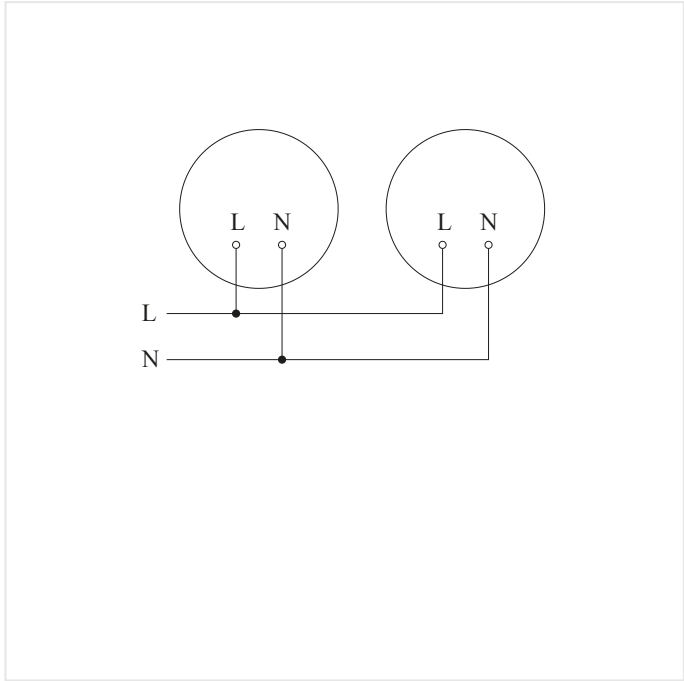

Master/master interconnection circuit diagram


RS PRO S10 SC Multipack (5 pcs.) PC neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081928

E-Nr. 941349409

Highlights

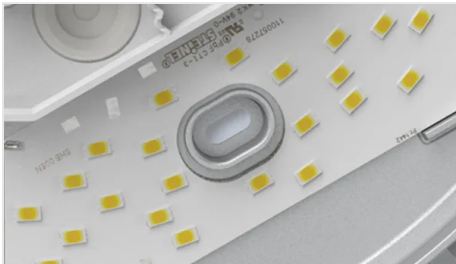


Including STEINEL LED system



Intelligent LED cooling system



Optional basic lighting level 10 %

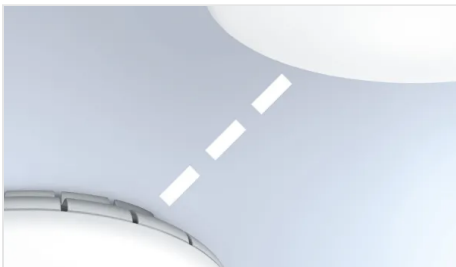

Interconnectable and adjustable via
Bluetooth



High-quality aluminium

RS PRO S10 SC Multipack (5 pcs.) PC neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081928
E-Nr. 941349409

Accessories

ORDERING INFORMATION	
Art.-Nr.	081928
EAN	4007841081928
E-Number	941349409
Typ	RS PRO S10 SC Multipack (5 pcs.) PC neutral white
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	