# NightmatIQ Anthracite

**PHOTO-CELL-CONTROLLED LIGHT**

EAN 4007841087586

- Control unit with light sensor for automatic night-time illumination of advertising structures
- Straightforward, flat design made of UV-resistant material
- 0-10V or PWM switchable
- Brightness-dependent dimming and switching: the darker, the more dimming
- Time-dependent switching
- Setting via Steinel Connect app

steinel

38 x 95 x 95 mm



# NightmatIQ Anthracite

**PHOTO-CELL-CONTROLLED LIGHT**

EAN **4007841087586**

# Technical Data

### IDENTIFICATION

| | |
|---|---|
| Version | **Photo-cell controller** |

### DIMENSIONS

| | |
|---|---|
| Dimensions L × W × H | **38 x 95 x 95 mm** |

### ELECTRICAL

| | |
|---|---|
| Mains connection | **220 – 240 V / 50 – 60 Hz** |

### SENSOR TECHNOLOGY

| | |
|---|---|
| With motion detector | **No** |

### CONNECTIVITY

| | |
|---|---|
| Networking | **Yes** |
| Type of networking | **Master/master** |
| Control technology | **On/Off-Leuchte** |

### LIGHTING TECHNOLOGY

| | |
|---|---|
| Soft light start | **Yes** |
| Continuous light | **selectable** |
| Constant light regulation | **No** |

### SETTINGS

| | |
|---|---|
| Twilight switch | **Yes** |
| Twilight setting | **2 – 2000 lx** |
| Base light function | **No** |
| Main light adjustable | **0 - 100 %** |
| Functions | **Light sensor Neighbouring group function Night economy mode Push button configuration Timer Dimmkurve individuell einstellbar Adjustable fade time when switching on and off Lighting scenario Normal / test mode Umschaltbar zwischen 0-10V und PWM** |
| Settings via | **Bluetooth Mesh App Tablet Smartphone** |
| With remote control | **No** |
| Twilight setting teach | **Yes** |

### HOUSING & MATERIAL

| | |
|---|---|
| Protection class (IP) | **IP54** |
| Housing material | **Plastic** |
| Mounting location | **wall** |
| Application location | **Outdoors** |
| Mounting type | **Surface wiring** |
| Material | **Plastic** |
| Application room | **Indoors all round the building courtyard & driveway front door outdoors terrace / balcony** |
| Colour | **Anthracite** |

### SCOPE OF DELIVERY & WARRANTY

| | |
|---|---|
| Manufacturer warranty | **5 years** |
| Corner wall bracket included | **No** |


# NightmatIQ Anthracite

**PHOTO-CELL-CONTROLLED LIGHT**

EAN 4007841087586

## Illustrations

### TECHNICAL DRAWINGS

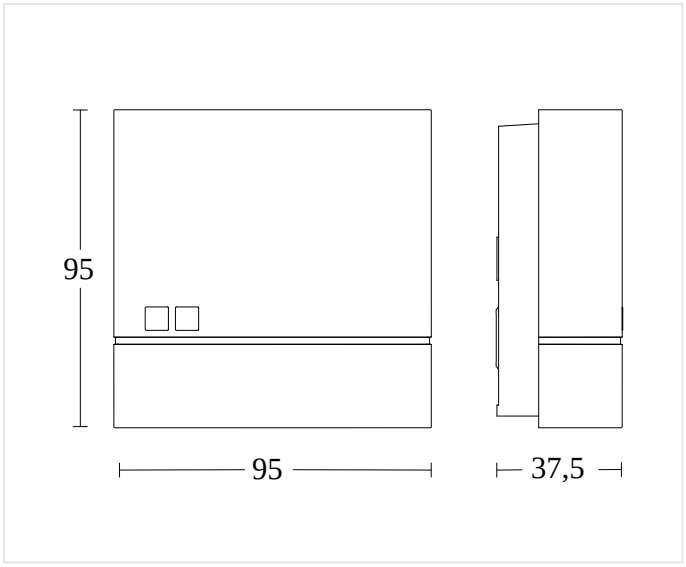


38 x 95 x 95 mm


# NightmatIQ Anthracite

**PHOTO-CELL-CONTROLLED LIGHT**

EAN 4007841087586

# Wiring Diagrams

### WIRING DIAGRAM 1

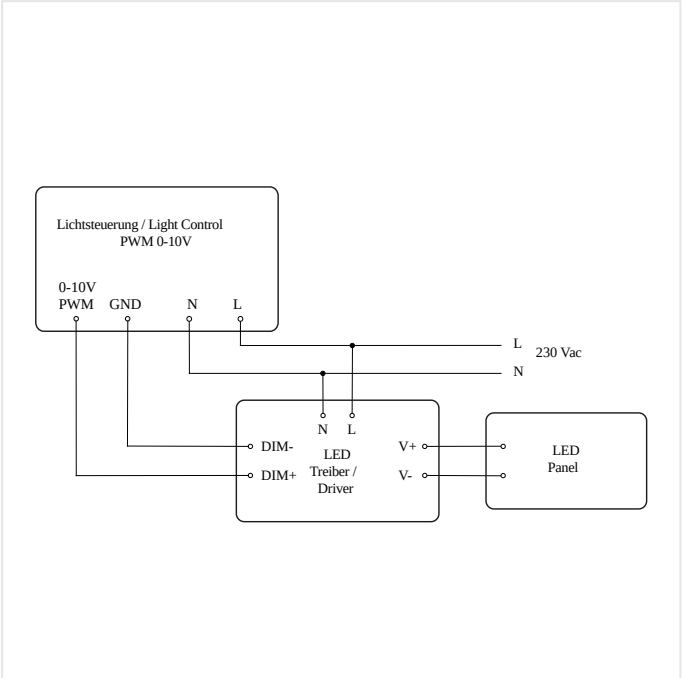


Circuit diagram

# NightmatIQ Anthracite

**PHOTO-CELL-CONTROLLED LIGHT**

EAN **4007841087586**

## Accessories

**ORDERING INFORMATION**

| | |
|---|---|
| Art.-Nr. | 087586 |
| EAN | 4007841087586 |
| Typ | **NightmatIQ Anthracite** |

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss