

IS 3360 DALI-2 APC - surface, rd.

PRESENCE DETECTOR

neva
lux

EAN 4007841033507

E-Nr. 535943006

● steinel

126 x 65 mm



IS 3360 DALI-2 APC - surface, rd.

PRESENCE DETECTOR

EAN 4007841033507

E-Nr. 535943006

Technical Data

IDENTIFICATION		Presence range		Ø 3 m (7 m²)		Base light function in percent		10 – 50 %					
Version	Motion and Presence Detector	Optimal mounting height		2,8 m		Base light function percent from		10 %					
DIMENSIONS		CONNECTIVITY		HOUSING & MATERIAL									
Dimensions Ø × H		Networking		Yes		Protection class (IP)		IP54					
		Type of networking		Master/slave		Ambient temperature		from -20 up to 50 °C					
		Networking via		Cable		Mounting location		ceiling					
ELECTRICAL		LIGHTING TECHNOLOGY		Application location		Indoors Outdoors							
Mains connection		220 – 240 V / 50 – 60 Hz		Soft light start		Yes		Mounting type		Surface wiring			
Control output DALI		Broadcast 1x30 electronic ballasts		Continuous light		selectable, 4h		Material		Plastic			
SENSOR TECHNOLOGY		SETTINGS		Application room		Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park outdoors production facilities reception / lobby recreation room sports hall stairwell warehouse							
Max. mounting height		4,00 m		Twilight switch		Yes		Colour		white			
Sensor technology		passive infrared		Twilight setting		2 – 1000 lx		RAL colour		9003			
With motion detector		Yes		Time setting		5 s – 15 Min.		SCOPE OF DELIVERY & WARRANTY					
Detection angle		360 °		Base light function		Yes		Manufacturer warranty		5 years			
Opening angle		180 °		Base light function time		1-30 min all night		Corner wall bracket included		No			
Sneak-under protection		Yes		Main light adjustable		50 - 100 %		CERTIFICATES & EPREL					
Segment-by-segment masking		Yes		Functions		Normal / test mode Manual ON / ON-OFF Constant-lighting control ON-OFF		Certificates				DALI-2	
Electronic scalability		No		Settings via		Remote control Potentiometers Smart Remote							
Mechanical scalability		No		With remote control		No							
Radial range		Ø 8 m (50 m²)		Twilight setting teach		Yes							
Tangential range		Ø 40 m (1257 m²)											
Switching zones		1416 switching zones											
Mounting height		2,50 – 4,00 m											


IS 3360 DALI-2 APC - surface, rd.

PRESENCE DETECTOR

EAN 4007841033507
E-Nr. 535943006

Illustrations

TECHNICAL DRAWINGS

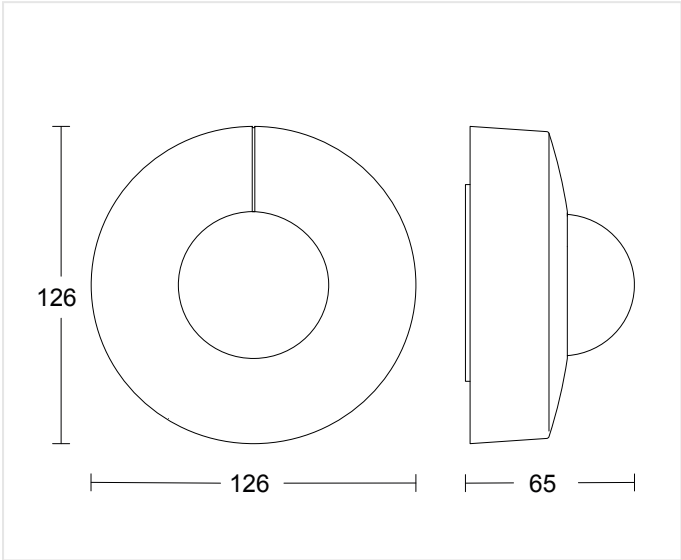

126 x 65 mm

MOUNTING HEIGHT


2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

IS 3360 DALI-2 APC - surface, rd.
PRESENCE DETECTOR

EAN 4007841033507
E-Nr. 535943006


Wiring Diagrams

WIRING DIAGRAM 1

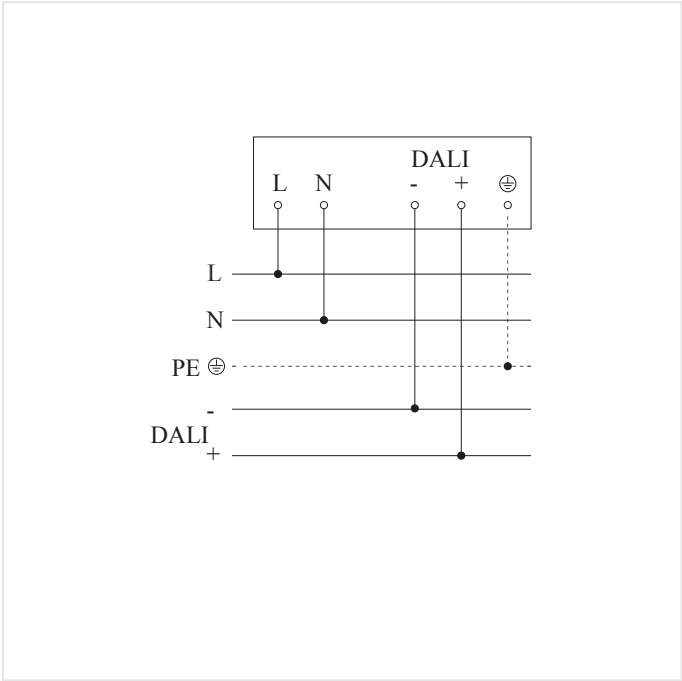

Master circuit diagram

WIRING DIAGRAM 2

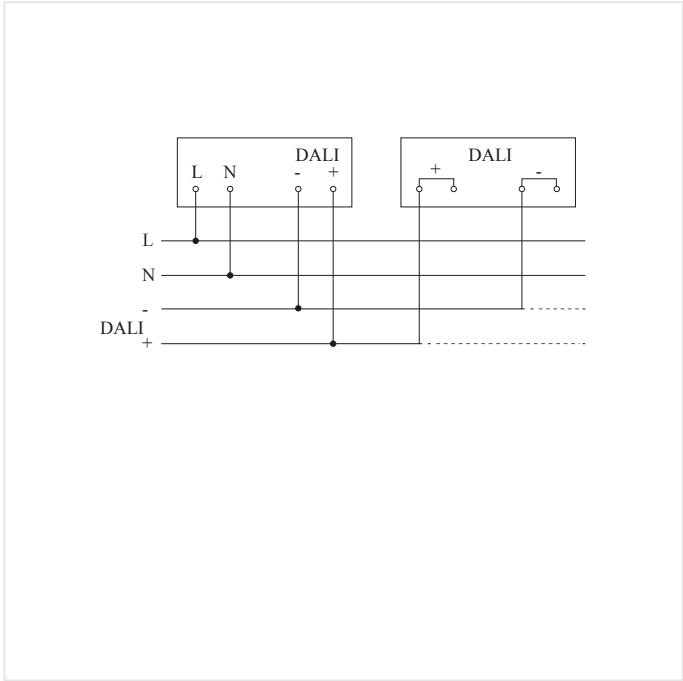

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IS 3360 DALI-2 APC - surface, rd.

PRESENCE DETECTOR


EAN 4007841033507

E-Nr. 535943006

Highlights



UV-resistant plastic

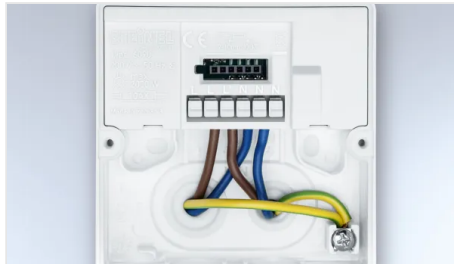

Large terminal compartment



Optional remote controls

IS 3360 DALI-2 APC - surface, rd.

PRESENCE DETECTOR

EAN 4007841033507
E-Nr. 535943006

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

033507

EAN

4007841033507

E-Number

535943006

Typ

IS 3360 DALI-2 APC - surface, rd.

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss