

RS PRO A30 SC warm white white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841088354

E-Nr. 941600839

- Ideal for demanding environments such as pergolas or similar applications
- Non-visible high-frequency sensor with ø8 m range, 3000 K, 2534 lm, 20,7 W, 122,4 lm/W
- Robust aluminium housing with high impact resistance IK10 and protection class IP54
- Simple networking via Bluetooth Mesh Connect and commissioning via STEINEL Connect app
- Benefits of the Connected Lighting System and cross-range networking possible
- With plug-in terminals for easy installation

 **steinel**

331 x 69 mm



RS PRO A30 SC warm white white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841088354

E-Nr. 941600839

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY			
Dimensions Ø x H	331 x 69 mm	Measured luminous flux 360°	2534 lm	With remote control	No
ELECTRICAL		Colour temperature	3000 K	Twilight setting teach	Yes
Mains connection	220 – 240 V / 50 – 60 Hz	LED colour deviation	SDCM3	Base light function in percent	0 – 100 %
Power	20,7 W	With illuminant	Yes, STEINEL LED system	Base light function percent from	0 %
SENSOR TECHNOLOGY		Illuminant	LED cannot be replaced	HOUSING & MATERIAL	
Max. mounting height	4,00 m	Base	without	Impact resistance	IK10
Sensor technology	High frequency	LED cooling system	Passive Thermo Control	Protection class (IP)	IP54
Transmission power	< 1 mW	Soft light start	Yes	Protection class	II
HF technology	5,8 GHz	Continuous light	selectable	Ambient temperature	from -20 up to 40 °C
With motion detector	Yes	Efficiency without cover	158,89 lm/W	Housing material	Aluminium
Detection	also through glass, wood and stud walls	LIFETIME		Cover material	PC, opal
Detection angle	360 °	LED lifetime L70B50 25°C	> 60000 h	Mounting location	ceiling wall
Opening angle	160 °	SETTINGS		Application location	Indoors
Segment-by-segment masking	No	Twilight switch	Yes	Mounting type	Surface wiring
Electronic scalability	Yes	Twilight setting	2 – 2000 lx	Application room	WC / washroom changing room corridor / aisle function room / ancillary room kitchenette stairwell warehouse
Mechanical scalability	No	Time setting	10 s – 60 Min.		
Radial range	Ø 8 m (50 m²)	Base light function	Yes	Colour	white
Tangential range	Ø 8 m (50 m²)	Base light function time	1-60 min	SCOPE OF DELIVERY & WARRANTY	
Mounting height	2,00 – 4,00 m	Main light adjustable	0 - 100 %	Manufacturer warranty	5 years
Optimal mounting height	2,8 m	Functions	Selecting programmed lighting scenarios Motions sensor DIM function Adjustable fade time when switching on and off Semi-/fully automatic Neighbouring group function Encrypted communication Timer	House number sheet included	No
CONNECTIVITY		Settings via	Bluetooth App	CERTIFICATES & EPREL	
Networking	Yes			EPREL category	Surrounded product with integrated light source
Type of networking	Master/master				
Networking via	Bluetooth Mesh				
Slave mode adjustable	Yes				

RS PRO A30 SC warm white white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841088354

E-Nr. 941600839

Illustrations

TECHNICAL DRAWINGS

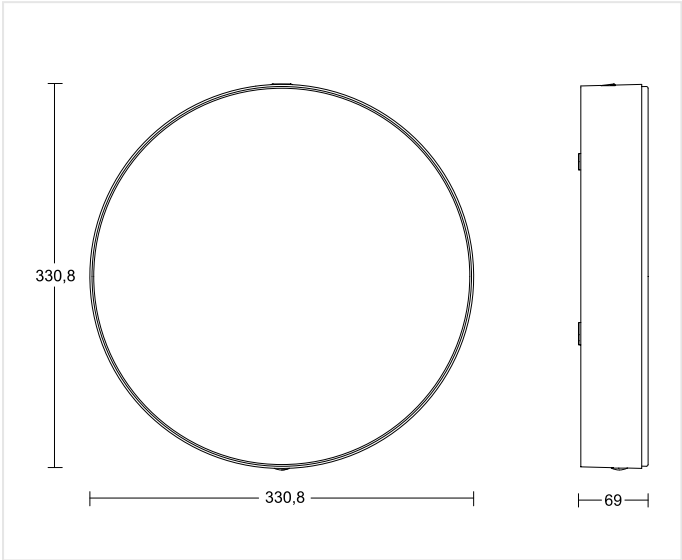

331 x 69 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

RS PRO A30 SC warm white white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841088354
E-Nr. 941600839

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221386	Universal P-Set 3S	Suspension cable

ORDERING INFORMATION

Art.-Nr.

088354

EAN

4007841088354

E-Number

941600839

Typ

RS PRO A30 SC warm white white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss