

# XLED PRO Expanse without motion detector - anthracite

neva  
lux

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841091224

E-Nr. 941463409

- Wide-angle panoramic illumination thanks to three powerful LED light surfaces
- Ideal for courtyards and driveways
- High light output with 1642 lm and 13,6 W in warm white light (3000 K)
- Flexibly adjustable: spotlight can be fully rotated, tilted and locked in place
- Robust construction with IP54 protection and IK03 impact resistance
- Corner wall brackets available as an option

● steinel

195 x 195 x 174 mm



XLED PRO Expanse without motion detector - anthracite

EAN 4007841091224  
E-Nr. 941463409

LED FLOODLIGHT WITHOUT SENSOR

Technical Data

|                             |                          |                          |  |                      |                               |                                                                                                                |
|-----------------------------|--------------------------|--------------------------|--|----------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------|
| DIMENSIONS                  |                          | With illuminant          |  | Yes, LED lamp        | Mounting type                 | Surface wiring                                                                                                 |
| Dimensions L x W x H        | 195 x 195 x 174 mm       | Soft light start         |  | No                   | Material                      | Plastic                                                                                                        |
| ELECTRICAL                  |                          | LIFETIME                 |  |                      | Application room              | all round the building<br>courtyard & driveway front<br>door garden sports hall<br>terrace / balcony warehouse |
| Mains connection            | 220 – 240 V / 50 – 60 Hz | LED lifetime L70B50 25°C |  | > 60000 h            | Colour                        | Anthracite                                                                                                     |
| Power                       | 13,6 W                   | SETTINGS                 |  |                      | SCOPE OF DELIVERY & WARRANTY  |                                                                                                                |
| CONNECTIVITY                |                          | Base light function      |  | No                   | Manufacturer warranty         | 5 years                                                                                                        |
| Networking                  | Yes                      | HOUSING & MATERIAL       |  |                      | Corner wall bracket included  | No                                                                                                             |
| Type of networking          | Sensor/slave             | Impact resistance        |  | IK03                 | CERTIFICATES & EPREL          |                                                                                                                |
| Networking via              | Cable                    | Protection class (IP)    |  | IP54                 | Certificates                  | DEKRA                                                                                                          |
| LIGHTING TECHNOLOGY         |                          | Protection class         |  | II                   | EPREL energy efficiency class | E                                                                                                              |
| Measured luminous flux 360° | 1642 lm                  | Ambient temperature      |  | from -20 up to 40 °C | EPREL category                | Light source                                                                                                   |
| Colour temperature          | 3000 K                   | Housing material         |  | Polycarbonate        |                               |                                                                                                                |
| Colour rendering index      | = 82                     | Mounting location        |  | wall                 |                               |                                                                                                                |
|                             |                          | Application location     |  | Outdoors             |                               |                                                                                                                |

# XLED PRO Expance without motion detector - anthracite


EAN 4007841091224

E-Nr. 941463409

LED FLOODLIGHT WITHOUT SENSOR

## Illustrations

### TECHNICAL DRAWINGS

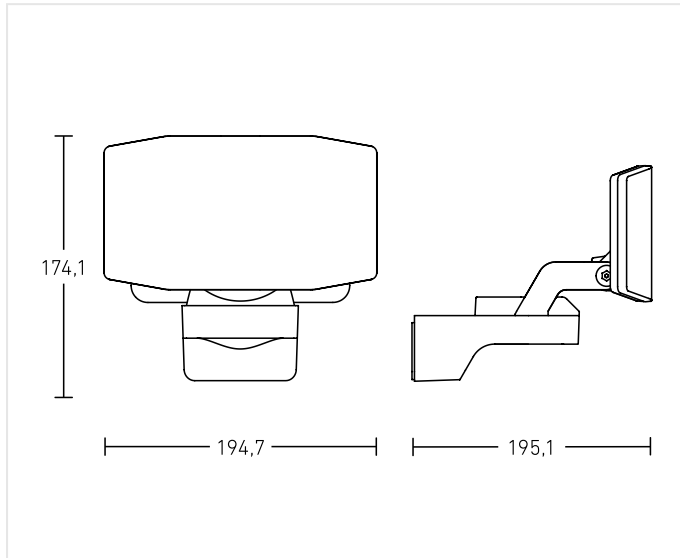

195 x 195 x 174 mm

# XLED PRO Expance without motion detector - anthracite


EAN 4007841091224

E-Nr. 941463409

LED FLOODLIGHT WITHOUT SENSOR

## Wiring Diagrams

### WIRING DIAGRAM 1

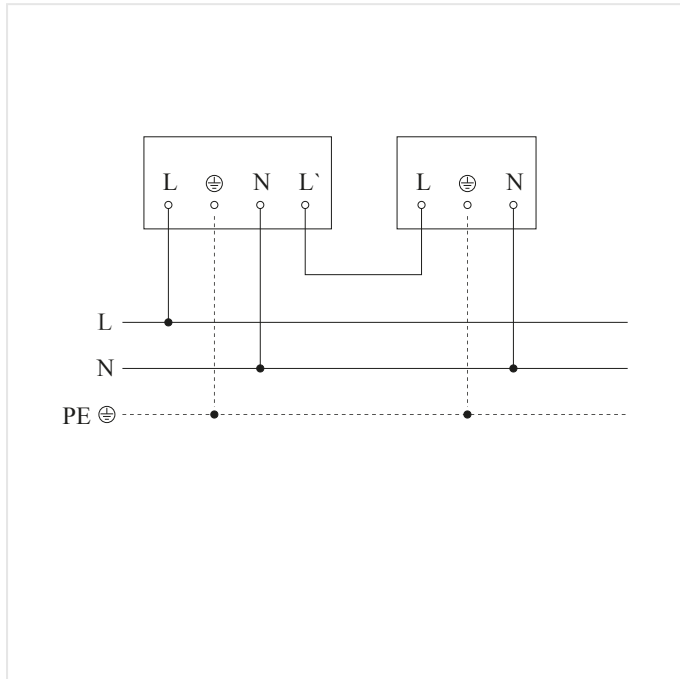

Master/slave interconnection circuit diagram

# XLED PRO Expanse without motion detector - anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841091224

E-Nr. 941463409

## Accessories

### ORDERING INFORMATION

Art.-Nr. 091224

EAN 4007841091224

E-Number 941463409

Typ XLED PRO Expanse without motion detector - anthracite

**neva**  
**lux**

nevalux AG  
Neugrütstrasse 2  
8610 Uster  
+41 44 508 78 78  
info@nevalux.swiss