RS PRO P1 FLAT SP neutral white

LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED

EAN 221817

- Including STEINEL LED system
- Intelligent soft light start
- Interconnectable by cable (maximum of 10 units)

272 x 64 mm



RS PRO P1 FLAT SP neutral white

LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED

EAN **221817**

Technical Data

IDENTIFICATION

Variant	**P1 flat**

DIMENSIONS

Dimensions Ø × H	**272 x 64 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**8,2 W**

SENSOR TECHNOLOGY

With motion detector	**No**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**930 lm**
Colour temperature	**4000 K**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
Base	**without**
LED cooling system	**Passive Thermo Control**
Soft light start	**Yes**

LIFETIME

LED lifetime max. °C	**60000 h**
LED lifetime L70B50 25°C	**> 60000 h**
Luminous flux decline per LM80	**L80B10**

SETTINGS

Main light adjustable	**No**

HOUSING & MATERIAL

Impact resistance	**IK03**
Protection class (IP)	**IP54**
Protection class	**II**
Ambient temperature	**from -10 up to 40 °C**
Housing material	**Plastic**
Cover material	**Plastic, opal**
Mounting location	**ceiling wall**
Colour	**white**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**

CERTIFICATES & EPREL

Certificates	**DEKRA**
EPREL category	**Surrounded product with integrated light source**


RS PRO P1 FLAT SP neutral white

EAN 221817

LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED

Illustrations

TECHNICAL DRAWINGS

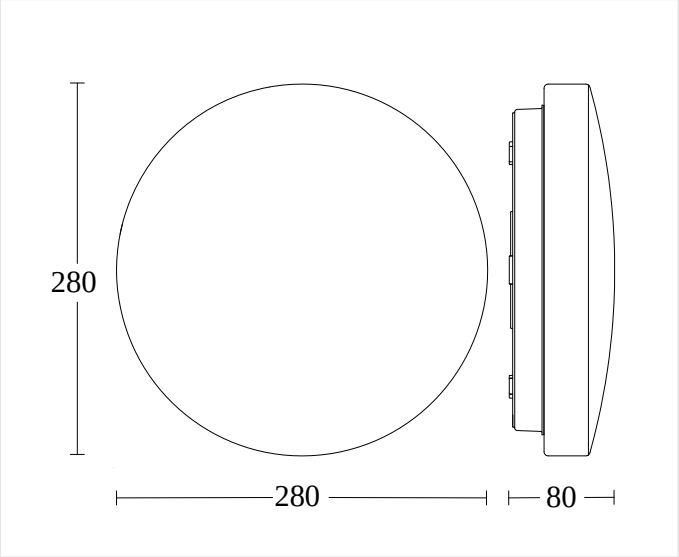

272 x 64 mm


RS PRO P1 FLAT SP neutral white

LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED

EAN 221817


Wiring Diagrams

WIRING DIAGRAM 1

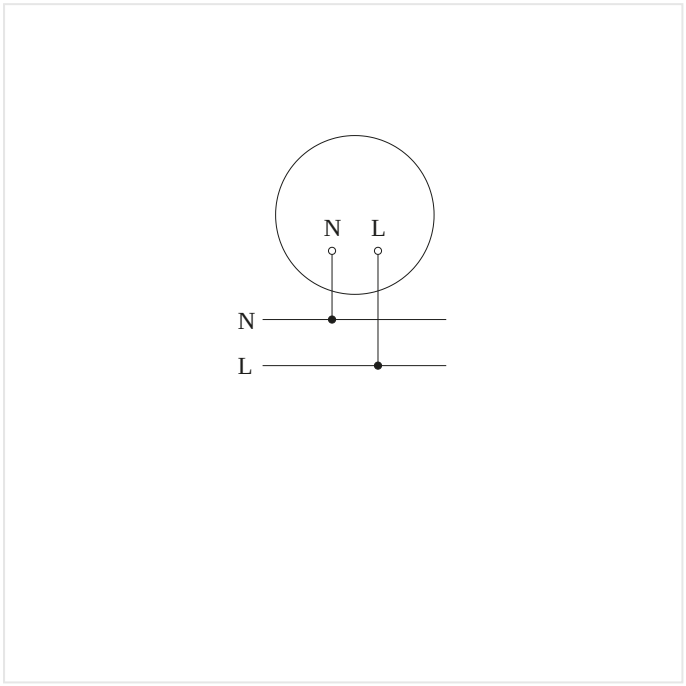

Master circuit diagram

WIRING DIAGRAM 2

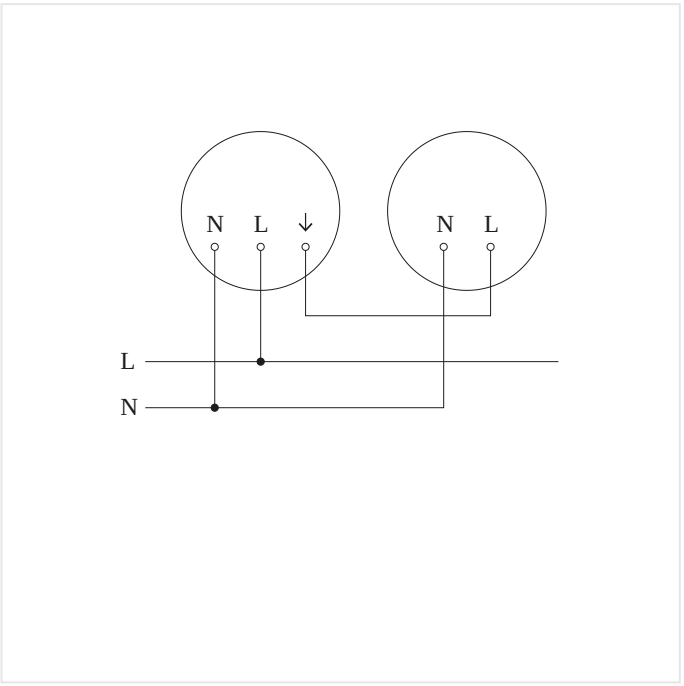

Master/slave interconnection circuit diagram

RS PRO P1 FLAT SP neutral white

LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED

EAN **221817**

Accessories

ORDERING INFORMATION

Art.-Nr.	221817
EAN	221817
Typ	**RS PRO P1 FLAT SP neutral white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss