

PD IR 4360-24 DALI-2 Input Device - concealed white

neva
lux**MOTION AND PRESENCE DETECTOR**

EAN 4007841085827

E-Nr. 535900068

- Our series for the common ranges
- Presence detector with 24 m motion detection and 7.5 m presence detection for integration into a DALI-2 lighting management system
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Transmission of presence and brightness value information to a DALI-2 Application Controller or a BMS
- External approval and measurement in accordance with sensNORM and DALI-2 certified according to IEC 62386

● steinel

109 x 74 mm



PD IR 4360-24 DALI-2 Input Device - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841085827
E-Nr. 535900068

Technical Data

IDENTIFICATION	
Version	Motion and Presence Detector
DIMENSIONS	
Dimensions L x W x H	74 x 109 x 109 mm
Dimensions Ø x H	109 x 74 mm
ELECTRICAL	
Supply voltage detail	DALI bus
SENSOR TECHNOLOGY	
Max. mounting height	10,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	Ø 5.5 m (24 m²)

Tangential range	Ø 24 m (452 m²)
Switching zones	1436 switching zones
Mounting height	2 – 10,00 m
Presence range	Ø 7.5 m (44 m²)
Optimal mounting height	2,8 m
CONNECTIVITY	
Type of networking	Master/master
Networking via	Cable
With bus coupler	Yes
SETTINGS	
Functions	Motions sensor Light sensor Presence function Presence detector logic
Settings via	Bus
With remote control	No
Twilight setting teach	No
HOUSING & MATERIAL	
Protection class (IP)	IP20

Ambient temperature	from -20 up to 50 °C
Housing material	Plastic
Cover material	Other
Cover material (scope of delivery)	shrouds
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors function room / ancillary room one-person office warehouse
Colour	white
RAL colour	9010
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
Certificates	DALI-2

PD IR 4360-24 DALI-2 Input Device - concealed white


MOTION AND PRESENCE DETECTOR

EAN 4007841085827

E-Nr. 535900068

Illustrations

TECHNICAL DRAWINGS

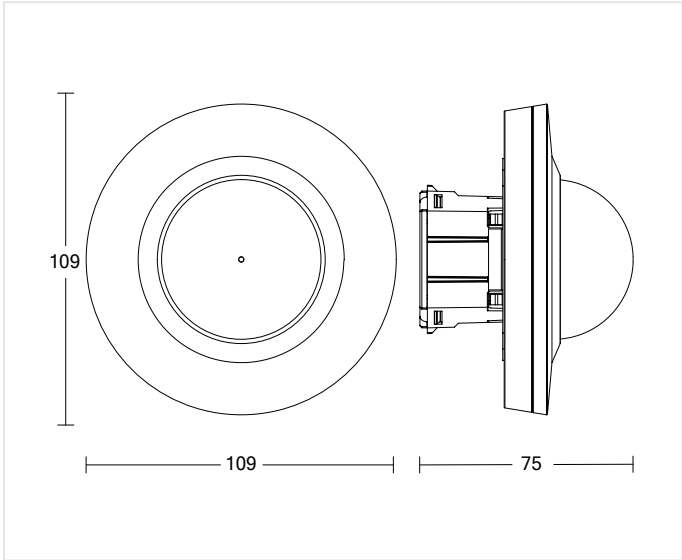

109 x 74 mm

MOUNTING HEIGHT

2 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
---	-------------------------------------	-----------------------------------

PD IR 4360-24 DALI-2 Input Device - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841085827
E-Nr. 535900068


Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram

WIRING DIAGRAM 2

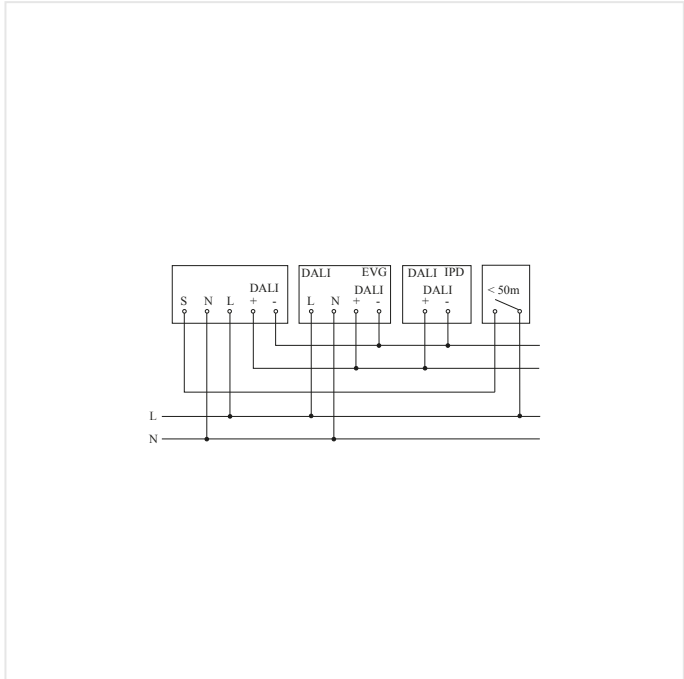

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

PD IR 4360-24 DALI-2 Input Device - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841085827
E-Nr. 535900068

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

085827

EAN

4007841085827

E-Number

535900068

Typ

PD IR 4360-24 DALI-2 Input Device - concealed white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss