
XSolar GL-S white

SOLAR LIGHT

EAN 4007841671204
E-Nr. 924808000

- High-quality monocrystalline solar panel
- Including 2500 mAh lithium iron-phosphate rechargeable battery
- Including STEINEL LED system
- Optional basic lighting level
- Compass for setting the panel to face the optimum direction

188 x 194 x 1178 mm

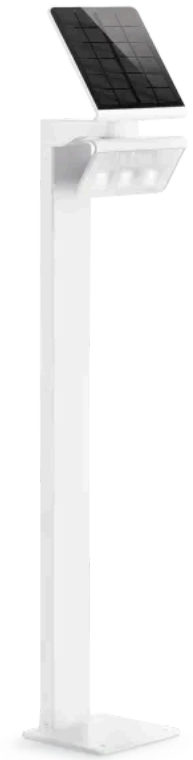

XSolar GL-S white

SOLAR LIGHT

EAN **4007841671204**
E-Nr. **924808000**

Technical Data

IDENTIFICATION

Variant	**white**

DIMENSIONS

Dimensions L × W × H	**188 x 194 x 1178 mm**

ELECTRICAL

Power	**1,2 W**
Supply voltage detail	**Solar supply, no mains power required, Lithium-iron-phosphate rechargeable battery 2500 mAh**

SENSOR TECHNOLOGY

Sensor technology	**passive infrared**
With motion detector	**Yes**
Detection angle	**140 °**
Sneak-under protection	**Yes**
Tangential range	**r = 5 m (31 m²)**

CONNECTIVITY

Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Colour temperature	**4000 K**
LED colour deviation	**SDCM5**
Colour rendering index	**80-89**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
LED cooling system	**Passive Thermo Control**
Luminous flux	**150 lm**

LIFETIME

LED lifetime max. °C	**50000 h**
Luminous flux decline per LM80	**L70B10**

SETTINGS

Twilight switch	**Yes**
Time setting	**10 sec – 0,5 min**

HOUSING & MATERIAL

Protection class (IP)	**IP44**
Protection class	**III**
Housing material	**Aluminium**
Cover material	**Plastic, transparent**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**3 years**

XSolar GL-S white

SOLAR LIGHT

EAN **4007841671204**
E-Nr. **924808000**

Accessories

ORDERING INFORMATION

Art.-Nr.	4007841671204
EAN	4007841671204
E-Number	924808000
Typ	**XSolar GL-S white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss