Relais REL5A-DALI-2

SYSTEM COMPONENTS

EAN 4007841082109

- Integration into DALI-2 installations
- For controlling loads with 230 V AC mains voltage, such as conventional lights without DALI, e.g. panel lights
- Switching of up to 300 W LED
- Compatible with all sensors of the DALI-APC interface of each series
- Simple installation in standard flush-mounted boxes

steinel

20 x 46 x 45 mm



Relais REL5A-DALI-2

SYSTEM COMPONENTS

EAN 4007841082109

Technical Data

IDENTIFICATION

Version	Other
Type of accessory	Other

DIMENSIONS

Dimensions L × W × H	20 x 46 x 45 mm

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Switching output 1 resistive	1000 W
LED lamps > 8 W	300 W
Capacitive load in µF	176 µF
Switching output 1 number of LED/fluorescent lamps	50 pcs.

SENSOR TECHNOLOGY

With motion detector	No
Sneak-under protection	No
Segment-by-segment masking	No
Mechanical scalability	No

CONNECTIVITY

Number of DALI participants	1
With bus coupler	No
Control technology	On/Off-Leuchte

LIGHTING TECHNOLOGY

Soft light start	No
Constant light regulation	No

SETTINGS

Twilight switch	No
Base light function	No
Main light adjustable	No
Functions	Relay output
Settings via	App Bus
With remote control	No
Twilight setting teach	No

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting type	Concealed wiring
Colour	white

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

CERTIFICATES & EPREL

Certificates	DALI-2 TÜV


Relais REL5A-DALI-2

EAN 4007841082109

SYSTEM COMPONENTS

Illustrations

TECHNICAL DRAWINGS

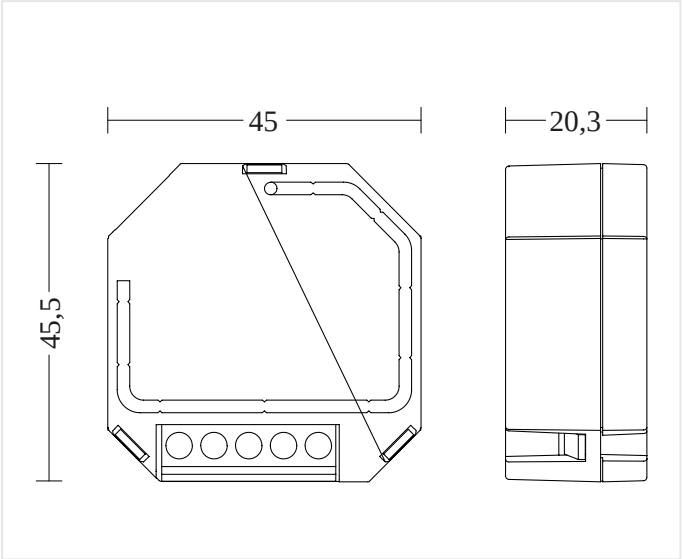

20 x 46 x 45 mm


Relais REL5A-DALI-2

EAN 4007841082109

SYSTEM COMPONENTS

Wiring Diagrams

WIRING DIAGRAM 1

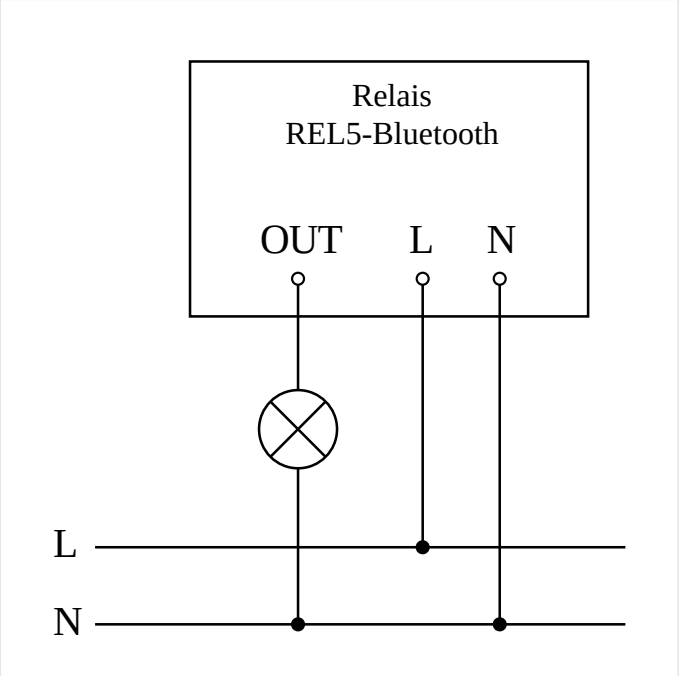

Relais REL5A-DALI-2

EAN 4007841082109

SYSTEM COMPONENTS

Accessories

ORDERING INFORMATION

Art.-Nr.	082109
EAN	4007841082109
Typ	**Relais REL5A-DALI-2**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss