

XLED home 2 XL S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841030056

E-Num. 924700184

- Spotlight with motion detector and fully swivelling LED panel in elegant opal look, ideal for illuminating larger areas such as driveways, patios or gardens
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Optional corner wall bracket available for reliable and uninterrupted monitoring of an area in front of two house walls
- Warm white light (3000 K) and long-life 19,3 W LEDs with 2124 lm, with an illumination of over 300 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

 **steinel**

161 x 180 x 240 mm



XLED home 2 XL S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030056

E-Nr. 924700184

Technical Data

DIMENSIONS

Dimensions L x W x H161 x 180 x 240 mm

ELECTRICAL

Mains connection220 – 240 V / 50 – 60 Hz

Power19,3 W

SENSOR TECHNOLOGY

Max. mounting height4,00 m

Sensor technologypassive infrared

With motion detectorYes

Detection angle180 °

Sneak-under protectionYes

Segment-by-segment maskingYes

Electronic scalabilityNo

Mechanical scalabilityNo

Radial range r = 5 m (39 m²)

Tangential range r = 10 m (157 m²)

Mounting height1,8 – 4 m

Optimal mounting height2 m

CONNECTIVITY

NetworkingNo

LIGHTING TECHNOLOGY

Measured luminous flux360°2124 lm

Colour temperature3000 K

LED colour deviationSDCM3

Colour rendering index80-89

With illuminantYes, STEINEL LED system

IlluminantLED cannot be replaced

Basewithout

LED cooling systemHCMC (High Conductive Magnesium Composite)

LIFETIME

LED lifetime max. °C50000 h

Luminous flux decline per LM80L70B10

SETTINGS

Twilight switchYes

Twilight setting2 – 2000 lx

Time setting8 s – 35 Min.

Base light functionNo

Main light adjustableNo

Settings viaPotentiometers

Twilight setting teachNo

HOUSING & MATERIAL

Protection class (IP)IP44

Protection classII

Ambient temperaturefrom -20 up to 40 °C

Housing materialPlastic

Cover materialPlastic, opal

Cover material (scope of delivery)sticker

Mounting locationcorner wall

Application locationOutdoors

Mounting typeSurface wiring

Application roomall round the building courtyard & driveway outdoors terrace / balcony

ColourAnthracite

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty5 years

CERTIFICATES & EPREL

EPREL energy efficiency classE

EPREL categoryLight source


XLED home 2 XL S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030056
E-Nr. 924700184

Illustrations

TECHNICAL DRAWINGS

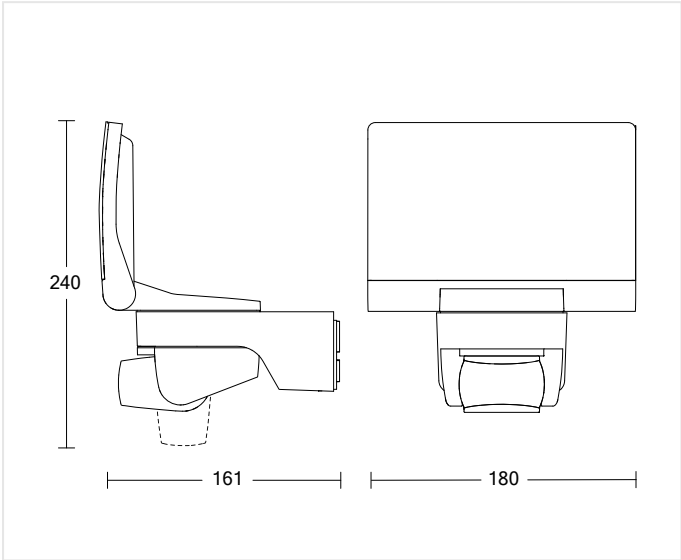

161 x 180 x 240 mm

MOUNTING HEIGHT

1,8 – 4 m BEREICH	2 m OPTIMAL	4,00 m MAX
----------------------	----------------	---------------

XLED home 2 XL S Anthracite


SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030056

E-Nr. 924700184

Wiring Diagrams

WIRING DIAGRAM 1

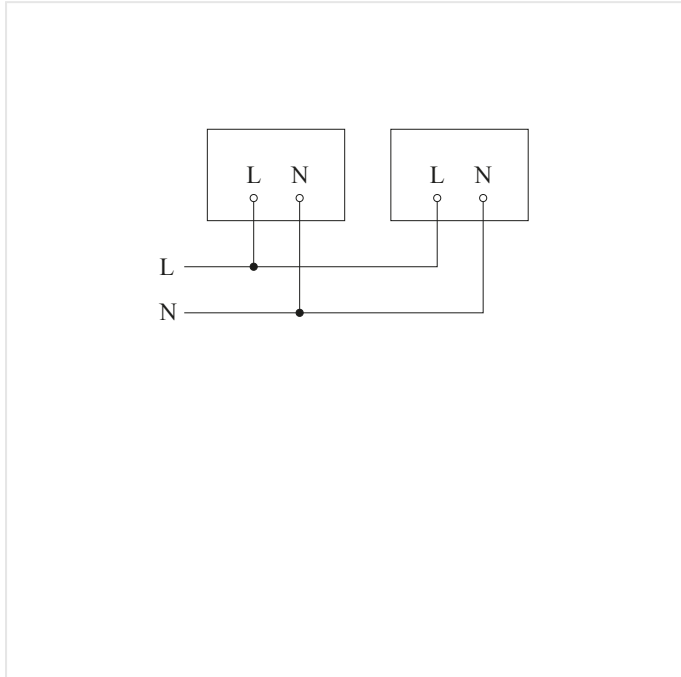

Circuit diagram


XLED home 2 XL S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030056

E-Nr. 924700184

Highlights

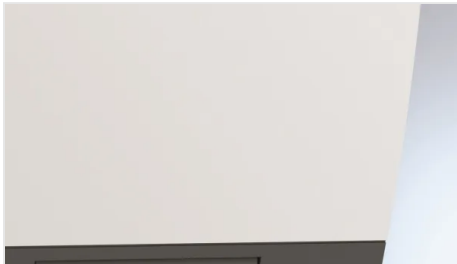


Including STEINEL LED system



HCMC cooling system



UV-resistant plastic

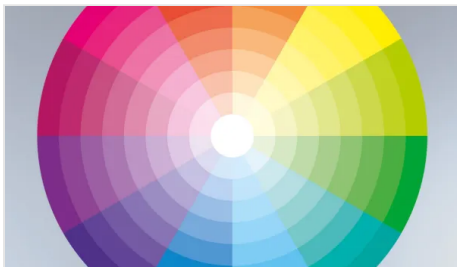

Colour rendering index Ra ≥ 80



Optional corner wall mount bracket

XLED home 2 XL S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030056
E-Nr. 924700184

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841053086	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphit	Accessory
 4007841055615	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse weiss	Accessory
 4007841055875	Eckwandhalter XLED Home 2/ Protect/ Pro 240 schwarz	Accessory
 4007841053109	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse silber	Accessory

ORDERING INFORMATION

Art.-Nr.

030056

EAN

4007841030056

E-Number

924700184

Typ

XLED home 2 XL S Anthracite

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss