

IR Quattro HD-2 24m - Multipack (48 pieces) Multipack

neva
lux

PRESENCE DETECTOR

EAN 4007841094683

- Passive infrared presence detector with square 360° detection
- 5.200 switching zones for the finest detection
- Offers the largest detection range in our IR range
- 4 pyro sensors individually de-/activatable
- Sensitivity digitally adjustable
- Measures presence and brightness
- Temperature and humidity measurement with IP, KNX and DALI-2 IPD
- Setting and networking via Bluetooth
- Ideal for open-plan offices and classrooms

 **steinel**

67 x 103 x 103 mm



IR Quattro HD-2 24m - Multipack (48 pieces) Multipack

PRESENCE DETECTOR

EAN 4007841094683

Technical Data

IDENTIFICATION		CONNECTIVITY		With remote control		No
Version	Presence detector	Networking	Yes	Twilight setting teach		Yes
DIMENSIONS		Networking via	KNX bus Bluetooth Mesh	HOUSING & MATERIAL		
Dimensions L x W x H	67 x 103 x 103 mm	KNX functions	Comfort Photo-cell controller Individual pyro evaluation Basic light level function Light level HVAC output Constant-lighting control Light output 4x Humidity output Presence output Day / night function Dewpoint Temperature output Logic gate	Protection class (IP)		IP20
ELECTRICAL		With bus coupler	Yes	Ambient temperature		from 0 up to 40 °C
Mains connection	30 V	LIGHTING TECHNOLOGY		Mounting location		ceiling
Supply voltage detail	KNX bus	Continuous light	selectable	Application location		Indoors
SENSOR TECHNOLOGY		Constant light regulation	Yes	Mounting type		Concealed wiring
Max. mounting height	10,00 m	SETTINGS		Material		Plastic
Sensor technology	passive infrared	Twilight switch	Yes	Application room		Indoors changing room classroom conference room / meeting room dining hall / staff restaurant duty room high-bay warehouse lecture hall multi-storey / underground car park open- plan office production facilities reception / lobby recreation room sports hall
Detection angle	360 °	Twilight setting	2 – 2000 lx	RAL colour		9003
Segment-by-segment masking	Yes	Time setting	10 s – 1092 Min.	SCOPE OF DELIVERY & WARRANTY		
Electronic scalability	Yes	Base light function	Yes	Manufacturer warranty		5 years
Mechanical scalability	Yes	Main light adjustable	Yes	Corner wall bracket included		No
Radial range	9 x 9 m (81 m²)	Settings via	Bus ETS software App Potentiometers Bluetooth Mesh			
Tangential range	24 x 24 m (576 m²)					
Mounting height	2,50 – 10,00 m					
Presence range	9 x 9 m (81 m²)					
Optimal mounting height	2,8 m					


IR Quattro HD-2 24m - Multipack (48 pieces) Multipack

PRESENCE DETECTOR

EAN 4007841094683

Illustrations

TECHNICAL DRAWINGS

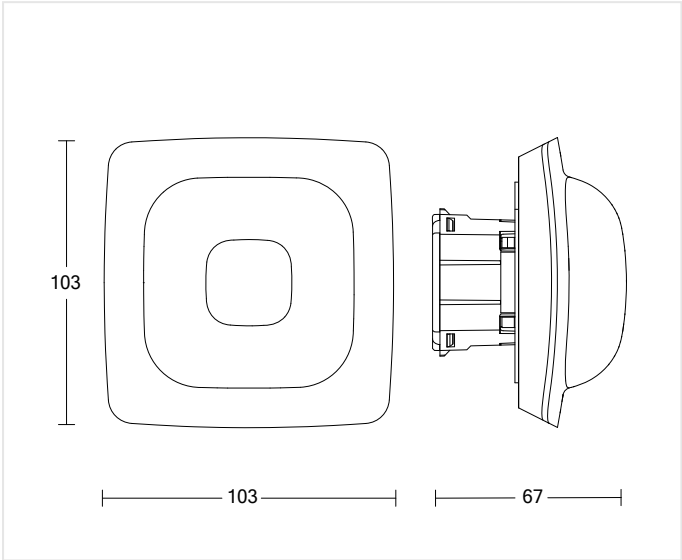

67 x 103 x 103 mm

MOUNTING HEIGHT

2,50 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
---------------------------	------------------	----------------

IR Quattro HD-2 24m - Multipack (48 pieces) Multipack

EAN 4007841094683

PRESENCE DETECTOR

Highlights



UV-resistant plastic

IR Quattro HD-2 24m - Multipack (48 pieces) Multipack

PRESENCE DETECTOR

EAN 4007841094683

Accessories

ORDERING INFORMATION	
Art.-Nr.	094683
EAN	4007841094683
Typ	IR Quattro HD-2 24m - Multipack (48 pieces) Multipack
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	