LED Insert B1500 3K ON-OFF 110°

LED LIGHTING INSERT, WIDE BEAM

Product code **221271**

- For professional refurbishment of luminaires with T5 or T8 fluorescent tubes
- Universal use for all lighting tasks
- Excellent efficiency and durability
- Connect accessories available with powerful IoT lighting control for next-generation lighting projects (swarm function, grouping, cleaning light, etc.)
- Magnetic attachment for easy and quick mounting
- 2 power classes, 5 lengths, 3 optics and 3 light colors available

1421 x 32 x 24 mm



LED Insert B1500 3K ON-OFF 110°

LED LIGHTING INSERT, WIDE BEAM

Product code **221271**

Technical Data

IDENTIFICATION

Variant	**1 tube**
Version	**Standard**
Model	**1500 mm**

DIMENSIONS

Dimensions L × W × H	**1421 x 32 x 24 mm**

ELECTRICAL

Mains connection	**220…240 V / 50 – 60 Hz**
Power	**36.6 W**
Replaceable driver	**Yes**
Type of wiring	**Suitable for through wiring**
LED rated current	**300 mA**

SENSOR TECHNOLOGY

With motion detector	**No**

CONNECTIVITY

Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Colour temperature	**3000 K**
Colour rendering index	**80-89**
Illuminant	**LED**
Luminous flux	**5803 lm**
Beam angle	**110°**
Luminaire luminous efficacy	**159 lm/W**

LIFETIME

LED lifespan (25 °C)	**72000 h**

SETTINGS

DALI dimming	**No**
With emergency light	**No**
Suitable for light band configuration	**Yes**

HOUSING & MATERIAL

Protection class (IP)	**IP20**
Protection class	**I**
Ambient temperature	**-25…55 °C**
Housing material	**Aluminum**
Cover material	**PMMA**
Mounting type	**lighting insert**
Colour	**Aluminum**
With gear tray	**No**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**

CERTIFICATES & EPREL

EPREL energy efficiency class	**C**


LED Insert B1500 3K ON-OFF 110°

LED LIGHTING INSERT, WIDE BEAM

Product code **221271**

Illustrations

TECHNICAL DRAWINGS

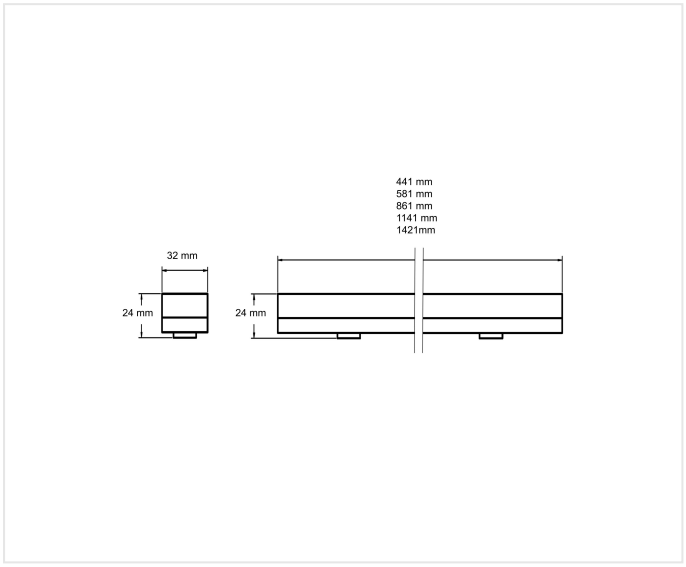

1421 x 32 x 24 mm


LED Insert B1500 3K ON-OFF 110°

LED LIGHTING INSERT, WIDE BEAM

Product code **221271**


Wiring Diagrams

WIRING DIAGRAM 1

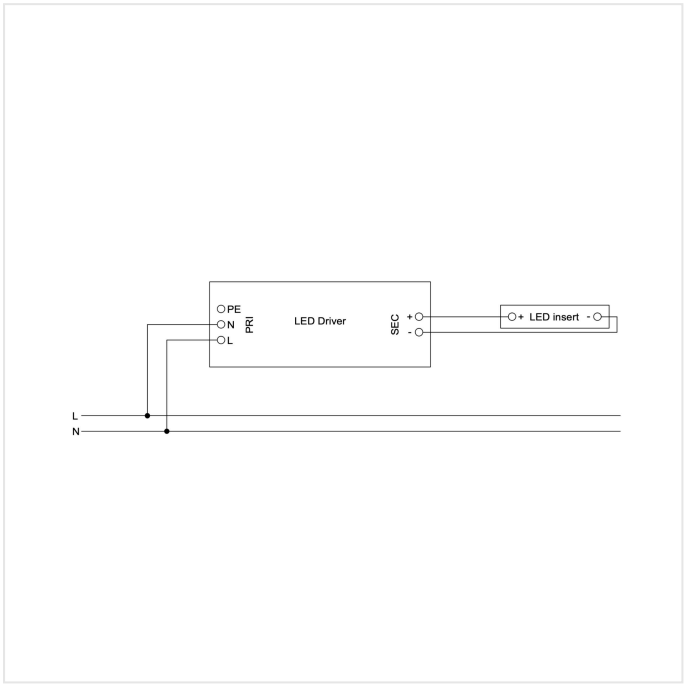

Wiring diagram

WIRING DIAGRAM 2

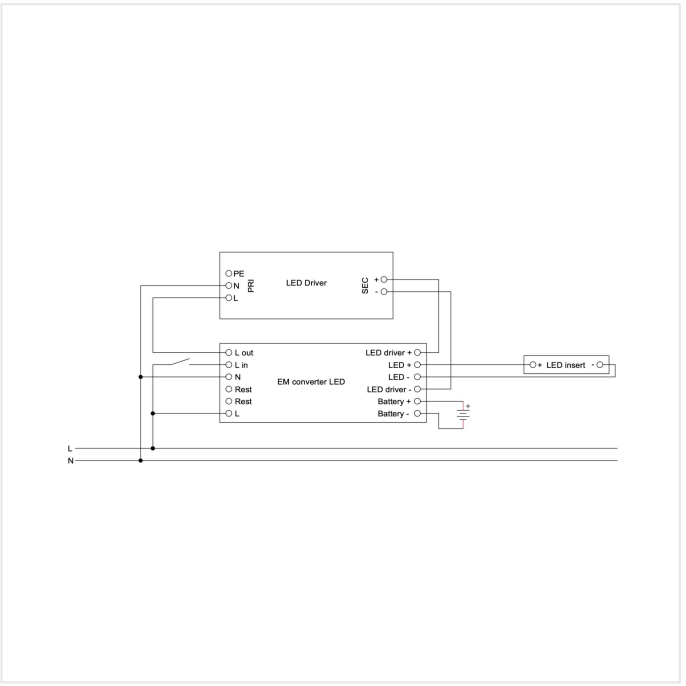

Wiring diagram Self-contained Emergency light

LED Insert B1500 3K ON-OFF 110°

LED LIGHTING INSERT, WIDE BEAM

Product code **221271**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	221935	**Connect Smartlink HF3 Astra PSU**	Connect accessories for DALI luminaires
	220688	**Emergency Package 1h (250V/3.5W)**	Self-contained emergency lighting with self-test function
	221963	**LED Insert M-Set 3SK**	Mounting set LED Insert, 3 metal discs and screws,3 adhesive pads
	221964	**LED Insert M-Set 3S**	Mounting set LED Insert, 3 metal discs and screws
	221968	**LED Insert B M-Set K**	Mounting set LED Insert B, 2 brackets

ORDERING INFORMATION

Art.-Nr.	221271
Typ	**LED Insert B1500 3K ON-OFF 110°**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss