MotionSwitch LED Z-Wave

MOTION DETECTOR

EAN 4007841035402

- Smart home via power socket. No cable. No batteries. No stress. The MotionSwitch LED Z-Wave is a motion detector, brightness sensor, button and orientation light in one. Above all, it is easy to integrate and operate: plug into the power socket, install via the Smart Friends app and control indoor lights, roller-shutter motors, sound systems, alarm systems etc. easily and conveniently.

steinel

56 x 55 x 55 mm



MotionSwitch LED Z-Wave

MOTION DETECTOR

EAN 4007841035402

Technical Data

IDENTIFICATION

Version	Motion detectors

DIMENSIONS

Dimensions L × W × H	56 x 55 x 55 mm

ELECTRICAL

Mains connection	230 V / 50 – 60 Hz
Power	1,5 W
Own consumption	0,3 W

SENSOR TECHNOLOGY

Max. mounting height	1,10 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	180 °
Opening angle	90 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	No
Mechanical scalability	No
Radial range	r = 4 m (25 m²)
Tangential range	r = 20 m (628 m²)
Mounting height	0,20 – 1,10 m
Optimal mounting height	1,1 m

CONNECTIVITY

Networking	Yes
Networking via	Wireless

LIGHTING TECHNOLOGY

Soft light start	No
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 min
Base light function	Yes
Main light adjustable	No
Functions	Sensor channel, Orientation light
Settings via	Z-Wave, Potentiometers
With remote control	No
Twilight setting teach	No

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	-10...+35 °C
Housing material	Plastic
Mounting location	Wall
Application location	Indoors
Mounting type	Other
Material	Plastic
Application room	Indoors, WC / washroom, function room / ancillary room
Colour	White
RAL colour	9010

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	3 years
Corner wall bracket included	No

CERTIFICATES & EPREL

Certificates	VDE


MotionSwitch LED Z-Wave

MOTION DETECTOR

EAN 4007841035402

Illustrations

TECHNICAL DRAWINGS

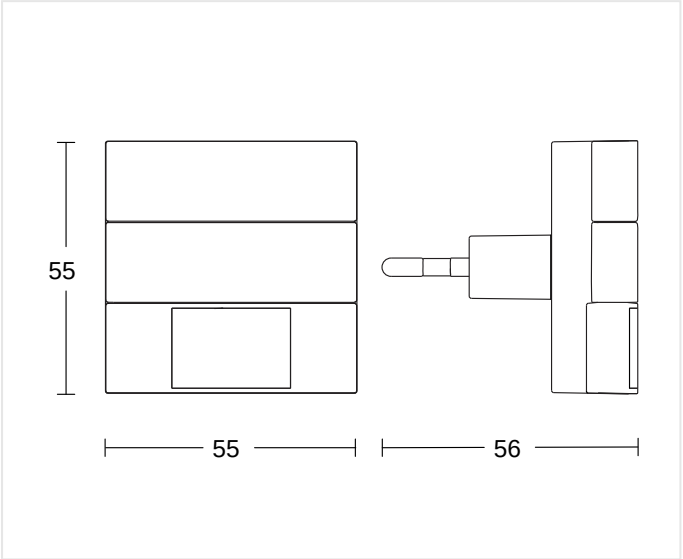

56 x 55 x 55 mm

MOUNTING HEIGHT

0,20 – 1,10 m	1,1 m	1,10 m
BEREICH	OPTIMAL	MAX

MotionSwitch LED Z-Wave

MOTION DETECTOR

EAN 4007841035402

Accessories

ORDERING INFORMATION

Art.-Nr.	4007841035402
EAN	4007841035402
Typ	**MotionSwitch LED Z-Wave**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss